


Strip Nails


Pin/Brad Chart

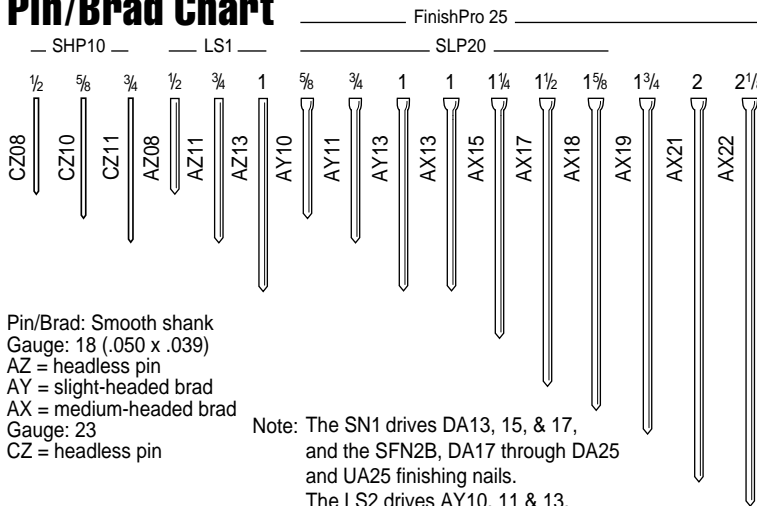

Pin/Brad: Smooth shank
 Gauge: 18 (.050 x .039)
 AZ = headless pin
 AY = slight-headed brad
 AX = medium-headed brad
 Gauge: 23
 CZ = headless pin

Note: The SN1 drives DA13, 15, & 17, and the SFN2B, DA17 through DA25 and UA25 finishing nails.
 The LS2 drives AY10, 11 & 13.
 The LS5 drives AX13, 15 & 17.


Finish Nails

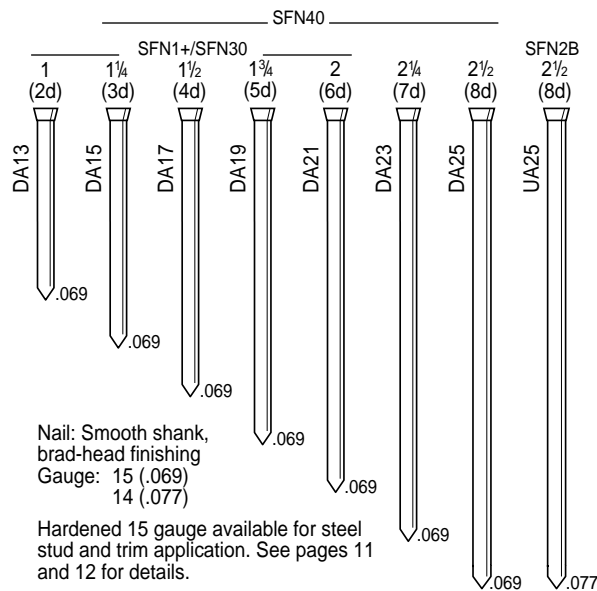

Nail: Smooth shank, brad-head finishing
 Gauge: 15 (.069)
 14 (.077)

Hardened 15 gauge available for steel stud and trim application. See pages 11 and 12 for details.

Full Round-Head Coil Nails

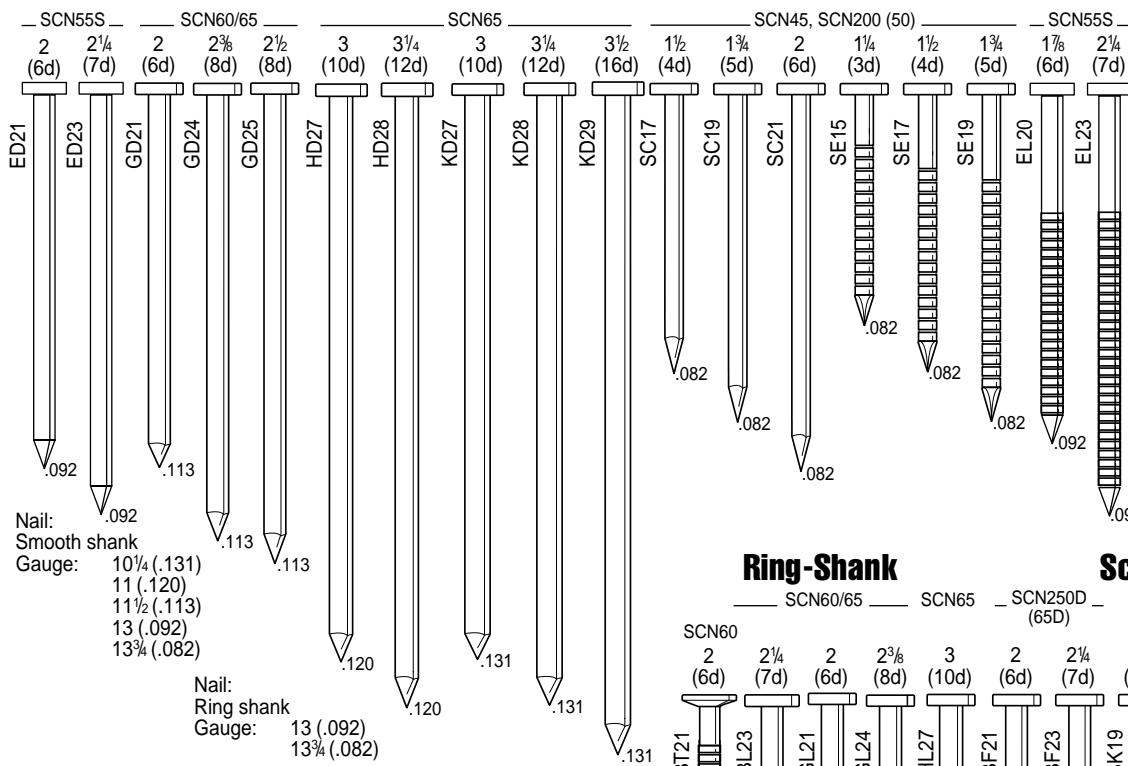


Nail: Smooth shank
 Gauge: 10 1/4 (.131)
 11 (.120)
 11 1/2 (.113)
 13 (.092)
 13 3/4 (.082)

Nail: Ring shank
 Gauge: 13 (.092)
 13 3/4 (.082)


Note: BK nails are available in both regular as well as high load coils, except BK19, which comes only in 3000 high load coils.

Drywall Coil Nails Ring-Shank

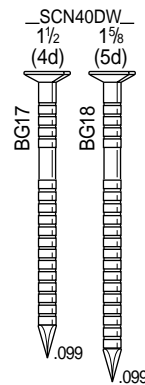

Ring-Shank


Screw-Shank

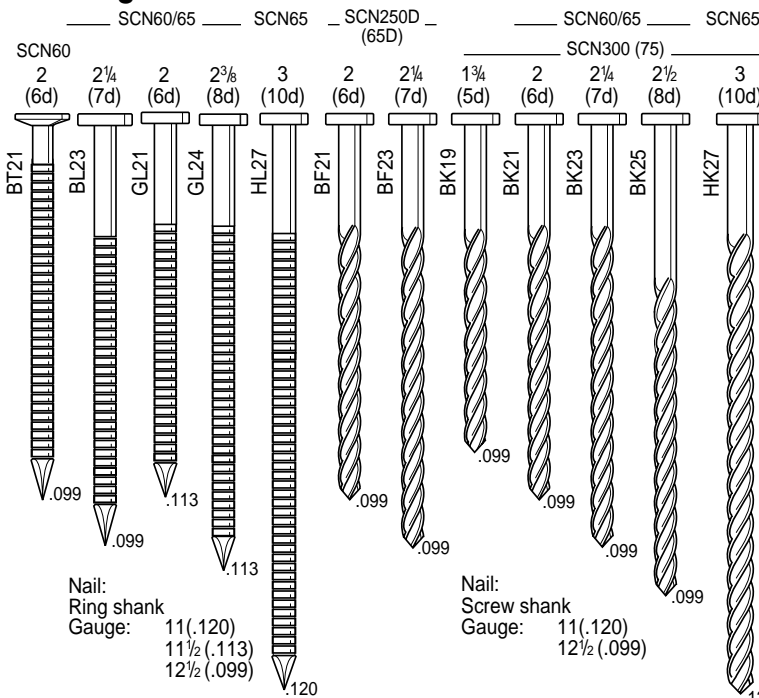

Nail: Ring shank
 Gauge: 11 (.120)
 11 1/2 (.113)
 12 1/2 (.099)

Nail: Screw shank
 Gauge: 11 (.120)
 12 1/2 (.099)

Roofing Coil Nails

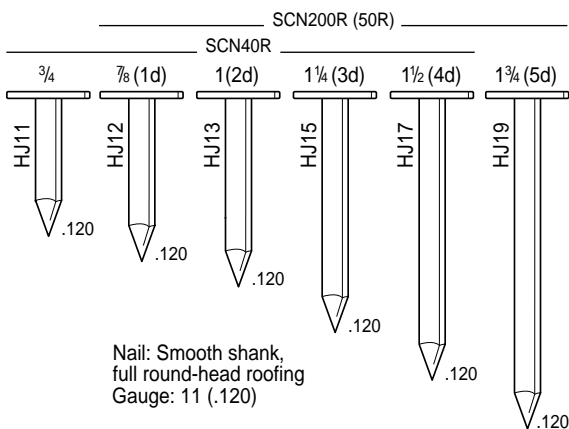

Nail: Smooth shank, full round-head roofing
 Gauge: 11 (.120)