

SENCO° OUR MISSION

SENCO is dedicated to delivering innovative fastening systems that make hard work easier. No matter where or how you work, we are committed to making your jobsite, workshop, or workplace safer and more productive.





U.S. MANUFACTURING

Since our founding in 1948, Senco has been committed to supporting local communities by creating jobs. From our in-house design and engineering teams to tool assembly, testing, fastener manufacturing, sales, and front-of-house operations, our employees are the driving force behind everything we do at SENCO.

Having a well-rounded team allows for more innovative processes, technologies, and products, keeping SENCO competitive in an ever-expanding market and meeting the evolving needs of consumers.

INNOVATION

When choosing SENCO, you are not only getting the highest quality products - you're supporting American manufacturing. Most SENCO fasteners are made at our 500,000 square-foot facility in Cincinnati, Ohio.

At SENCO, our mission is simple — make hard work easier. We innovate in several aspects of the tool and fastener manufacturing industry, ensuring we meet present needs of the market without compromising the potential of future generations to come.

SAFETY

We design our products with safety in mind and have developed resources for the industry to promote safety on their job sites. SENCO applies those same practices to our workplace, to ensure the well-being of every employee in our facilities.

COMMUNITY

SENCO supports Homes for Our Troops by hosting an annual charity golf outing, benefiting the organization's mission of providing specially adapted homes for severely injured post-9/11 veterans. Through this partnership, SENCO not only contributes monetarily, but also raises awareness and solidarity for the brave men and women who have sacrificed for their country.







Each month barges deliver over 2,000 tons of steel rod to SENCO's manufacturing facility. All the steel we use to produce our fasteners is made from 100% recycled material that we source from steel mills here in the U.S.

RECYCLED STEEL

The wire is sent through an in-house cleaning process to ensure superior tape adhesion. From there, it gets drawn down to produce over 700 varieties of fasteners in our manufacturing facility in Cincinnati, Ohio.

Over 95% of the leftover metal scrap from this process is sent off to the other U.S. manufacturers and recyclers, keeping more out of landfills and supporting a circular economy.

SENCO is dedicated to continuously minimizing volatile organic compound (VOC) emissions, a key contributor to air pollution. This not only contributes to a healthier environment for employees, but also fosters a safer atmosphere for the surrounding communities.

SENCO is also committed to reducing transportation emissions. By leveraging barge transport, SENCO significantly cuts down on emissions, further reinforcing our commitment to sustainability and environmental responsibility.



DURASPIN[™]

PRODUCTIVITY REDEFINED

DURASPIN® screw systems help you get the job done up to four times faster than bulk screwdrivers and loose screws, improving job site productivity by more than 30%.

APPLICATIONS

Our full line of integrated tools, attachments, kits, and accessories can tackle almost any job including drywall, sub-flooring, decking, metal framing, and a variety of commercial and industrial applications. For projects with tough requirements, our wide selection of ICC and Miami-Dade certified screws will keep your job on target. Check out our next generation of DURASPIN® auto-feed screw systems with enhanced features that redefine productivity and help you get the job done faster and easier.

KEY FEATURES

- Patented corner-fit feed system for better screw placement in tight spaces and corners
- · Locking depth of drive adjustment
- Tool-free adjustable nosepiece
- Easily load 50 screws in less than a second
- Trigger lock for continuous operation
- Long-lasting drive bits with quick-slide release

DURASPIN COLLATED SCREW SYSTEMS

2" 5000 RPM CORDLESS COLLATED SCREWDRIVER





DS222-18V 2" 2500 RPM CORDLESS COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- 5000 RPM high speed brushless motor
- Precise depth of drive adjustment with depth lock

APPLICATIONS

For drywall (into wood or light gauge steel studs), subfloor, sheathing, cement board, underlayment

TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- Selectable 2500/1600 RPM high torque brushless motor
- Precise depth of drive adjustment with depth lock

APPLICATIONS

High torque applications including metal framing/ decking, crating, gypsum/ sheathing to heavy steel

DS322-18V

3" 2500 RPM CORDLESS COLLATED SCREWDRIVER





TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- Selectable 2500/1600 RPM high torque brushless motor
- Precise depth of drive adjustment with depth lock

APPLICATIONS

High torque applications including flooring, decking, docks, crating, gypsum/ sheathing to heavy steel, tile roofing



MODEL NAME ITEM #	DS225-18V 10A0002N	DS222-18V 10B0002N	DS322-18V 10C0002N	
Speed (RPM)	0-5000	0-1600, 0-2500 (Selectable)	0-1600, 0-2500 (Selectable)	
Voltage	18V	18V	18V	
Weight w/ Battery	5.1 lbs (2.3 kg)	5.3 lbs (2.4 kg)	5.4 lbs (2.5 kg)	
Height	9.6" (244 mm)	9.6" (244 mm)	9.6" (244 mm)	
Length	13.7" (348 mm)	13.7" (348 mm)	14.5" (368 mm)	
Width	3.4" (86.4 mm)	3.4" (86.4 mm)	3.4" (86.4 mm)	
Warranty	5 yr	5 yr	5 yr	
FASTENERS		FASTENERS ARE LOCATED ON PAGES 8-11		
Range	1"-2"*	1"-2"*	1"-3"	
Shank Diameter	#6-#8	#6-#12	#6-#12	

CS SSHEWE 5000 RPM/TPM

TOOL OVERVIEW

- Drives #6 to #10 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- · Tool-free screw length adjustment
- Variable speed trigger with lock & reverse

APPLICATIONS

High speed applications including drywall (into wood or light gauge steel studs), subfloor, sheathing, cement board, underlayment

DS242-AC

2" 120V 2500 RPM COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Tool-free screw length adjustment
- Variable speed trigger with lock & reverse

APPLICATIONS

High torque applications including metal framing, decking, gypsum sheathing, sheathing to heavy steel

DS342-AC

3" 120V 2500 RPM COLLATED SCREWDRIVER



TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Tool-free screw length adjustment
- Variable speed trigger with lock & reverse

APPLICATIONS

High torque applications including flooring, decking, docks, crating, gypsum/ sheathing to steel



MODEL NAME ITEM #	DS245-AC 10D0001N	DS242-AC 10E0001N	DS342-AC 10F0001N
Speed (RPM)	0-5000	0-2500	0-2500
Voltage	6.0	6.0	6.0
Current (Amps)	120V/60Hz	120V/60Hz	120V/60Hz
Weight w/ Battery	5.5 lbs (2.5 kg)	5.7 lbs (2.6 kg)	6.7 lbs (3.0 kg)
Height	9.7" (246 mm)	9.7" (246 mm)	9.7" (246 mm)
Length	16.3" (417 mm)	16.4" (417 mm)	17.2" (437 mm)
Width	3.2" (81 mm)	3.2" (81 mm)	3.2" (81 mm)
Warranty	5 yr	5 yr	5 yr
FASTENERS		FASTENERS ARE LOCATED ON PAGES 8-	11
Range	1"-2"*	1"-2"*	1"-3"
Shank Diameter	#6-#10	#6-#12	#6-#12

2500 RPM SCREWDRIVER & ATTACHMENT KIT







TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- 3-In-1 tool kit
- Feed on return
- Patented sliding screw guide
- Corner-fit feed system
- High-torque 0-2500 rpm motor

APPLICATIONS

For wood & composite decking, cement board, sub-flooring & underlayment, sheathing to steel, steel decking, drywall to wood or steel

TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- 3-In-1 tool kit
- Feed on return
- Patented sliding screw guide
- Corner-fit feed system
- · High-speed 0-4000 rpm motor

APPLICATIONS

For sub-flooring, underlayment, wood & composite decking, cement board, drywall to wood, drywall to steel

SG2510

HIGH PERFORMANCE 2500 RPM SCREWDRIVER





SG4100

HIGH PERFORMANCE 4000 RPM SCREWDRIVER





TOOL OVERVIEW

- · Metal gear housing for increased durability & reliability
- Depth sensitive clutch with adjustable nose cone for precise depth control
- 10' cord for greater mobility
- · Reversing lever
- Trigger lock

APPLICATIONS

For wood & composite decking, cement boards, sheathing to steel, metal framing, drywall to wood & steel, subfloor, underlayment

TOOL OVERVIEW

- · Metal gear housing for increased durability & reliability
- Depth sensitive clutch with adjustable nose cone for precise depth control
- 10' cord for greater mobility
- Reversing lever
- Trigger lock

APPLICATIONS

For drywall (to wood or light steel studs), underlayment, cement boards, wood decks

MODEL NAME ITEM #	DS532-AC 10X0003N	DS534-AC 10X0013N	SG2510 6X0002N	SG4100 6X0004N	
Speed (RPM)	0-2500	0-4000	0-2500	0-4000	
Current (Amps)	6.5	6.5	6.5	6.5	
Weight	7 lbs (3.2 kg)	7 lbs (3.2 kg)	3.6 lbs (1.6 kg)	3.4 lbs (1.5 kg)	
Height	7" (178 mm)	7" (178 mm)	7.5" (191 mm)	7.5" (191 mm)	
Length	40.5" (1029 mm)	40.5" (1029 mm)	12.5" (318 mm)	12" (305 mm)	
Width	2.75" (70 mm)	2.75" (70 mm)	2.5" (64 mm)	2.5" (64 mm)	
Warranty	5 yr	5 yr	5 yr	5 yr	
FASTENERS	FASTENERS ARE LOCATED ON PAGES 8-11				
Range	1"-3"	1"-3"	-	-	
Shank Diameter	#6-#12	#6-#12	-	-	

2" COLLATED SCREWDRIVER ATTACHMENT





DS230-M12" COLLATED SCREWDRIVER ATTACHMENT





TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Easily remove attachment to access bit
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

SG4100

FOR SENCO MODELS:

• SG2510

TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Easily remove attachment to access bit
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

FOR MAKITA MODELS:

- FS2200 XSF03
- FS2500 XSF04
- FS4200 XSF05
- FS6200

DS230-D1

2" COLLATED SCREWDRIVER ATTACHMENT (INCLUDES ADAPTER)





DS230-D2

2" COLLATED SCREWDRIVER ATTACHMENT





TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

FOR DEWALT MODELS (CORDED):

- DW252
- DW266DW272
- DW253DW255
 - 5 DW276
- DW257

TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 2" in length
- Patented corner-fit feed system
- Feed on return functionality to improve speed & reliability of drives
- Universal nosepiece for drywall & wood applications

APPLICATIONS

Ideal for drywall (into wood or steel studs), metal framing, sheathing, cement board

FOR DEWALT MODELS (CORDLESS):

• DCF620 • DCF630

MODEL NAME ITEM #	DS230-S1 9Z0001N	DS230-M1 9Z0021N	DS230-D1 9Z0011N	DS230-D2 9Z0012N	
Weight	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	
Height	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)	
Length	11.0" (280 mm)	11.0" (280 mm)	10.8" (274 mm)	10.3" (262 mm)	
Width	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)	
Warranty	5 yr	5 yr	5 yr	5 yr	
FASTENERS	FASTENERS ARE LOCATED ON PAGES 8-11				
Range	1"-2"	1"-2"	1"-2"	1"-2"	
Shank Diameter	#6-#12	#6-#12	#6-#12	#6-#12	





TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Feed on return
- · Patented sliding screw guide
- Corner-fit feed system
- Quick release clamp

APPLICATIONS

Sheathing, decking, underlayment, sub-flooring, steel decking, drywall, cement board, rigid foam insulation

FOR SENCO MODELS:

• SG2510 • SG4100

TOOL OVERVIEW

- Drives #6 to #12 collated screws 1" to 3" in length
- Feed on return
- Patented sliding screw guide
- · Corner-fit feed system
- · Quick release clamp

APPLICATIONS

Sheathing, decking, underlayment, sub-flooring, steel decking, drywall, cement board, rigid foam insulation

FOR MAKITA MODELS:

- FS2200 XSF03
- FS2500 XSF04
- FS4200 XSF05
- FS6200

DS530-D1

3" COLLATED SCREWDRIVER ATTACHMENT



TOOL OVERVIEW


- Drives #6 to #12 collated screws 1" to 3" in length
- Feed on return
- · Patented sliding screw guide
- Corner-fit feed system
- · Quick release clamp

APPLICATIONS

Sheathing, decking, underlayment, sub-flooring, steel decking, drywall, cement board, rigid foam insulation

FOR DEWALT MODELS:

- DCF624
- DW257
- DW252DW253
- DW266DW272
- DW255
- DW272DW276

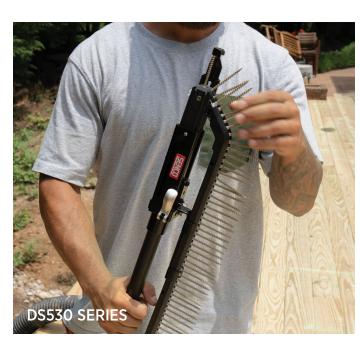

TOOL SPECIFICATIONS

MODEL NAME ITEM #	DS530-S1 10X0002N	DS530-M1 10X0022N	DS530-D1 10X0012N	
Weight	3.4 lbs (1.5 kg)	3.4 lbs (1.5 kg)	3.4 lbs (1.5 kg)	
Height	3.5" (89 mm)	3.5" (89 mm)	3.5" (89 mm)	
Length	33" (838 mm)	33" (838 mm)	33" (838 mm)	
Width	2.75" (70 mm)	2.75" (70 mm)	2.75" (70 mm)	
Warranty	5 yr	5 yr	5 yr	
FASTENERS	FASTENERS ARE LOCATED ON PAGES 8-11			
Range	1"-3"	1"-3"	1"-3"	
Shank Diameter	#6-#12	#6-#12	#6-#12	

Additional bits, adapters & nosepieces sold separately, see pages 12-13



DRYWALL TO WOOD







Gauge	Length	Finish	Thread	Quantity	Item Code
6	11⁄4″	Gray Phosphate	Coarse	1000 Tub	06A125P
6	11/4"	Gray Phosphate	Coarse	4000 Box	06A125PB
6	15/8"	Gray Phosphate	Coarse	1000 Tub	06A162P
6	15/8″	Gray Phosphate	Coarse	4000 Box	06A162PB
7	2"	Gray Phosphate	Coarse	1000 Tub	07A200P
8	2½"	Gray Phosphate	Coarse	1000 Box	08A250PK
6	15/8"	Epoxy E-Coat/Green	Coarse	1000 Tub	06A162W



DRYWALL TO LIGHT STEEL



#2 PHILLIPS DUGLE





SHARP





Gauge	Length	Finish	Thread	Quantity	Item Code
6	11/4"	Gray Phosphate	Fine	1000 Tub	06B125P*
6	11/4"	Gray Phosphate	Fine	4000 Box	06B125PB*
6	15/8"	Gray Phosphate	Fine	1000 Tub	06B162P*
6	15/8"	Gray Phosphate	Fine	4000 Box	06B162PB*
6	2"	Gray Phosphate	Fine	4000 Box	06B200PB*



GYPSUM TO STEEL



#2 PHILLIPS (\(\sum_{\infty}\)



BUGLE



DRILL

-1111111111111111111111111111111111



Gauge	Length	Finish	Thread	Quantity	Item Code
6	11⁄4″	Gray Phosphate	Fine	4000 Box	06C125PB*
6	15/8"	Gray Phosphate	Fine	4000 Box	06C162PB*
6	2"	Gray Phosphate	Fine	4000 Box	06C200PB*
6	1¼"	Clear Zinc	Fine	4000 Box	06C125CB*
6	15/8"	Clear Zinc	Fine	4000 Box	06C162CB*
6	2"	Clear Zinc	Fine	4000 Box	06C200CB*
6	11/4"	Epoxy E-Coat/Green	Fine	1000 Box	06C125WK*
6	15/8"	Epoxy E-Coat/Green	Fine	1000 Box	06C162WK*
8	3"	Epoxy E-Coat/Green	Fine	1000 Box	08C300WK*



WOOD TO WOOD



#2 PHILLIPS ()



TRIM HEAD & NIBS (



Gauge	Length	Finish	Thread	Quantity	Item Code
7	1"	Gray Phosphate	High Low	4000 Box	07Q100PB





WOOD TO WOOD (CONT.)





#2 SQUARE (TRIM HEAD & NIBS ()



SHARP

Gauge	Length	Finish	Thread	Quantity	Item Code
7	11/4"	Gray Phosphate	High Low	4000 Box	07Q125PBQ







SHARP

N	
/4+++-	

Gauge	Length	Finish	Thread	Quantity	Item Code
8	1½"	Yellow Zinc	Coarse	1000 Tub	08F150Y
8	13/4"	Yellow Zinc	⅔ Coarse	1000 Tub	08F175Y
8	2"	Yellow Zinc	⅔ Coarse	1000 Tub	08F200Y
8	2½"	Yellow Zinc	⅔ Coarse	800 Tub	08F250Y
8	2½"	Yellow Zinc	⅔ Coarse	1000 Box	08F250YK
8	3"	Yellow Zinc	⅔ Coarse	800 Tub	08F300Y
8	3"	Yellow Zinc	⅔ Coarse	1000 Box	08F300YK







THILLIAN STATES

Gauge	Length	Finish	Thread	Quantity	Item Code
8	11⁄4″	Clear Zinc	Coarse	4000 Box	08L125CBLCTS







Gauge	Length	Finish	Thread	Quantity	Item Code
8	1½"	Yellow Zinc	Double	1000 Box	08F150YTK
8	13/4"	Yellow Zinc	⅔ Double	1000 Box	08F175YTK
8	2"	Yellow Zinc	⅔ Double	1000 Tub	08F200YTK







TYPE 17

THITTITIES

Gauge	Length	Finish	Thread	Quantity	Item Code
8	13/4"	Yellow Zinc	Coarse	4000 Box	08L175YB



#2 SQUARE ()



TRIM HEAD & NIBS



SHARP

Gauge	Length	Finish	Thread	Quantity	Item Code
8	2"	Yellow Zinc	High Low	4000 Box	08F200YBTHSS

DECKING TO WOOD



#2 SQUARE FLAT





TYPE 17





Gauge	Length	Finish	Thread	Quantity	Item Code
8	13/4"	Epoxy E-Coat/Tan	⅔ Coarse	1000 Tub	08D175W
8	2"	Epoxy E-Coat/Tan	⅔ Coarse	1000 Tub	08D200W**
8	2½"	Epoxy E-Coat/Tan	⅔ Coarse	800 Tub	08D250W**
8	2½"	Epoxy E-Coat/Tan	⅔ Coarse	1000 Box	08D250WK**
8	3"	Epoxy E-Coat/Tan	⅔ Coarse	800 Tub	08D300W**
8	3"	Epoxy E-Coat/Tan	⅔ Coarse	1000 Box	08D300WK**
8	2½"	Stainless	⅔ Coarse	800 Tub	08D250S
9	3"	Stainless	⅔ Coarse	800 Tub	09D300S



COMPOSITE DECKING TO WOOD




#2 SQUARE



TRIM



TYPE 17



Gauge	Length	Finish	Thread	Quantity	Item Code
8	2½"	Epoxy E-Coat/Tan	Coarse	800 Tub	08R250W
8	3"	Epoxy E-Coat/Tan	Coarse	800 Tub	08R300W



#2 SQUARE



CUPPED PAN



SHARP

Gauge	Length	Finish	Thread	Quantity	Item Code
8	2½"	Epoxy E-Coat/Gray	Multi-Thread	800 Tub	08S250W003
8	2½"	Epoxy E-Coat/Brown	Multi-Thread	800 Tub	08S250W497
8	2½"	Epoxy E-Coat/Tan	Multi-Thread	800 Tub	08S250W592



WOOD TO LIGHT STEEL




#2 SQUARE (



FLAT



SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1½"	Clear Zinc	Double	1000 Tub	08G150CTLDSS





WAFER



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1"	Clear Zinc	Fine	4000 Box	08G100CBWFDS
10	11/4"	Clear Zinc	Fine	4000 Box	10G125CBWFDS



WOOD TO STEEL




#2 SQUARE ()



FLAT



PILOT





Gauge	Length	Finish	Thread	Quantity	Item Code
8	2"	Clear Zinc	Fine	1000 Box	08G200CKLFPS*



#2 SQUARE



WAFER & NIBS



WING DRILL





Gauge	Length	Finish	Thread	Quantity	Item Code
8	15/8″	Clear Zinc	Fine	1000 Tub	08G162CTWFWS
10	15/8"	Clear Zinc	Fine	1000 Tub	10G162CTWFWS
8	2"	Epoxy E-Coat/Green	Fine	1000 Tub	08G200WTWFWS
8	2½"	Epoxy E-Coat/Green	Fine	1000 Box	08G250WWK*







#3 WING DRILL





Gauge	Length	Finish	Thread	Quantity	Item Code
12	13/4"	Yellow Zinc	Fine	1000 Box	12G175YKLFAX*







#5 WING DRILL





Gauge	Length	Finish	Thread	Quantity	Item Code
12	2"	Yellow Zinc	Fine	1000 Box	12G200YKLFCX*
12	2½"	Yellow Zinc	Fine	1000 Box	12G250YKLFCX*







LIGHT METAL TO METAL



#2 PHILLIPS



MOD TRUSS



SHARP





Gauge	Length	Finish	Thread	Quantity	Item Code
8	1/2"	Clear Zinc	Fine	1000 Tub	08M050CTRFSP*
10	3/4"	Clear Zinc	Fine	1000 Box	10M075CSK



#2 PHILLIPS



MOD TRUSS



DRILL



	Gauge	Length	Finish	Thread	Quantity	Item Code
Ī	8	1/2"	Clear Zinc	Fine	1000 Tub	08M050CTRFDP*
	10	3/4"	Clear Zinc	Fine	1000 Box	10M075CDK*



METAL TO METAL







DRILL





Gauge	Gauge Length Finish		Thread	Quantity	Item Code	
10	3/4"	Clear Zinc	Fine	1000 Tub	10M075CTMFDS*	
10	1"	Clear Zinc	Fine	1000 Box	10M100CKMFDS*	





FLAT PAN



DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code	
10	3/4"	Yellow Zinc	Fine	1000 Tub	10M075YTFFDX*	





FLAT PAN



#4 DRILL





Gauge	Length	Finish	Thread	Quantity	Item Code	
10	3/4"	Yellow Zinc	Fine	8000 Loose	10M075YLFT4X*	
10	3/4"	Yellow Zinc	Fine	1000 Box	10M075YKFT4X*	
10	3/4"	E1000/Clear	Fine	4000 Box	10M075EBFT4X*	
10	3/4"	E1000/White	Fine	4000 Box	10M075E1114B*	
10	3/4"	E1000/Black	Fine	4000 Box	10M075E0004B*	
10	3/4"	E1000/ Charcoal Gray	Fine	4000 Box	10M075E0014B*	
10	3/4" E1000/ Silver Frost Fine		Fine	4000 Box	10M075E0024B*	





FLAT PAN



#4 DRILL







Gauge	Length	Finish	Thread	Quantity	Item Code	
12	7/8"	Yellow Zinc	Fine	1000 Box	12M087YKFF4X*	



REX



FLAT PAN



#3 DRILL





Gauge	Length	Finish	Thread	Quantity	Item Code
12	1"	Yellow Zinc	Fine	1000 Box	12M100YKFF3X*



TRAILER SKIN REPAIR







FLAT PAN



#4 DRILL



Gauge	Length	Finish	Thread Quantity		Item Code
12	7/8"	E1000/Clear	Fine	150 Loose	12M087ELFF4X
12	7/8"	E1000/Black	Fine	150 Loose	12M087E000LFF4X
12	7/8"	E1000/White	Fine	150 Loose	12M087E111LFF4X



CEMENT BOARD TO WOOD



#2 SQUARE (



WAFER & NIBS



SPOON



Gauge	Length	Finish	Thread	Quantity	Item Code
8	B 11/4" Epoxy E-Coat/Green		High Low	1000 Tub	08T125W
8	2"	Epoxy E-Coat/Green	High Low	1000 Tub	08T200W



CEMENT BOARD TO STEEL



#2 SQUARE (



WAFER & NIBS



DRILL



Gauge	Length	Finish	Thread	Quantity	Item Code
8	11/5"	Fnoxy F-Coat/Green	Fine	4000 Box	08T150WBWFDS



SPECIALTY APPLICATIONS





PAN FRAMING



SHARP



Gauge	Length	Finish	Thread	Quantity	Item Code
8	1"	Clear Zinc	Double	4000 Box	08M100CBPDSS




#2 SQUARE



ROUND WASHER



TYPE 17



Gauge	Length	Finish	Thread	Quantity	Item Code
8	11/4"	Clear Zinc	Coarse	4000 Box	08X125CBACTS




#2 SQUARE



ROUND WASHER



DRILL





Gauge	Length	Finish	Thread	Quantity	Item Code
8	11/4"	Clear Zinc	Double	1000 Box	08X125CKADDS*
8	2"	Clear Zinc	Double	1000 Box	08X200CKADDS*

BITS

FOR SENCO	AUTO-F	EED SCREV	VDRIVERS	& ATTACHM	IENT:	S & S	ELEC1	PAM	IFAST	г мог	DELS				
Quantity	Length	TITEM #	O ITEM#	☼ ITEM #		;	Integ auto- screwo	-feed	s		af	ttachr	-feed nents ts		PAM- Fast
2 Pack	6%	EA0297	EA0298	EA0299											
25 Pack	6%	EA0297N*	EA0298N*	EA0299N*											
2 Pack	7 1/8	EA0400	EA0401	EA0402											
2 Pack	711/16	EA0300	EA0301	EA0302											
25 Pack	711/16	-	EA0301N*	-											
2 Pack	85/16	EA0314	EA0315	EA0316											
25 Pack	85/16	-	EA0315N*	EA0316N*											
2 Pack	5½	-	EA0396P	EA0397P											
*Impact bits fo	or use in r	metal applica	ations		DS222-18V	DS225-18V	DS322-18V	DS242-AC	DS245-AC	DS342-AC	DS230 SERIES	DS530 SERIES	DS532-AC	DS534-AC	SELECT MODELS



LOOSE BIT TIP

OR ¼" CHUCK				
Quantity	Chuck	Туре	C ITEM #	Compatible With
10 Pack	1/4"	Rex	EA0308	• •
				SG4100 SG2510



DS530 SERIES ADAPTERS

Quantity	ITEM #	SENCO				DEW	/ALT							MAI	KITA		
1	MB0184	• •															
1	MB0185																
1	MB0183																
1	MB0186																
1	MB0187																
		SG4100 SG2510	DW252	DW253	DW255	DW257	DW266	DW272	DW276	DCF624	FS2200	FS2500	FS4200	FS6200	XSF03	XSF04	XSF05



NOSEPIECES

Quantity	Application	Range	ITEM #		;	auto	rated -feed driver			af	ttachi	-feed nents its	
1	Wood	1"-2"	FB0157										
1	Drywall	1"-2"	FB0181										
1	Metal Channel	1/2"-1"	FB0155										
1	Metal Framing	1/2"-1"	FB0178										
1	General	1"-2"	FC1022										
1	Wood	1"-3"	FB0159										
1	Metal Channel	1/2"-1"	FB0187										
1	Metal Framing	1"-2"	FB0185										
1	General	1"-3"	FC1023										
				DS222-18V	DS225-18V	DS322-18V	DS242-AC	DS245-AC	DS342-AC	DS230 SERIES	DS530 SERIES	DS532-AC	DS534-AC





REPLACEMENT PADS

FOR USE ON NOSEPIECES			
Fits Nosepieces	Description	Quantity	ITEM #
FB0178, FB0185, FC0822, FC0887	Round no-mar pad with adhesive	3	FC0983
FB0157, FB0159	Square non-skid pad with adhesive	3	FA0334
FC1022	No-mar pad with clip	1	HA0332







FINISH & WOODWORKING

THE DIFFERENCE IS IN THE DETAILS

SENCO has set the industry standard for pneumatic finish and fine woodworking tools that are compact, ultra-light, easy-to-use and designed for precision and longevity.

We offer a broader range of tools than anyone else, covering 15–23 gauge nailers and 16–19 gauge staplers, including the industry benchmark FinishPro®42XP.

APPLICATIONS

Cabinetry, furniture, decorative trim, crown molding, custom woodworking applications and all other finish needs.

KEY FEATURES

- · Quick clear latch to clear jams fast
- No-mar pads to protect woodwork
- Clear line-of-sight for precision fastening
- · Comfort grip
- Adjustable depth of drive

Experience FUSION® award-winning cordless convenience in all-day, everyday trim tools.

APPLICATIONS

Finish and trim, fine woodworking, cabinet, furniture, decorative trim.

KEY FEATURES

- FUSION® cordless air-power technology
- Selectable drive switch allows for contact or sequential trigger actuation
- Nose-mounted LED light
- Adjustable belt hook
- · Thumb wheel depth of drive
- Quick clear latch feature for quickly clearing jams
- Includes storage bag, battery and charger







F-16XP

21/2" 16 GA. CORDLESS FINISH NAILER



TOOL OVERVIEW

- Drives 18 GA. brad nails %" to 2%" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Finish & trim, woodworking, paneling, casing, molding, chair rail, decorative trim

TOOL OVERVIEW

- Drives 16 GA. finish nails 3/4" to 21/2" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jambs, moldings, cabinets

F-15XP

21/2" 15 GA. CORDLESS FINISH NAILER





F-LXP

18 GA. 1/4" CROWN, 11/2" CORDLESS FINISH STAPLER





TOOL OVERVIEW

- Drives 15 GA. angled finish nails 11/4" to 21/2" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jambs, moldings, cabinets

TOOL OVERVIEW

- Drives 18 GA. 1/4" crown staples 3/8" to 11/2" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp-up time

APPLICATIONS

Cabinets, soffits, drawer assembly

02 01 2011 10/11101	10			
MODEL NAME ITEM #	F-18XP 10M0001N	F-16XP 10N0001N	F-15XP 10L0001N	F-LXP 10Y0001N
Trigger	Selectable	Selectable	Selectable	Selectable
Technology	FUSION®	FUSION®	FUSION®	FUSION®
Power Type	Cordless	Cordless	Cordless	Cordless
Weight	6.6 lbs (3.0 kg)	6.7 lbs (3.1 kg)	6.8 lbs (3.1 kg)	6.8 lbs (3.1 kg)
Height	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)
Length	10.2" (259 mm)	11.6" (295 mm)	12.6" (320 mm)	10.4" (264 mm)
Width	3.9" (99 mm)	3.9" (99 mm)	5.3" (135 mm)	3.9" (99 mm)
Charge Time	80% in 15 minutes, 100% in 45 minutes			
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCA	ATED ON PAGES 23-25	
Gauge	18	16	15	18
Crown	-	-	-	1/4"
Range	5/8"-21/8"	3/4"-21/2"	11/4"-21/2"	3/8"-11/2"
Capacity	110	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	34° Angled Taped Strip	Straight Glued Strip

13/8" 23 GA. PINNER





TN11L1 2" 23 GA. PINNER



TOOL OVERVIEW

- Drives 23 GA. headless pins 1/2" to 13/8" in length
- NEVERLUBE® oil-free design
- · Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece

APPLICATIONS

Fine woodworking, molding & decorative trim

TOOL OVERVIEW

- Drives 23 GA. straight strip micro pins ½" to 2" in length NEVERLUBE® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece

APPLICATIONS

Fine woodworking, molding & decorative trim

TN11G1P

13/8" 23 GA. PINNER







TOOL OVERVIEW

- Drives 23 GA. headless pins ½" to 1¾" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear & indicates when to reload
- Ultra-narrow nosepiece allows access to tight corners & other hard to reach areas

APPLICATIONS

Fine woodworking, molding & decorative trim

MODEL NAME ITEM #	TN11G1	TN11L1	TN11G1P1
Trigger	Sequential	Sequential	Sequential
Operating Pressure	70-100 psi (4.8-6.9 bar)	70-110 psi (4.8-7.6 bar)	70-100 psi (4.8-6.9 bar)
Air Consumption (60 CPM)	1.1 scfm	1.1 scfm	1.1 scfm
Air Inlet	1/4" NPT	1⁄4" NPT	1⁄4" NPT
Weight	2.41 lbs (1.09 kg)	2.86 lbs (1.3 kg)	2.3 lbs (1.0 kg)
Height	7.8" (198 mm)	9.2" (233 mm)	7.5" (191 mm)
Length	8.57" (218 mm)	8.69" (220 mm)	7.5" (191 mm)
Width	2.6" (66 mm)	2.6" (66 mm)	1.9" (48 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGE 22	
Gauge	23	23	23
Range	1/2"-13/8"	1/2"-2"	1/2"-13/8"
Capacity	100	100	100
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip







18_{ga} brad

TOOL OVERVIEW

- Drives 21 GA. pins 5/8" to 2" in length
- NEVERLUBE® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece
- · Reversible belt hook

APPLICATIONS

Fine woodworking, molding & decorative trim

TOOL OVERVIEW

- Drives 18 GA. headless brad nails ½" to 1" in length
- NEVERLUBE® oil-free design
- Aluminum housing reduces weight & provides superior durability
- Low load indicator allows the user to quickly identify when it's time to reload

APPLICATIONS

Finish & woodworking, cabinets, paneling, casing

BN31M1P

21/8" 18 GA. BRAD NAILER





TOOL OVERVIEW

- Drives 18 GA. brad nails 5%" to 21%" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear & indicates when to reload
- Selectable trigger to switch between contact or sequential firing modes

APPLICATIONS

Finish & trim, woodworking, paneling, casing, molding, chair rail, decorative trim



OUL SPECIFICATION			
MODEL NAME ITEM #	TN21L1	LS1XP 8N0001N	BN31M1P
Trigger	Sequential	Sequential	Selectable
Operating Pressure	70-110 psi (4.8-7.6 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.1 scfm	1.92 scfm	2.4 scfm
Air Inlet	1⁄4" NPT	¼" NPT	1/4" NPT
Weight	3.16 lbs (1.43 kg)	2.9 lbs (1.3 kg)	3.0 lbs (1.4 kg)
Height	9.2" (233 mm)	8.25" (210 mm)	9.75" (248 mm)
Length	8.76" (222 mm)	9" (229 mm)	10.5" (267 mm)
Width	2.6" (66 mm)	2" (51 mm)	2.5" (63.5 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGES 22-2	3
Gauge	21	18	18
Range	5/8"-2"	1/2"-1"	5/8"-21/8"
Capacity	200	100	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip

SLP20XP

15/8" 18 GA. BRAD NAILER



FINISHPRO®25XP

21/8" 18 GA. BRAD NAILER



18_{GA} BRAD

TOOL OVERVIEW

- Drives 18 GA. brad nails 5%" to 15%" in length
- Drives both slight & medium headed brad nails
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface

APPLICATIONS

Finish & trim, cabinets, molding, upholstery, paneling, casing

TOOL OVERVIEW

- Drives 18 GA. brad nails 5/" to 15/" in length
- Drives both slight & medium headed brads
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Finish & woodworking, cabinets, paneling, casing

TN41P1P

21/2" 16 GA. FINISH NAILER



STRAIGHT

TOOL OVERVIEW

- Drives 16 GA. finish nails 11/4" to 21/2" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear, indicates when to reload
- Selectable trigger to switch between contact or sequential firing modes

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jambs, moldings, cabinets



OUL SELUII IUATIUNS					
MODEL NAME ITEM #	SLP20XP 430101N	FINISHPRO®25XP 760102N	TN41P1P		
Trigger	Sequential	Sequential	Selectable		
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.22 scfm		
Air Inlet	1/4" NPT	1/4" NPT	½" NPT 4.6 lbs (2.1 kg)		
Weight	2.3 lbs (1 kg)	2.7 lbs (1.2 kg)			
Height	8.25" (210 mm)	9.9" (251 mm)	11.4" (290 mm)		
Length	9.5" (241 mm)	9.8" (249 mm)	12" (305 mm)		
Width	2" (50.8 mm)	2.2" (56 mm)	4" (102 mm)		
Main Body Material	Aluminum	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs 5 yrs			
FASTENERS		FASTENERS ARE LOCATED ON PAGES 23-2	24		
Gauge	18	18	16		
Range	5/8"-15/8"	5/8"-21/8"	11/4"-21/2"		
Capacity	110	110	110		
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip		

2" 15 GA. ANGLED FINISH NAILER





TN51P1P

21/2" 15 GA. FINISH NAILER



TOOL OVERVIEW

- Drives 15 GA. angled finish nails 1" to 2" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Finish & woodworking, cabinets, paneling, casing

TOOL OVERVIEW

- Drives 15 GA. angled finish nails 1¼" to 2½" in length
- Oil-less design eliminates the need for routine lubrication
- Dry fire lockout reduces tool wear & indicates when to reload
- Selectable trigger to switch between contact or sequential firing modes
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Finish & trim, woodworking, baseboards, casing, door & window jambs, moldings, cabinets

FINISHPRO®42XP

21/2" 15 GA. ANGLED FINISH NAILER





APPLICATIONS

Finish & trim



TOOL OVERVIEW

- Drives 15 GA. 34° finish nails 11/4" to 21/2" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Tool-free depth adjustment for consistent flush or countersunk drives

OUL SPECIFICATION	5			
MODEL NAME ITEM #	FINISHPRO®30XP 9P0002N	TN51P1P	FINISHPRO®42XP 4G0001N	
Trigger	Sequential	Selectable	Sequential	
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	
Air Consumption (60 CPM)	2.16 scfm	3.2 scfm	3.87 scfm	
Air Inlet	1⁄4" NPT	¼" NPT	1⁄4" NPT	
Weight	3.8 lbs (1.73 kg)	4.5 lbs (2.0 kg)	4.7 lbs (2.1 kg)	
Height	9.63" (244.6 mm)	12.25" (311 mm)	11.25" (286 mm)	
Length	12" (305 mm)	13" (330 mm)	13" (330 mm)	
Width	3.25" (82.5 mm)	3.5" (89 mm)	3.5" (89 mm)	
Main Body Material	Magnesium	Aluminum	Magnesium	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENERS		FASTENERS ARE LOCATED ON PAGE 24		
Gauge	15	15	15	
Range	1"-2"	11/4"-21/2"	1¼"-2½"	
Capacity	104	110	104	
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	34° Angled Tape Strip	

SLS20XP

3/16", 1/4", 3%" CROWNS, 11/2" 18/19 GA. FINISH STAPLER



SLS25XP

1/4", 3/8" CROWNS, 11/2" 18 GA. FINISH STAPLER



TOOL OVERVIEW

- Drives 18/19 GA. ³/₁₆", ¹/₄", ³/₈" crown staples 1½" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Ultra-lightweight for ease of use & maneuverability
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Upholstery, paneling, trim, sheathing, siding

TOOL OVERVIEW

- Drives 18 GA. ¼", ¾"
 crown staples 1½" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Ultra-lightweight for ease of use & maneuverability
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Trim, cabinet frame & drawer assembly, sheathing, paneling, underlayment, siding

SKSXP

14", 3%", 16" CROWNS, 11/2" 16/18 GA. FINISH STAPLER



TOOL OVERVIEW

- Drives 16/18 GA. ¼", ¾", ¾6" crown staples 1½" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil spillover onto the work surface
- Long 1" lip fits into tight spots

APPLICATIONS

Finish & woodworking

SLS20XP, SLS25XP & SKSXP ITEM CODE CHART

MODEL	CROWN	ITEM #
SLS20XP-K	1/4"	490101N
SLS20XP-L	1/4"	490103N
SLS20XP-L W/CASE	1/4"	490105N
SLS20XP-L SENCOMATIC	1/4"	490015N
SLS20XP-M	3/8"	490107N
SLS20XP-R	3/16"	490111N
SLS25XP-L	1/4"	820103N
SLS25XP-M	3/8"	820107N
SKSXP-L	1/4"	300120N
SKSXP-M	3/8"	300152N
SKSXP-N	7/16"	300184N

MODEL NAME ITEM #	SLS20XP ITEM # - SEE ABOVE	SLS25XP ITEM # - SEE ABOVE	SKSXP ITEM # - SEE ABOVE	
Trigger	Sequential	Contact	Sequential	
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.16 scfm	
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT	
Weight	2.5 lbs (1.13 kg)	2.67 lbs (1.21 kg)	4.2 lbs (1.9 kg)	
Height	8.5" (216 mm)	9" (229 mm)	9.25" (238 mm)	
Length	12" (305 mm)	12" (305 mm)	12.38" (314 mm)	
Width	2" (50.8 mm)	2" (50.8 mm)	3" (76 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENERS	F	ASTENERS ARE LOCATED ON PAGES 25-2	26	
Gauge	19, 18	18	18, 16	
Crown	3/16", 1/4", 3/8"	1/4", 3/8"	1/4", 3/8", 7/16"	
Range	3/8"-11/2"	3/8"-11/2"	3/4"-11/2"	
Capacity	168	168	145	
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip	

18 GA. 1/4" CROWN, 11/2" FINISH STAPLER





SC1XP SENCLAMP®

 $\frac{7}{16}$ " CROWN, $\frac{9}{16}$ " 25 GA. SENCLAMP® FASTENER



TOOL OVERVIEW

- Drives 18 GA. ¼" crown staples 3/4" to 11/2" in length
- Oil-less design eliminates the need for routine lubrication
- Selectable trigger to switch between contact or sequential firing modes
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Woodworking, cabinets, soffits, drawer assembly

TOOL OVERVIEW

- Drives 25 GA. Senclamp® joint fasteners 5/16" to 9/16" in length
- Senclamp® fasteners pull the joint together when driving ensuring a tight, permanent fit
- · Eliminates milling, doweling, clamping, screwing & other timeconsuming, cost adding operations
- High-carbon steel fastener derives added strength from its special webbed design

APPLICATIONS

Joint fastening in wood

SC2 SENCOR®

1" CROWN, ½" 25 GA. CORRUGATED FASTENER





TOOL OVERVIEW

- Drives 25 GA. Sencor® corrugated
- fasteners ¼" to ½" in length
 Sencor® corrugated fasteners provide twice the joint strength of ordinary fasteners
- Eliminates milling, doweling, clamping, screwing & other timeconsuming, cost adding operations

APPLICATIONS

Joint fastening in wood, crate, pallet, truss & box assembly



MODEL NAME ITEM #	LS61H1P	SC1XP SENCLAMP® 220101N	SC2 SENCOR* 470001N				
Trigger	Selectable	Sequential	Sequential				
Operating Pressure	70-120 psi (4.8-8.3 bar)	80-110 psi (5.5-7.5 bar)	80-110 psi (5.5-7.5 bar)				
Air Consumption (60 CPM)	2.4 scfm	3.8 scfm	3.7 scfm				
Air Inlet	¼" NPT	3%" NPT	3%" NPT				
Weight	3.1 lbs (1.4 kg)	6.3 lbs (2.8 kg)	6.9 lbs (3.1 kg)				
Height	9.5" (241 mm)	9.8" (249 mm)	9.44" (240 mm) 12.5" (318 mm)				
Length	10.25" (260 mm)	12.7" (322 mm)					
Width	2.5" (63.5 mm)	2.5" (63.5 mm)	2" (50.8 mm)				
Main Body Material	Aluminum	Aluminum	Aluminum 5 yrs				
Warranty	5 yrs	5 yrs					
FASTENERS	FASTENERS ARE LOCATED ON PAGES 25, 27						
Gauge	18	25	25				
Crown	1/4"	⁷ / ₁₆ "	1"				
Range	3/8"-11/2"	⁵ / ₁₆ " - ⁹ / ₁₆ "	1/4"-1/2"				
Capacity	110	120	80				
Angle/Collation	Straight Glued/Taped Strip	Straight Glued/Taped Strip	Straight Glued Strip				



HEADLESS STRAIGHT STRIP PINS

FINE WO	ODWOR	(ING, MOL	DING & D	ECORATIV	E TRIM			
Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ08EAAR	
1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	15,500	CZ08EAAN	
1/2"-1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	A109809R	
5/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ10EAAR	
5/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ10EAA	
5/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	15,500	CZ10EAAN	
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ11EAAR	
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ11EAA	
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	15,500	CZ11EAAN	
1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ13EAAR	
1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ13EAA	
11/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ15EAAR	
11/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ15EAA	
13/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ16EAAR	
13/8"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ16EAA	
1½"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ17EAAR	
1½"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ17EAA	
2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	2600	CZ21EAAR	
2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	10,000	CZ21EAA	



TNIIGIP
TNIILI
TNIIGI



MEDIUM STRAIGHT STRIP PINS

Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX10EAA	
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX13EAAR	
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX13EAA	
13/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX16EAAR	
13/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX16EAA	
15/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX18EAAR	
15/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX18EAA	
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	2000	ZX21EAAR	
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	ZX21EAA	
					•			TN21L1





STRAIGHT STRIP BRAD NAILS


CABINET	S, DECOF	RATIVE TRI	M, PICTU	RE FRAME	S & MOLDING			
Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX10EAA	00000
5/8"-11/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1200	A209809R	00000
3/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX11EAAR	00000
3/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX11EAA	
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX13EAAR	
1"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX13EAA	
11/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX15EAAR	00000
11/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX15EAA	
11/2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX17EAAR	
11/2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX17EAA	00000
15/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX18EAA	00000
13/4"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX19EAA	
1-2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1200	A209909R	
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX21EAAR	
2"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX21EAAN	
21/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	1000	AX22EAAR	
21/8"	Galv	Medium	Chisel	Plain	Straight Glued Strip	5000	AX22EAAN	
								FINISHPRO°25XP SLP20XP FINISHPRO°18BMG FINISHPRO°18MG BN31M1P F-18XP



12

HEADLESS & SLIGHT HEAD BRAD NAILS

Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
⁷ / ₁₆ "	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ07EAA	
1/2"	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ08EAA	
3/4"	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ11EAA	
1"	Galv	Headless	Chisel	Plain	Straight Glued Strip	5000	AZ13EAA	
5/8"	Galv	Slight	Chisel	Plain	Straight Glued Strip	5000	AY10EAA	
3/4"	Galv	Slight	Chisel	Plain	Straight Glued Strip	5000	AY11EAA	
1"	Galv	Slight	Chisel	Plain	Straight Glued Strip	5000	AY13EAA	
								FINISHPRO*25XP SLP20XP LS1XP F-18X





STRAIGHT STRIP FINISH NAILS

Length	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
3/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001000R	
3/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000	M001000	
1"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001001R	
1"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001001	
11⁄4″	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001002R	• •
11/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001002	• •
11/2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001003R	• •
1½"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001003	• •
13/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001004R	• •
13/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001004	• •
2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001005R	• •
2"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001005	• •
21/4"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001006R	• •
2½"	Galv	T-head	Chisel	Plain	Straight Glued Strip	2000*	M001007	• •
2½"	Galv	T-head	Chisel	Plain	Straight Glued Strip	1000	M001007R	• •
lastic Tu	b						. '	TN41P1P F-16XP






ANGLED STRIP FINISH NAILS

ength	Finish	Head	Point	Coating	Collation	Count	Item Code	Compatible With
1"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA13EPBR	
1"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA13EPBN	
11/4"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA15EPBR	
11/4"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA15EPBN	
1½"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA17EPBR	
11/2"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA17EPBN	
13/4"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA19EPBR	0000
13/4"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA19EPBN	
2"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA21EPBR	
2"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA21EPBN	0000
21/4"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA23EPBN	• • •
2½"	Bright	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA25EPBR	• • •
2½"	Bright	Brad	Chisel	Sencote	34° Angled Tape Strip	3000	DA25EPB	• • •
1"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA13EABR	• •
11/4"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA15EABR	0000
11/4"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA15EABN	0000
11/2"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA17EABR	0000
1½"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA17EABN	0000
13/4"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA19EABR	0000
13/4"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA19EABN	0000
2"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA21EABR	0000
2"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	4000	DA21EABN	0000
2½"	Galv	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA25EABR	• • •
2½"	Galv	Brad	Chisel	Sencote	34° Angled Tape Strip	3000	DA25EAB	• • •
11/4"	Hardened*	Brad	Diamond	Plain	34° Angled Tape Strip	4000	DA15AIA	0000
11/2"	Hardened*	Brad	Diamond	Plain	34° Angled Tape Strip	4000	DA17AIA	0000
13/4"	Hardened*	Brad	Diamond	Plain	34° Angled Tape Strip	4000	DA19AIA	0000
2"	Stainless 304	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA21EGBR	0000
2½"	Stainless 304	Brad	Chisel	Plain	34° Angled Tape Strip	1000	DA25EGBR	• • •
Hardene	d, heat treated & g	alvanize	ed for steel	stud & trir			'	7 2 4 2
	_							FINISHPRO*42XP TN51P1P FINISHPRO*30XP F-15XP
								고 를 쓸 풀
								~ ~
								30


^{*}Hardened, heat treated & galvanized for steel stud & trim applications





1/4" CROWN FINISH STAPLES


CABINETS, I	CABINETS, DRAWERS, SOFFITS, LATTICE, CASEBACKS									
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With			
3/4"	Galv	Chisel	Sencote	Glued	10,000	K11BAB				
7/8"	Galv	Chisel	Sencote	Glued	5000	K12BAB				
1"	Galv	Chisel	Sencote	Glued	5000	K13BABN				
							SLS20XP-K			





3/16" CROWN FINISH STAPLES


Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Chisel	Sencote	Glued	5000	R10BAB	
3/4"	Galv	Chisel	Sencote	Glued	5000	R11BAB	
1"	Galv	Chisel	Sencote	Glued	5000	R13BAB	
			1	1			SLS20XP






1/4" CROWN FINISH STAPLES

ength	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/4"	Bright	Chisel	Sencote	Glued	5000	L11BRB	0000
1"	Bright	Chisel	Sencote	Glued	5000	L13BRBN	0000
11/8"	Bright	Chisel	Sencote	Glued	5000	L14BRB	
11/4"	Bright	Chisel	Sencote	Glued	5000	L15BRB	0000
3/8"	Galv	Chisel	Sencote	Glued	10,000	L06BAB	
⁷ / ₁₆ "	Galv	Chisel	Sencote	Glued	24,000	L07BABP	
1/2"	Galv	Chisel	Sencote	Glued	10,000	L08BAB	
/2"-11/2"	Galv	Chisel	Plain	Glued	1000	A809909R	0000
5/8"	Galv	Chisel	Plain	Glued	1000	L10BABR	
5/8"	Galv	Chisel	Sencote	Glued	5000	L10BABN	
5/8"	Galv	Cross Cut	Sencote	Glued	5000	L10HABN	0000
3/4"	Galv	Chisel	Plain	Glued	1000	L11BABR	0000
3/4"	Galv	Chisel	Sencote	Glued	5000	L11BAB	0000
3/4"	Galv	Cross Cut	Sencote	Glued	5000	L11HBB	0000
3/4"	Galv	Cross Cut	Sencote	Glued	5000	L11HAB	0000
7/8"	Galv	Chisel	Sencote	Glued	5000	L12BAB	0000
1"	Galv	Chisel	Plain	Glued	1000	L13BABR	0000
1"	Galv	Chisel	Sencote	Glued	5000	L13BABN	0000
11/8"	Galv	Chisel	Sencote	Glued	5000	L14BAB	0000
11/4"	Galv	Chisel	Plain	Glued	1000	L15BABR	0000
11/4"	Galv	Chisel	Sencote	Glued	5000	L15BAB	0000
1½"	Galv	Chisel	Plain	Glued	1000	L17BABR	0000
11/2"	Galv	Chisel	Sencote	Glued	5000	L17BAB	0000
3/4"	Stainless Steel 304	Chisel	Plain	Glued	1000	L11BGBR	0000
3/4"	Stainless Steel 304	Chisel	Plain	Glued	5000	L11BGA	0000
11/8"	Stainless Steel 304	Chisel	Plain	Glued	1000	L14BGBR	0000
11/8"	Stainless Steel 304	Chisel	Plain	Glued	5000	L14BGA	0000
ainless	304 high tensile, ² Galv	anized high to	ensile				SLS150MG SKSXP-L SLS25XP-L SLS20XP-I F-LXP








3/16" CROWN FINISH STAPLES


CABINETS, CASEBACKS, DRAWERS, UPHOLSTERY, SOFFITS, UNDERLAYMENT, LATTICE & SHEATHING								
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With	
5/8"	Bright	Chisel	Sencote	Glued	5000	M10BRBN	• •	
3/4"	Bright	Chisel	Sencote	Glued	5000	M11BRBN		
1"	Bright	Chisel	Sencote	Glued	5000	M13BRB	• • •	
3/8"	Galv	Chisel	Sencote	Glued	10,000	M06BABN		
1/2"	Galv	Chisel	Sencote	Glued	10,000	M08BAB		
5/8"	Galv	Chisel	Sencote	Glued	5000	M10BABN		
3/4"	Galv	Chisel	Sencote	Glued	5000	M11BABN		
7/8"	Galv	Chisel	Sencote	Glued	5000	M12BAB		
1"	Galv	Chisel	Sencote	Glued	5000	M13BAB		
11⁄4″	Galv	Chisel	Sencote	Glued	10,000	M15BAB		
1½"	Galv	Chisel	Sencote	Glued	10,000	M17BAB		
							SKSXP-M SLS25XP-M SLS20XP-M	





%6" CROWN HEAVY WIRE STAPLES

CABINETS, CASEBACKS, DRAWERS, UPHOLSTERY, SOFFITS, UNDERLAYMENT, LATTICE & SHEATHING							IFATHING
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
11/8"	Bright	Chisel	Sencote	Taped	10.000	N14BRB	Companior With
11/4"	Bright	Chisel	Sencote	Taped	10,000	N15BRB	
13/8"	Bright	Chisel	Sencote	Taped	10,000	N16BRB	
1½"	Bright	Chisel	Sencote	Taped	10,000	N17BRB	
15/8"	Bright	Chisel	Sencote	Taped	10,000	N18BRB	
13/4"	Bright	Chisel	Sencote	Taped	10,000	N19BRB	
2"	Bright	Chisel	Sencote	Taped	10,000	N21BRB	
1/2"	Galv	Chisel	Sencote	Glued	5000	N08BABN	
3/4"	Galv	Chisel	Sencote	Glued	5000	N11BAB	
7/4 7/8	Galv	Chisel	Sencote	Glued	5000	N12BABN	
78 7/8	Galv	Diverg	Sencote	Glued	5000	N12FABN	
1"	Galv	Chisel	Sencote	Glued	5000	N13BAB	
1"	Galv	Diverg	Sencote	Glued	5000	N13FAB	
11/8"	Galv	Chisel	Sencote	Taped	10,000	N14BAB	
11/4"	Galv	Chisel	Sencote	Taped	10,000	N15BAB	
13/8"	Galv	Chisel	Sencote	Taped	10,000	N16BAB	
1½"	Galv	Chisel	Sencote	Taped	10,000	N17BAB	
15/8"	Galv	Chisel	Sencote	Taped	10,000	N18BAB	
13/4"	Galv	Chisel	Sencote	Taped	10,000	N19BAB	
2"	Galv	Chisel	Sencote	Taped	10,000	N21BAB	
1/2"	Galv*	Chisel	Sencote	Glued	5000	NO8BBBN	
1/2"	Galv*	Diverg	Sencote	Glued	5000	NO8FBB	
72 5/8"	Galv*	Chisel	Sencote	Glued	5000	N10BAB	
78 3/4"	Galv*	Diverg	Sencote	Glued	5000	N11FBB	
1½"	Stainless 304	Chisel	Sencote	Glued	3000	N17BGB	
13/4"	Stainless 304	Chisel	Sencote	Glued	3000	N19BGBN	
2"	Stainless 304	Chisel	Sencote	Glued	3000	N21BGBN	
	Stainless 304	Criisei	Sencote	J Glued	3000	INZIBGBIN	



^{*}Galvanized high-tensile steel



SENCLAMP® 7/16" CROWN JOINT FASTENER

BUTT & MITER JOINTS							
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/16"	Bright	Chisel	Plain	Glued	3000	Y05BFA	
⁷ / ₁₆ "	Bright	Chisel	Plain	Glued	3000	Y07BFA	
9/16"	Bright	Chisel	Plain	Glued	3000	Y09BFAN	
							SCIXP





SENCOR® 1" CROWN CORRUGATED FASTENER

BUTT & MITER JOINTS								
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With	
1/4"	Bright	Sharp Chisel	Plain	Glued	8000	X04NRA		
3/8"	Bright	Sharp Chisel	Plain	Glued	5000	X06NRA		
1/2"	Bright	Sharp Chisel	Plain	Glued	4000	X08NRA		
					•		SC	





FRAMING, SHEATHING & SUBFLOORS

NAILING THE RIGHT BALANCE OF SIZE, WEIGHT AND POWER

We offer a large selection of pneumatic nailers for a wide variety of applications.

APPLICATIONS

Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets.

KEY FEATURES

- Low profile designs allow for easy access between studs and joists
- Highly efficient internal design for increased durability
- Dry fire lock out prevents dry firing and signals when it's time to reload
- Claw-like safety for precise toe-nailing

Experience FUSION® award-winning cordless convenience in all-day, everyday framing tools.

APPLICATIONS

Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets.

KEY FEATURES

- FUSION® cordless air-power technology
- No hose, compressor or fuel cell
- Pneumatic-like response with no ramp up time
- Jam Reduction Intelligence for fewer nail jams
- · Dry fire lockout
- Aggressive toenail safety

FRAMING, SHEATHING & SUBFLOORS

.

30'

31/2" 21° CORDLESS PLASTIC COLLATED FRAMING NAILER



TOOL OVERVIEW

- Drives 30° paper tape strip nails 2" to 3½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp up time
- Jam reduction intelligence for fewer nail jams

APPLICATIONS

Framing, panelized construction, truss building, subflooring, sheathing, decking, siding, fencing, pallets & crate assembly



TOOL OVERVIEW

F-35FRHXP

- Drives 21° plastic collated framing nails 2" to 3½" in length
- Fusion cordless air-power technology
- No hose, compressor or fuel cell needed
- Pneumatic-like response with no ramp up time
- Jam reduction intelligence for fewer nail jams

APPLICATIONS

Framing, panelized construction, truss building, subflooring, sheathing, decking, siding, fencing, pallets & crate assembly



EXTENDED LENGTH MAGAZINES - SOLD SEPARATELY

FOR	TYPE	ITEM #
F-35XP	2 Nail Strip Magazine	GA0767
F-35FRHXP	2 Nail Strip Magazine	GA0778

MODEL NAME ITEM #	F-35XP 10G0002N	F-35FRHXP 10H0002N		
Trigger	Selectable	Selectable		
Technology	FUSION®	FUSION®		
Power Type	Cordless	Cordless		
Weight	11.37 lbs (5.16 kg)	11.38 lbs (5.17 kg)		
Height	14.4" (366 mm)	14.4" (366 mm)		
Length	14.0" (356 mm)	14.6" (371 mm)		
Width	5.5" (140 mm)	4.7" (119 mm)		
Charge Time	50% in less than 20 minutes, 100% in less than 60 minutes	50% in less than 20 minutes, 100% in less than 60 minutes		
Warranty	5 yrs	5 yrs		
FASTENERS	FASTENERS ARE LOC	ATED ON PAGES 38-41		
Range	2"-3½"	2"-3½"		
Diameter	.113"148"	.113"131"		
Capacity	60	35		
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip		

FN91T1

31/2" 30° PAPER TAPE FRAMING NAILER



TOOL OVERVIEW

- Drives 30° paper tape framing nails 2" to 3½" in length
- Best in class tool power & durability
- Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly

FN81T1

31/2" 21° FULL ROUND HEAD FRAMING NAILER



TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3½" in length
- Best in class tool power & durability Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly



MODEL NAME ITEM #	FN91T1	FN81T1
Trigger	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	6.7 scfm	6.7 scfm
Air Inlet	3%" NPT	3/8" NPT
Weight	8.39 lbs (3.8 kg)	8.75 lbs (3.9 kgs)
Height	14.13" (358 mm)	14.13" (358 mm)
Length	17.25" (438 mm)	20.75" (527 mm)
Width	4.88" (123 mm)	4.88" (123 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENERS	FASTENERS ARE LOCA	ATED ON PAGES 38-41
Range	2" - 3½"	2" - 3½"
Diameter	.113"135"	.113"148"
Capacity	80	70
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip





31/2" 30° PAPER TAPE FRAMING NAILER

FRAMEPRO®701XP



TOOL OVERVIEW

- Drives 30° paper tape strip nails 2" to 31/4" in length
- Low profile design fits easily between studs & joists
- · Effective internal design uses less air which means less wear & tear on the compressor
- · Tool-free depth of drive adjustment

APPLICATIONS

Framing, sheathing, subflooring, crate, pallet & truss assembly

TOOL OVERVIEW

- Drives 30° paper taped framing nails 2" to 3½" in length
- Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- Dry fire lockout
- · Quick & easy rear two-step loading

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly

FRAMEPRO®751XP

31/2" 30° PAPER TAPE FRAMING NAILER





MAGAZINE RETROFIT KITS - SOLD SEPARATELY

	FOR	TYPE	ITEM #
	FramePro®701XP	2 Nail Strip Magazine	YJ0055
	FramePro®701XP	Double Length Magazine	YJ0043
_	FramePro®751XP	4" Nail Feed System	YJ0042

TOOL OVERVIEW

- Drives 30° paper taped framing nails 2" to 3½" in length
 Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- · Dry fire lockout
- · Quick & easy rear two-step loading

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly

OOL OF LOW IOATION			
MODEL NAME ITEM #	FRAMEPRO®325XP 4Z0101N	FRAMEPRO*701XP 2H0133N	FRAMEPRO®751XP 2J0103N
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	³⁄8″ NPT	³%″ NPT	³%″ NPT
Weight	7.9 lbs (3.58 kg)	8 lbs (3.62 kg)	8.4 lbs (3.8 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	15.13" (384 mm)	15.13" (384 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	F	ASTENERS ARE LOCATED ON PAGES 38-4	40
Range	2"-31/4"	2"-3½"	2"-3½"
Diameter	.113"148"	.113"148"	.113"148"
Capacity	83	70	70
Angle/Collation	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip

FRAMEPRO®702XP

31/2" 21° FULL ROUND HEAD FRAMING NAILER



21°

TOOL OVERVIEW

FRAMING, SHEATHING & SUBFLOORS

- Drives 21° plastic collated framing nails 2" to 31/4" in length
- Low profile design fits easily between studs & joists
- Effective internal design uses less air which means less wear & tear on the compressor
- Tool-free adjustable depth of drive

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, siding, fencing, pallet & crate assembly



TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3½" in length
- Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- Dry fire lockout
- Quick & easy rear two-step loading

APPLICATIONS

Framing, truss building, subflooring, sheathing, decking, wood to concrete block, siding, fencing, pallet & crate assembly

21°

FRAMEPRO®752XP

31/2" 21° FULL ROUND HEAD FRAMING NAILER





TOOL OVERVIEW

- Drives 16 penny common nails & 21° plastic collated framing nails 2" to 3½" in length
- Tool-free depth of drive adjustment
- Aggressive claw-like safety for accurate & precise toenailing
- In-line magazine for improved line of sight
- Dry fire lockout

APPLICATIONS Framing, sheathing, subflooring, crate, pallet & truss assembly



MODEL NAME ITEM #	FRAMEPRO*325FRHXP 4H0101N	FRAMEPRO*702XP 2K0103N	FRAMEPRO*752XP 2F0103N
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	3⁄8" NPT	³⁄8″ NPT	³⁄₀″ NPT
Weight	7.9 lbs (3.58 kg)	8.4 lbs (3.8 kg)	8.7 lbs (3.97 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	20" (508 mm)	20" (508 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGE 41	
Range	2"-31/4"	2"-3½"	2"-3½"
Diameter	.113"148"	.113"148"	.120"162"
Capacity	64	60	60
Angle/Collation	20-21° Angled Plastic Strip	20-21° Angled Plastic Strip	20-21° Angled Plastic Strip





SCN65XP 3½" 15° COIL NAILER



15°

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2" to 23/4" in length
- High capacity magazine holds up to 275 fasteners
- Tool-free depth adjustment for consistent flush or countersunk drives
- Clear magazine door makes it easy to see when you need to reload

APPLICATIONS

Framing, sheathing, decking, subflooring, crate, pallet & box assembly

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2" to 31/2" in length
- Highest power-to-weight ratio in its class
- High capacity magazine holds up to 275 fasteners
- NOTE: Item # 540101N = Flat Safety Item # 540104N = Toenail Safety

APPLICATIONS

Sheathing, decking, subflooring, exterior decks, pallet construction, pallet repair, crate & box assembly

PC1195

31/2" BULK NAILER

A20

7" BULK NAILER





TOOL OVERVIEW

- Drives nails 2" to $3\frac{1}{2}$ " in length
- Magnetic tip keeps the nail in place for safe, accurate placement
- Balanced 1 lb lightweight aluminum body

APPLICATIONS

Installing metal framing hardware, anchors & straps

TOOL OVERVIEW

- Drives nails 2" to 7" in length (5d to 70d)
- Balanced 2.4 lbs lightweight aluminum body
- Soft rubber palm pad for comfortable grip
- Magnetic tip keeps the nail in place

APPLICATIONS

Installing metal framing hardware, anchors & straps

OUL SPECIFICATION	10				
MODEL NAME ITEM #	SCN60XP 520101N	SCN65XP 540101N, 540104N	PC1195	A20 PC0781	
Trigger	Contact	Contact	-	_	
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	60-110 psi (4-7.6 bar)	50-125 psi (3.5-8.4 bar)	
Air Consumption (60 CPM)	8.29 scfm	9.54 scfm	2-4 scfm	2-4 scfm	
Air Inlet	3/8" NPT	3%" NPT	1/4" NPT	3%"NPT	
Weight	7.5 lbs (3.4 kg)	8 lbs (3.6 kg)	1 lb (.45 kg)	2.4 lbs (1.1 kg)	
Height	12.38" (314 mm)	14.1" (359 mm)	4" (101 mm)	5.8" (122 mm)	
Length	12.88" (327 mm)	12.88" (327 mm)	2.75" (70 mm)	4" (101 mm)	
Width	Width 5.38" (137 mm)	5.38" (137 mm)	2" (55.6 mm)	3.25" (83 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	1 yr	1 yr	
FASTENERS	FASTENERS ARE LOCATED ON PAGES 42-43				
Range	2"-23/4"	2"-3½"	Bulk nails from 2"-3½"	Bulk nails from 2"-3½" up to 7" with optional guide tips	
Diameter	.099"113"	.099"131"	_	.113"148"	
Capacity	250-275	225-275	1	1	
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	_	_	

FRAMING, SHEATHING & SUBFLOORS

JN91H2

11/2" METAL CONNECTOR NAILER WITH EXTENDED MAGAZINE







TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 1½" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Single strip, allows for increased maneuverability in tight spaces
- Innovative nosepiece design
- Dry fire lockout
- Rugged, rotatable belt hook

JN91P1

21/2" METAL CONNECTOR NAILER

APPLICATIONS

Joist hangers, anchors, straps, metal framing

TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 11/2" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Double length magazine, provides less downtime & higher production rates
- Innovative nosepiece design
- Dry fire lockout
- Rugged, rotatable belt hook

JN91P2

21/2" METAL CONNECTOR NAILER WITH EXTENDED MAGAZINE









TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 1½" to 2½" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Single strip, allows for increased maneuverability in tight spaces
- Innovative nosepiece design
- Tool-free depth of drive

APPLICATIONS

Joist hangers, anchors, straps, metal framing

TOOL OVERVIEW

- Drives 34° paper tape metal connector nails 1½" to 2½" in length
- Best-in-class power, designed to consistently drive through engineered lumber
- Double length magazine, provides less downtime & higher production rates
- Innovative nosepiece design
- Tool-free depth of drive

APPLICATIONS

APPLICATIONS

Joist hangers, anchors,

straps, metal framing

Joist hangers, anchors, straps, metal framing

MODEL NAME ITEM #	JN91H1	JN91H2	JN91P1	JN91P2		
Trigger	Sequential	Sequential	Sequential	Sequential		
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8 - 8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8 - 8.3 bar)		
Air Consumption (60 CPM)	4.4 scfm	4.4 scfm	6.4 scfm	6.4 scfm		
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT	1/4" NPT		
Weight	5.48 lbs (2.48 kg)	5.8 lbs (2.63 kg)	7.53 lbs (3.41 kg)	7.92 lbs (3.59 kg)		
Height	12.5" (317 mm)	12.5" (317 mm)	14.38" (365 mm)	14.38" (365 mm)		
Length	11.13" (282 mm)	17.86" (453 mm)	14" (355 mm)	19" (482 mm)		
Width	4.38" (111 mm)	4.88" (123 mm)	5.25" (133 mm)	6.13" (155 mm)		
Main Body Material	Magnesium	Magnesium	Magnesium	Magnesium		
Warranty	5 yrs	5 yrs	5 yrs	5 yrs		
FASTENERS	FASTENERS ARE LOCATED ON PAGE 44					
Range	1½"	1½"	1½"-2½"	1½"-2½"		
Diameter	.131"148"	.131"148"	.131"162"	.131"162"		
Capacity	30	55	35	55		
Angle/Collation	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip		



TOOL OVERVIEW

- Drives concrete & steel pins ½" to 1½" in length
- Works with conventional air compressors, hoses & fittings
- 10 times faster than powderactuated systems
- Narrow nose for precise nail placement
- Cap exhaust directs exhaust downward away from the operator

APPLICATIONS

Drywall track fastening, wood furring, hat channel, ceiling grid to concrete, concrete block & steel

MAGNETIC WASHER NOSEPIECE ATTACHMENT FOR PLASTER, STUCCO & BUILDING WRAP - SOLD SEPARATELY

FOR	RANGE	ITEM #
SCP40XP	11⁄4″	NPC035



GALVANIZED METAL WASHER FOR .109" DIAMETER CONCRETE PINS - SOLD SEPARATELY

FOR	DIAMETER/ BOX COUNT	ITEM#
SCP40XP	11/4"/1000	SWM125B



PS15XP

16 GA. 1" WIDE CROWN, 11/2" CONSTRUCTION STAPLER





PS20XP

16 GA. 1" WIDE CROWN, 2" CONSTRUCTION STAPLER





TOOL OVERVIEW

- Drives 16 GA. 1" crown staples 5%" to 1½" in length
- Quickclear latch to easily clear jams or misfeeds
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance
- Robust firing valve makes the tool faster, more powerful & easier to maintain

Angle/Collation

APPLICATIONS

Straight Plastic Collated Strip

Asphalt & fiberglass shingles, roofing felt, wire lathe, foam insulation board

TOOL OVERVIEW

- Drives 16 GA. 1" crown staples %" to 2" in length
- Quick clear latch to easily clear jams or misfeeds
- Tool free adjustable depth of drive
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance
- Adjustable belt hook

Taped & taped glued

APPLICATIONS

Wire lathe, sheathing, foam insulation board, corrugated cart to skid

Straight Glued/Taped Strip

OOL SPECIFICATIONS			
MODEL NAME ITEM #	SCP40XP 7J0009N	PS15XP 9T0001N	PS20XP 9W0001N
Trigger	Sequential	Contact	Contact
Operating Pressure	80-120 psi (5.5-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	3.18 scfm	3.45 scfm
Air Inlet	3⁄8" NPT	3%" NPT	3%" NPT
Weight	7.1 lbs (3.2 kg)	5.5 lbs (2.5 kg)	5.5 lbs (2.5 kg)
Height	12.22" (310 mm)	9" (229 mm)	10" (254 mm)
Length	18.2" (462 mm)	15.25" (387 mm)	15.25" (387 mm)
Width	4.5" (114.4 mm)	5.5 lbs (2.5 kg)	3.5" (89 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGES 43-44	ļ
Diameter/Crown	.109"/.118" Diameters	1" Crown	1" Crown
Range	1/2"-11/2"	5/8"-11/2"	7/8"-2"
Capacity	42	160	160



NS20BXP

16 GA. 7/6" CROWN, 2" CONSTRUCTION STAPLER



TOOL OVERVIEW

- Drives 16 & 17GA. 7/6" crown staples 1" to 2" in length
- 15% more powerful than all other construction staplers in its class
- 14 staple per second multidirectional stiching
- Can be used for vinyl siding installation (item #HC0788 required, sold separately)

APPLICATIONS

Sheathing, furniture framing, crate & box assembly, subflooring, pallets, roof decking, fascia, cedar shingles

TOOL OVERVIEW

- Drives 16 & 17 GA. 7/16" crown staples 1" to 2" in length
- 20% more powerful than the standard NS20XP for the most demanding applications
- 14 staple per second multidirectional stiching
- Can be used for vinyl siding installation (item #HC0788 required, sold separately)

APPLICATIONS

Sheathing, furniture framing, crate & box assembly, subflooring, pallets, roof decking, fascia, cedar shingles

SNS41

16 GA. 7/6" CROWN, 2" CONSTRUCTION STAPLER





TOOL OVERVIEW

- Drives 16 & 17 GA. 7/6" crown staples 1" to 2" in length
- 14 staple per second multidirectional stiching
- Quick clear latch to easily clear jams or misfeeds
- Adjustable depth of drive for precise flush or countersunk drives

APPLICATIONS

Sheathing, subflooring, crate & box assembly, furring, fascia, soffits, ridge beam assembly



	_		
MODEL NAME ITEM #	NS20XP 9X0001N	NS20BXP 9Y0001N	SNS41 3L0003N
Trigger	Contact	Contact	Contact
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	80-120 psi (5.5-8.3 bar)
Air Consumption (60 CPM)	3.5 scfm	3.98 scfm	5.4 scfm
Air Inlet	³⁄8″ NPT	³⁄8″ NPT	3/8" NPT
Weight	5.1 lbs (2.3 kg)	5.8 lbs (2.6 kg)	4.6 lbs (2.1 kg)
Height	11" (279 mm)	11" (279 mm)	10.75" (273 mm)
Length	15" (381 mm)	15" (381 mm)	15" (381 mm)
Width	3.5" (89 mm)	4" (102 mm)	3.4" (86 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGE 45	
Gauge	16	16	16
Crown	7/16"	⁷ / ₁₆ "	7/16"
Range	1"-2"	1"-2"	1"-2"
Capacity	160	160	160
Angle/Collation	Straight Glued/Taped Strip	Straight Glued/Taped Strip	Straight Glued/Taped Strip







16_{GA}

TOOL OVERVIEW

- Drives 16 GA. 7/16" crown staples 1" to 2" in length
- Fast-up to 15 staples per second
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

On-site & manufactured housing, roof & floor decking, sheathing, subflooring, fascia & soffits, lathing, fencing & cedar shingles, furniture frames, boxes, crates, pallets & pallet repair

TOOL OVERVIEW

- Drives 16 GA. $\frac{7}{6}$ " crown staples $\frac{1}{4}$ " to 2" in length
- Fast-up to 15 staples per second
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk drives

APPLICATIONS

Framing, sheathing, subflooring, crate & box assembly, pallets & pallet repair

SQS55XP

15 GA. 1/16" CROWN, 21/2" CONSTRUCTION STAPLER





TOOL OVERVIEW

- Drives 15 GA. 7/16" crown staples 11/4" to 21/2" in length
- 15 staple per second multidirectional stiching
- Quick clear latch to easily clear jams or misfeeds

APPLICATIONS

Framing, sheathing, subflooring, crate & box assembly, pallet & pallet repair




OUL SPECIFICATION	15		
MODEL NAME ITEM #	SNS45XP 580101N	SNS50XP 750101N	SQS55XP 660101N
Trigger	Contact	Contact	Contact
Operating Pressure	80-120 psi (5.5 - 8.3 bar)	80-120 psi (5.5 - 8.3 bar)	80-120 psi (5.5-8.3 bar)
Air Consumption (60 CPM)	5.52 scfm	6.54 scfm	6.54 scfm
Air Inlet	³⁄8″ NPT	3/8" NPT	3/8" NPT
Weight	5.1 lbs (2.3 kg)	5.9 lbs (2.7 kg)	5.9 lbs (2.7 kg)
Height	11" (279 mm)	12" (305 mm)	12" (305 mm)
Length	14" (356 mm)	14.38" (365 mm)	14.38" (365 mm)
Width	3.5" (89 mm)	3.6" (92 mm)	3.6" (92 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGE 45	
Gauge	16	16	15
Crown	7/16"	⁷ / ₁₆ "	7/16"
Range	1"-2"	11⁄4"-2"	1¼"-2½"
Capacity	160	160	130
Angle/Collation	Straight Glued/Taped Strip	Straight Glued/Taped Strip	Straight Glued/Taped Strip

30°

PROHEAD® SMOOTH SHANK PAPER TAPE COLLATED NAILS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Co	ompa	atible	e Wi	th
2"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GC21APBX					
23/8"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GC24APBX					
2½"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GC25APBX					(
3"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	1000	H527APBXNR					(
3"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	HC27APBX					(
31/4"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	HC28APBX					(
2½"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2000	KC25APBXN					(
3"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	1000	K527APBXNR					(
3"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC27APBX					(
3¼"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	1000	K528APBXNR					(
31/4"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC28APBX					(
3½"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC29APBX					(
4"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KC31APBX*					(
3½"	.135"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	LC29APBX					(
23/8"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	GC24ASBX					(
3"	.120"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	HC27ASBX					(
3"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	K527ASBXNR					(
3"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KC27ASBX					(
31/4"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	K528ASBXNR					(
31/4"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KC28ASBX					(
3½"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KC29ASBX					(
ramePr	o®751XP car	n drive 4″ na	ails when fi	tted with t	he YJ0042 kit			F-35XP	FN91T1	FINISHPRO®325XP	FINISHPRO®701XP	








PROHEAD® RING SHANK PAPER TAPE COLLATED NAILS

							,					
FRAMIN	IG, SHEATH	IING, SUBFL	OOR, DECI	KS, TRUSS	ES & PALLETS							
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Co	omp	atibl	e Wi	ith
2"	.113"	Bright	Diamond	Plain	30° Paper Tape Strip	2500	GE21APAX					
23/8"	.113"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	GE24APBX					
3"	.120"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	HE27APBXN					
31/4"	.131"	Bright	Diamond	Sencote	30° Paper Tape Strip	2500	KE28APBXN					
2"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	GE21ASBX					
23/8"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	G624ASBXNR					
23/8"	.113"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	GE24ASBX					
3"	.120"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	1000	H627ASBXNR					
3"	.120"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	HE27ASBX					
3"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KE27ASBXN					
31/4"	.131"	Hot Dip	Diamond	Sencote	30° Paper Tape Strip	2500	KE28ASBXN					
								Ţ	Ŧ	₽	₽	₽
								F-35XP	FN91T1	FINISHPRO®325XP	FINISHPRO®701XP	FINISHPRO®751XP
								0	_	ヌ	ヌ	묫
										23	0,7	0,7
										25X	2	Σ
										Ŧ	Þ	P&



51XP & 751XP-SL



SENCO PROHEAD® PAPER TAPE COLLATED NAILS:

OFFSET FULL ROUND HEAD DESIGN

ProHead® nails are recognized in ESR1539 to meet the requirements of a full round head/concentric nail

• SUPERIOR HOLDING POWER

 $\label{proHead} \mbox{ ProHead} \mbox{ nails are uniquely engineered with a robust head geometry that beats competitors in pull-through testing}$

• FEWER PARTIAL-DRIVES AND PULL-OUTS

ProHead nails feature Sencote®, a proprietary coating that acts as both a lubricant and an adhesive, resulting in more fully completed drives and one of the highest withdrawal values in the industry

SUPERIOR STRIP INTEGRITY

SENCO's clean wire manufacturing process yields nail strips that have superior tape adhesion for less broken collation

MORE NAILS PER STRIP

Close shank to shank collation allows up to 10% more nails than other $30^{\rm o}$ -34 $^{\rm o}$ paper tape nails


• PROUDLY MANUFACTURED IN CINCINNATI, OHIO

Every box is uniquely stamped at time of production for Quality Assurance

30

SMOOTH SHANK PAPER TAPE COLLATED NAILS

FRAMI	NG, SHEAT	HING, SUBFLO	OOR, DEC	KS, TRUS	SES & PALLETS			
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
21/4"	.113"	Bt. Hardened	Diamond	Plain	30° Paper Tape Strip	1000	GC23AHAK	
3"	.131"	Stainless 304	Diamond	Sencote	30° Paper Tape Strip	1000	KC27AGBK	
31/4"	.131"	Stainless 304	Diamond	Sencote	30° Paper Tape Strip	1000	KC28AGBK	
								FINISHPRO"751XP & 751XP-SL FINISHPRO"701XP FINISHPRO"325XP FN91T1 F-35XP



30

RING SHANK PAPER TAPE COLLATED NAILS

FRAMIN	NG, SHEATI	HING, SUBFL	OOR, DEC	KS, TRUSS	ES & PALLETS							
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Co	mpa	atible	e Wi	ith
23/8"	.113"	Stainless 304	Diamond	Sencote	30° Paper Tape Strip	1000	GE24AGBK					
								F-35XP	FN91T1	FINISHPRO®325XP	FINISHPRO®701XP	FINISHPRO®751XP & 751XP-SL



SCREW SHANK PAPER TAPE COLLATED NAILS


FRAMIN	NG, SHEATH	IING, SUBFLO	OOR, DECK	S, TRUSSE	S & PALLETS							
ength.	Diameter	Finish Point Coating Collation Count Item Bright Chisel Plain 30° Paper Tape Strip 3100 HF2'						Co	ompa	atible	e Wi	th
3"	.120"	Bright	Chisel	Plain	30° Paper Tape Strip	3100	HF27EPAK					
3"	.120"	Bright	Chisel	Sencote	30° Paper Tape Strip	1000	HF27EDB					
								F-35XP	FN91T1	FINISHPRO®325XP	FINISHPRO®701XP	FINISHERO /SIXE @/SIXE-SE






SMOOTH SHANK PLASTIC COLLATED NAILS

					ILLATED NA	LJ						
FRAMIN	IG, SHEATH	IING, SUBFLO	OR, DECK	S, TRUSSE	S & PALLETS							
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Co	mpa	atible	e Wi	th
23/8"	.113"	Bright	Diamond	Sencote	21° Plastic Strip	5000	GD24APBSN					
2½"	.113"	Bright	Diamond	Sencote	21° Plastic Strip	5000	GD25APBSN					
3"	.120"	Bright	Diamond	Sencote	21° Plastic Strip	4000	HD27APBSN					
2½"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD25APBSN					
3"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	1000	KD27APBSNR					
3"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD27APBSN					
31/4"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	1000	KD28APBSNR					
3¼"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD28APBSN					
3½"	.131"	Bright	Diamond	Sencote	21° Plastic Strip	4000	KD29APBSN					
3"	.148"	Bright	Diamond	Sencote	21° Plastic Strip	4000	MD27APBSN					
3¼"	.148"	Bright	Diamond	Sencote	21° Plastic Strip	4000	MD28APBSN					
2½"	.113"	Galv	Diamond	Sencote	21° Plastic Strip	5000	GD25AABSN					
2½"	.131"	Galv	Diamond	Sencote	21° Plastic Strip	2500	KD25AABS					
2¾"	.113"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	GD24ASBS					
3"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	1000	KD27ASBSNR					
3"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	KD27ASBS					
3¼"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	1000	KD28ASBSNR					
3¼"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	KD28ASBS					
3½"	.131"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	KD29ASBS					
				•	•		•	F-35FRHXP	FN81T1	FINISHPRO®325FRHXP	FINISHPRO®702XF	FINISHPRO®752XP & 752XP-SL
								ÄHX	=	HPR	HPR	HPR.
								Đ		083	0®7	0 ₈ 7
										25F	02X	52X
										모	Ŧ	P
										¥		75
												2 <u>X</u>
												P-S




ength	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Coi	mpa	tible	e Wi	th
2"	.113"	Bright	Diamond	Sencote	21° Plastic Strip	5000	GL21APBSN					
2¾"	.113"	Bright	Diamond	Sencote	21° Plastic Strip	5000	GL24APBSN					(
2¾"	.113"	Galv	Diamond	Sencote	21° Plastic Strip	5000	GL24AABSN					(
2"	.113"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	GL21ASBS					
2¾"	.113"	Hot Dip	Diamond	Sencote	21° Plastic Strip	1000	GL24ASBSNR					(
2¾"	.113"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	GL24ASBS					
3"	.120"	Hot Dip	Diamond	Sencote	21° Plastic Strip	2500	HL27ASBS					
2¾"	.113"	Stainless 304	Diamond	Sencote	21° Plastic Strip	1000	GL24AGBS					(
3"	.120"	Stainless 304	Diamond	Sencote	21° Plastic Strip	1000	HL27AGBS					
								F-35FRHXP	FN81T1	FINISHPRO®325FRHXP	FINISHPRO®702XP	





RING SHANK SUBFLOORING NAILS


SUBFLOOR & SHEATHING											
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With			
2"	.099"	Bright Basic	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BT21APBF	• •			
23/8"	.113"	Bright Basic	Diamond	Sencote	15° Flat Wire Welded Coil	4000	GT24APBF				
2½"	.131"	Bright Basic	Diamond	Sencote	15° Flat Wire Welded Coil	4000	KT25APBF				
								SCN65XP & 65XP-SL SCN60XP			





SMOOTH SHANK COIL NAILS

FRAMI	FRAMING, SHEATHING, PALLETS, SUBFLOOR, DECKS & TRUSSES											
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With				
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21APBF	• •				
2½"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25APBF					
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HD27APBF					
21/2"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD25APBF					
3"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD27APBF					
31/4"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD28APBF					
31/2"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD29APBF					
5"	.148"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	1800	MD34APBF					
2"	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21AABF					
21/2	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25AABF					
3"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD27ASBF					
31/4"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD28ASBF					
								SCN65XP & 65XP-SL SCN60XP				






RING SHANK COIL NAILS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BL21APBF	• •
2"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BT21APBF	
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL21APBF	
23/8"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL24APBF	
21/4"	.099"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BE23AABF	
23/8"	.113"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24ASBF	
3"	.120"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	HL27ASBF	
2¾"	.113"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24AGBF	

:N60XP N65XP & 65XP-SL





SCREW SHANK COIL NAILS

		•			CKS & TRUSSES			
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK21BPBFN	
21/4"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK23BPBFN	
21/2"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	6000	BK25BPBFN	
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HK27APBFN	
								SCN65XP & 65XP-SL SCN60XP





SMOOTH SHANK STIFF-STOCK COIL NAILS

FASTEN	FASTENING WOOD TO MASONRY										
Length	ngth Diameter Finish Point Coating Collation Count Item Code Compatible										
11/2"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3000	M003011				




DUPLEX SMOOTH SHANK COIL NAILS

FRAMIN	FRAMING, TRUSSES, CRATING & CONCRETE FORMS										
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With			
21/8"	.120"	Bright	Diamond	Plain	15° Flat Wire Welded Coil	5400	HR22APAF				
21/8"	.120"	Bright	Diamond	Plain	15° Flat Wire Welded Coil	3600	HR74APAF				
*Requires	SCNE										



DRYWALL RING SHANK BUGLE HEAD COIL NAILS


FASTENING DRYWALL TO WOOD										
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With		
1½"	.099"	Galv	Diamond	Plain	15° Conical Wire Welded Coil	6400	BG17AAAQ			
15/8"	.099"	Galv	Diamond	Plain	15° Conical Wire Welded Coil	6400	BG18AAAQ			





COLLATED CONCRETE & STEEL PINS


DRYWALL TRACK, WOOD FURRING, HAT CHANNELS, METAL WASHERS OR CEILING GRID TO CONCRETE, CONCRETE BLOCK & STEEL											
Length	ngth Diameter Finish Point Coating Collation Count Item Code										
1/2"	.109"/.118"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3050YXS				
3/4"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3075YXC				
1"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3100YXC				
11/4"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3125YXC				
1½"	.109"	Zinc Plated	Pinched	Plain	Straight Plastic Collated Strip	1000	W3150YXC				
								SCI			





HARDENED METAL CONNECTOR NAILS

JOIST H	JOIST HANGERS, FOUNDATION ANCHORS, SEISMIC & HURRICANE STRAPS/TIES											
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Com	npatil	ble W	/ith	
1½"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	3000	MD17AQBD					
21/2"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	2500	MD25AQBDN					
21/2"	.162"	Bright	Diamond	Plain	34° Paper Tape Strip	2000	ND25AQBDN					
21/2"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2500	MD25AJBDN					
1½"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	3000	MD17AJBDN					
21/2"	.162"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2000	ND25AJBDN					
								JN91H1	JN91	JN91	JN91	
								弎	Ĭ	91P1	91P2	





NON-HEAT TREATED METAL CONNECTOR NAILS

STANDARD TENSILE, NO	N-HARDENED NAILS FOR JOIST HANGERS,
FOUNDATION ANCHORS.	SEISMIC & HURRICANE STRAPS/TIES

	3, 1 = 3												
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible V		Vith			
1½"	.131"	Bright	Diamond	Plain	34° Paper Tape Strip	2000	M002261						
11/2"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	2000	M002263						
2½"	.148"	Bright	Diamond	Plain	34° Paper Tape Strip	1500	M002265						
11/2"	.131"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2000	M002262						
11/2"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	2000	M002264						
2½"	.148"	Hot Dip	Diamond	Plain	34° Paper Tape Strip	1500	M002266						
								5	F	F	Ę		

JN91P2
JN91P1
JN91H2
JN91H1



11/4"

11/4"

11/4"

11/2'

13/4"

2"

1" CROWN HEAVY WIRE STAPLES

Chisel

Chisel

Chisel

Chisel

Chisel

Chisel

SHEATHING, HOUSE WRAP, COMPOSITE ROOFING, ROOFING FELT, CORRUGATED CONTAINERS, FOAM INSULATION BOARD, FURNITURE/CABINET FRAMES & BUTT JOINTS

Sencote

Coated

Plain

Sencote

Sencote

Sencote

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/8"	Galv	Chisel	Plain	Glued	10,000	P06BAA*	
1/2"	Galv	Chisel	Sencote	Taped	10,000	P08BABT*	
5/8"	Galv	Chisel	Sencote	Taped	10,000	P10BAB*	
5/8"	Galv	Divergent	Sencote	Glued	10,000	P10FAB*	
5/8"	Galv	Chisel	Coated	Glued	10,000	P10BPE*	
3/4"	Galv	Chisel	Sencote	Taped	10,000	P11BAB	
3/4"	Galv	Chisel	Coated	Glued	10,000	P11BPE	
7/8"	Galv	Chisel	Sencote	Taped	10,000	P12BAB	
1"	Galv	Chisel	Sencote	Taped	10,000	P13BAB	
1"	Galv	Chisel	Sencote	Glued	10,000	P13BPE	
1"	Galv	Chisel	Plain	Glued	1000	P13BABR	• •

Taped

Glued

Glued

Taped

Taped

Taped

Taped

10,000

10,000

1000

10,000

5000

5000

5000

P15BAB

P15BPE

P15BABR

P17BAB

P19BAB

P21BAB

P13BGBN


Galv

Galv

Galv

Galv

Galv






^{1&}quot; | Stainless 304 | Outside Chisel | So *Use kit #YK0883 with PS15XP for 3%"-5%" staples



7/16" CROWN HEAVY WIRE STAPLES


7/16	" CROWN	HEAV 1	WIKE 51	APLES					
SHEATHING	G, SOFFITS, UN	DERLAYMEN	IT, LATTICE, C	ABINETS, CAS	SEBACKS & D	RAWERS			
Length	Finish	Point	Coating	Collation	Count	Item Code	Compa	tible W	ith
11/8"	Bright	Chisel	Sencote	Taped	10,000	N14BRB	• •		
11/4"	Bright	Chisel	Sencote	Taped	10,000	N15BRB			
13/8"	Bright	Chisel	Sencote	Taped	10,000	N16BRB	• •		
1½"	Bright	Chisel	Sencote	Taped	10,000	N17BRB			
15⁄8″	Bright	Chisel	Sencote	Taped	10,000	N18BRB			
13/4"	Bright	Chisel	Sencote	Taped	10,000	N19BRB			
2"	Bright	Chisel	Sencote	Taped	10,000	N21BRB		• •	
1/2"	Galv	Chisel	Sencote	Glued	5000	N08BABN			
3/4"	Galv	Chisel	Sencote	Glued	5000	N11BAB			
7/8	Galv	Chisel	Sencote	Glued	5000	N12BABN			
7/8	Galv	Diverg	Sencote	Glued	5000	N12FABN			
1"	Galv	Chisel	Sencote	Glued	5000	N13BAB	• •		
1"	Galv	Diverg	Sencote	Glued	5000	N13FAB		• •	
11/8"	Galv	Chisel	Sencote	Taped	10,000	N14BAB			
11/4"	Galv	Chisel	Sencote	Taped	10,000	N15BAB			
13/8"	Galv	Chisel	Sencote	Taped	10,000	N16BAB			
1½"	Galv	Chisel	Sencote	Taped	10,000	N17BAB			
15/8″	Galv	Chisel	Sencote	Taped	10,000	N18BAB			
13/4"	Galv	Chisel	Sencote	Taped	10,000	N19BAB			
2"	Galv	Chisel	Sencote	Taped	10,000	N21BAB			
1/2"	Galv*	Chisel	Sencote	Glued	5000	N08BBBN			
1/2"	Galv*	Diverg	Sencote	Glued	5000	N08FBB			
5/8"	Galv*	Chisel	Sencote	Glued	5000	N10BAB			
3/4"	Galv*	Diverg	Sencote	Glued	5000	N11FBB			
1½"	Stainless 304	Chisel	Sencote	Glued	3000	N17BGB		• •	
13/4"	Stainless 304	Chisel	Sencote	Glued	3000	N19BGBN			
2"	Stainless 304	Chisel	Sencote	Glued	3000	N21BGBN			
*Galvanized h	nigh-tensile steel	I					Z Z	s s	Ş
							NS2OBX NS2OXP	SNS45 SNS41	IS5
							NS20BXP	SNS45XP SNS41	SNS50XP
							Ð	U	-0






7/16" CROWN HEAVY WIRE STAPLES

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1½"	Bright	Chisel	Sencote	Taped	5000	Q17BRB	
13/4"	Bright	Chisel	Sencote	Taped	5000	Q19BRB	
2"	Bright	Chisel	Sencote	Taped	5000	Q21BRB	
21/4"	Bright	Chisel	Sencote	Taped	5000	Q23BRB	
2½"	Bright	Chisel	Sencote	Taped	5000	Q25BRB	
11/4"	Galv	Chisel	Sencote	Taped	5000	Q15BAB	
11/2"	Galv	Chisel	Sencote	Taped	5000	Q17BAB	
13/4"	Galv	Chisel	Sencote	Taped	5000	Q19BAB	
2"	Galv	Chisel	Sencote	Taped	5000	Q21BAB	
2½"	Galv	Chisel	Sencote	Taped	5000	Q25BAB	
2½"	Stainless 304	Chisel	Sencote	Taped	1000	Q25BGBN	
							SQS



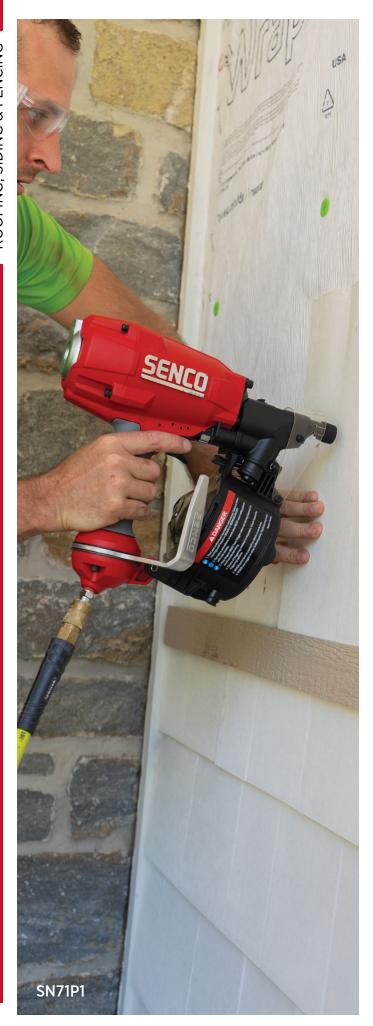

ROOFING, SIDING & FENCING

WE COVER IT ALL

When it comes to roofing applications or installing siding, uptime is everything. SENCO has designed a full line of tools and fasteners to maximize your productivity. Our RoofPro™445XP with its innovative firing valve uses 5% less air. A bi-metal driver blade increases durability and our power in, power out feed system is air driven for stability and speed.

APPLICATIONS

SENCO offers a variety of coil nailers and crown staplers with fasteners optimized for different types of shingles, siding, sheathing, and felt underlayment.

KEY FEATURES

- High-strength housings
- Long-lasting wear plates
- Easy, one-handed operation
- Adjustable depth of drive

13/4" COIL NAILER







TOOL OVERVIEW

- Drives 15° coil roofing nails 3/4" to 13/4" in length
- Innovative firing valve reduces air consumption without compromise on power & speed
- Bi-metal driver blade reduces wear & improves durability
- Canister metal wear plate reduces canister wear & aids in nail feed
- Adjustable & removable shingle guide for accurate shingle placement

APPLICATIONS

Asphalt & fiberglass shingle nailing, attaching tar paper, metal drip edge & insulation board (vinyl & aluminum siding with optional attachment #HA0308)

TOOL OVERVIEW

- Drives 15° coil roofing nails 1¼" to 2½" in length
- Dual collation-allows the choice between wire or plastic collation
- Tool-free depth of drive
- High load capacity (up to 375 nails)
- Overmold grip
- Rotatable rafter hook

APPLICATIONS

Siding, decking, exterior trim, fencing, wood shingles, crate, box assembly



MODEL NAME ITEM #	ROOFPRO™445XP 8V0001N	SN71P1		
Trigger	Contact	Selectable		
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	3.86 scfm	4.6 scfm		
Air Inlet	1⁄4" NPT	38" NPT		
Weight	5.2 lbs (2.35 kg)	5.58 lbs (2.53 kg)		
Height	10.9" (276 mm)	12.75" (324 mm)		
Length	10.6" (269 mm)	11.63" (295 mm)		
Width	4.5" (114 mm)	5.06" (129 mm)		
Main Body Material	Aluminum	Magnesium		
Warranty	5 yrs	5 yrs		
FASTENERS	FASTENERS ARE LOC.	ATED ON PAGES 49-50		
Range	3/4"-13/4"	11/4"-21/2"		
Diameter	.120"	.082"092"		
Capacity	120	250-375		
Angle/Collation	15° Flat Wire Welded	Coil 15° Flat Wire Welded or Plastic Carrier Coil		





TOOL OVERVIEW

- Drives 16 GA. 1" crown staples %" to $1\frac{1}{2}$ " in length
- Quick clear latch to easily clear jams or misfeeds
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance
- Robust firing valve makes the tool faster, more powerful & easier to maintain

APPLICATIONS

Asphalt & fiberglass shingles, roofing felt, wire lathe, foam insulation board

TOOL OVERVIEW

- Drives 21 GA. ½" crown staples 5/8" in length & 1" caps
- Easily load both staples & caps with the EZ-Load system
- Ultra-lightweight for ease of use & maneuverability
- Integrated belt hook for quick access to the tool when needed
- Side mounted cap collector holds caps regardless of tool position
- Includes 1/4" male coupler



House wrap & roofing felt installation

A11

20 GA. 7/16" CROWN, 3/8"HAMMER STAPLER







TOOL OVERVIEW

• Drives 20 GA. 7/16" crown staples 3/8" in length

APPLICATIONS

Plastic sheeting




MODEL NAME LITEM #	DC1EDVD QUQQQ1N	DCES 440001N	A11 DC0700
MODEL NAME ITEM #	PS15RXP 9U0001N	BC58 4A0001N	A11 PC0700
Trigger	Contact	Contact	_
Operating Pressure	70-120 psi (4.8-8.3 bar)	60-95 psi (4.1-6.5 bar)	_
Air Consumption (60 CPM)	3.18 scfm	.77 scfm	-
Air Inlet	3/8" NPT	1⁄4" NPT	-
Weight	5.5 lbs (2.5 kg)	4.1 lbs (2 kg)	2 lbs (.9 kg)
Height	9" (229 mm)	8.5" (216 mm)	1.75" (44.4 mm)
Length	15.25" (387 mm)	12.5" (317 mm)	12.3" (312.4 mm)
Width	4" (105 mm)	3.5" (89 mm)	-
Main Body Material	Aluminum	Aluminum	Steel
Warranty	5 yrs	5 yrs	1 yr
FASTENERS		FASTENERS ARE LOCATED ON PAGES 50-	51
Gauge	16	21	20
Crown	1"	1/2"	7/16"
Range	5/8"-11/2"	5/8"	3/8"
Capacity	160	110	168
Angle/Collation	Taped & taped glued	Glued Staple, Laser Welded Cap	Straight Glued Strip



SMOOTH SHANK COIL NAILS


Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/4"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003101	
1"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003103	
11/4"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003104	
1½"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003105	
13/4"	.120"	Galv	Diamond	Plain	15° Flat Wire Welded Coil	7200	M003106	
								ROOFPRO™445XP





SMOOTH SHANK COIL NAILS


SIDING,	SIDING, PACKAGING, FENCING, PALLETS & UNDERLAYMENT								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With	
1½"	.099"	Bright	Diamond	Sencote	15° Plastic Carrier Coil	6000	BD17APBC		
21/4"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	ED23AABH		
21/4"	.092"	Hot Dip	Diamond	Sencote	15° Plastic Carrier Coil	3600	EJ23ASBC		
								SN71P1	





RING SHANK COIL NAILS


Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
11/4"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	14,000	SE15APBH	
11/4"	.082"	Bright	Diamond	Sencote	15° Conical Wire Welded Coil	15,000	SE15APB	
1½"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	11,200	SE17APBH	
13/4"	.082"	Bright	Diamond	Sencote	15° Conical Wire Welded Coil	12,000	SE19APB	
11%"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20AABH	
21/4"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AABH	
13/4"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19ASBH	
11/8"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20ASBH	
2"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21ASBH	
21/4"	.092"	Hot Dip	Diamond	Sencote	15° Plastic Carrier Coil	3600	EL23ASBC	
21/4"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23ASBH	
13/4"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19AGBH	
2"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21AGBH	
21/4"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AGBH	
								SN71P1






1" CROWN HEAVY WIRE STAPLES

COMPOSITE ROOFING, ROOFING FELT, FOAM INSULATION BOARD, HOUSE WRAP, SHEATHING, CORRUGATED CONTAINERS, FURNITURE/CABINETS & BUTT JOINTS									
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With		
3/8"	Galv	Chisel	Plain	Glued	10,000	P06BAA*			
1/2"	Galv	Chisel	Sencote	Taped	10,000	P08BABT*			
5/8"	Galv	Chisel	Sencote	Taped	10,000	P10BAB*			
5/8"	Galv	Divergent	Sencote	Glued	10,000	P10FAB*			
5/8"	Galv	Chisel	Coated	Glued	10,000	P10BPE*			
3/4"	Galv	Chisel	Sencote	Taped	10,000	P11BAB			
3/4"	Galv	Chisel	Coated	Glued	10,000	P11BPE			
7/8"	Galv	Chisel	Sencote	Taped	10,000	P12BAB			
1"	Galv	Chisel	Sencote	Taped	10,000	P13BAB			
1"	Galv	Chisel	Sencote	Glued	10,000	P13BPE			
11/4"	Galv	Chisel	Sencote	Taped	10,000	P15BAB			
11⁄4″	Galv	Chisel	Coated	Glued	10,000	P15BPE			
1½"	Galv	Chisel	Sencote	Taped	10,000	P17BAB			
1"	Stainless 304	Outside Chisel	Sencote	Taped	5000	P13BGBN			








CAP STAPLE 1" CAP & ½" CROWN STAPLES

ROOF FELT INSTALLATION & HOUSE WRAP									
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With		
5/8"	Galv	Chisel	Plain	Glued	2200	M004003			
1"	Plastic	_	_	Laser Weld	2200	M004092			
							BC58		







7/16" CROWN FINE WIRE STAPLES

ROOFING, INSULATION & VAPOR BARRIERS								
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With	
3/8"	Galv	Chisel	Plain	Glued	5000	H06BAA		
							≥	





PALLETS & CRATING

THE DURABILITY TO DRIVE ALL DAY

SENCO's PalletPro™ heavy-duty coil nailers are built specifically for the challenges of pallets and crating. The PalletPro™130XP can drive fasteners as long as 5%" and hold up to 225 nails.

APPLICATIONS

Pallets, crates, heavy-duty framing and truss attachment.

KEY FEATURES

- Durable drivers and bumpers
- Flexible collation deflectors
- · Dust guards for safe operation and extended use

Clinch and sisal anvil 18 and 20 gauge staple tools drive $\frac{1}{2}$ " and $\frac{1}{16}$ " crown staples and are ideal for hand-held or mounted applications.

APPLICATIONS

Packaging, corrugated box fabrication, shoe making and bedding – basically any time two materials must be stapled and clinched together.

KEY FEATURES

- High-capacity magazines
- · Extended reach capability
- · Tool-free adjustable anvil opening
- Bottom-load magazines

PALLETS & CRATING







TOOL OVERVIEW

- Drives 15° flat wire wound coil nails 1" to 21/4" in length
- High capacity magazine holds up to 350 fasteners
- Tool-free depth adjustment for consistent flush or countersunk drives
- Side steel wear plates reduce abrasion
- Strengthened driver & piston bumper improve performance & durability

APPLICATIONS

Boxes, carton to skid, crate & pallet assembly

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2¼" to 4" in length
- Strengthened driver & piston bumper improve performance & durability
- · Heavy-duty threaded T-handle for extra stability when needed
- Flexible collation deflector & debris shield protects the operator & tool when in use

APPLICATIONS

Pallets, framing, engineered lumber, truss attachment, commercial applications

PALLETPRO™130XP

51/8" 15° COIL NAILER (SPECIAL ORDER TOOL)





TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 3" to 5%" in length
- · Strengthened driver & piston bumper improve performance & durability
- Heavy-duty threaded T-handle for extra stability when needed
- High capacity magazine holds up to 225 fasteners

APPLICATIONS

Heavy-duty pallet construction, pallet repair, crate & box assembly, sheathing, decking, subflooring



__. ________

TOOL SPECIFICATION	IS		
MODEL NAME ITEM #	PALLETPRO™57FXP 4L0001N	PALLETPRO™100XP 5L0001N	PALLETPRO™130XP 5M0001N
Trigger	Contact	Contact	Sequential
Operating Pressure	70-120 psi (4.9-8.4 bar)	70-120 psi (4.9-8.4 bar)	70-120 psi (4.9-8.4 bar)
Air Consumption (60 CPM)	3.07 scfm	11.4 scfm	11.4 scfm
Air Inlet	3%" NPT	3%" NPT	3/8" NPT
Weight	5.9 lbs (2.67 kg)	11.5 lbs (5.24 kg)	13 lbs (5.9 kg)
Height	11.25" (286 mm)	16.5" (418 mm)	18" (457 mm)
Length	11.88" (302 mm)	13.25" (338 mm)	13" (330 mm)
Width	5.25" (123 mm)	6" (153 mm)	6.6" (168 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS	F	FASTENERS ARE LOCATED ON PAGES 55-5	57
Range	1"-21/4"	21/4"-4"	3"-51/8"
Diameter	.082"092"	.099"148"	.120"148"
Capacity	300-350	225-300	120-225
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil

20 GA. 1/2" CROWN, 1/2" STAPLE CLINCH TOOL



20_{GA}

F75LXP



TOOL OVERVIEW

- Drives 20 GA. $\frac{1}{2}$ " crown staples $\frac{1}{6}$ " to $\frac{1}{2}$ " in length
- High capacity magazine holds 230 fasteners
- Tool-free adjustable anvil opening
- Bottom-load magazine for quick reloading
- Ergonomic overmolded grip reduces fatigue & increases control of the tool

APPLICATIONS

Corrugated box fabrication, assembly & packaging

TOOL OVERVIEW

- Drives 18 GA. %6" crown staples
 3%" to 5%" in length
- High capacity magazine holds 152 fasteners
- Tool-free adjustable anvil opening
- Bottom-load magazine for quick reloading
- Ergonomic overmolded grip reduces fatigue & increases control of the tool

APPLICATIONS

Corrugated box fabrication, assembly & packaging

F75SXP

18 GA. 7/16" CROWN, 5%" STAPLE SISAL ANVIL





TOOL OVERVIEW

- Drives 18 GA. 7/16" crown staples 3/8" to 5/8" in length
- High capacity magazine holds 152 fasteners
- Tool-free adjustable anvil opening
- Bottom-load magazine for quick reloading

APPLICATIONS

Corrugated box fabrication, assembly & packaging




MODEL NAME ITEM #	DFPXP 8H0001N	F75LXP 8J0002N	F75SXP 8J0001N		
Trigger	Sequential	Sequential	Sequential		
Operating Pressure	65-100 psi (4-7 bar)	65-100 psi (4-7 bar)	65-100 psi (4-7 bar)		
Air Consumption (60 CPM)	.7 scfm	.7 scfm	.8 scfm		
Air Inlet	1/4" NPT	1/4" NPT	1⁄4" NPT		
Weight	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)		
Height	12.9" (327 mm)	12.9" (327 mm)	12.9" (327 mm)		
Length	14.9" (380 mm)	14.9" (380 mm)	14.9" (380 mm)		
Width	3" (75 mm)	3" (75 mm)	3" (75 mm)		
Main Body Material	Aluminum	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs	5 yrs		
FASTENERS		FASTENERS ARE LOCATED ON PAGE 57			
Gauge	20	18	18		
Crown	1/2"	7/16"	⁷ / ₁₆ "		
Range	5/16"-5/8"	5/16"-5/8"	5/16"-5/8"		
Capacity	230	152	152		
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip		



SMOOTH SHANK COIL NAILS

PALLET	PALLETS, FRAMING, SHEATHING, SUBFLOOR, DECKS, TRUSSES, CRATES, FENCING, SIDING & UNDERLAYMENT								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With	
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21APBF		
21/2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25APBF		
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HD27APBF		
21/2"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD25APBF		
3"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD27APBF		
31/4"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD28APBF		
31/2"	.131"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	3600	KD29APBF		
5"	.148"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	1800	MD34APBF		
21/4"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	ED23AABH	• •	
2"	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD21AABF		
2½"	.113"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GD25AABF		
3"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD27ASBF	• •	
31/4"	.131"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	KD28ASBF	• •	
								PALLETPRO""130XP PALLETPRO""100XP PALLETPRO"*57FXP	

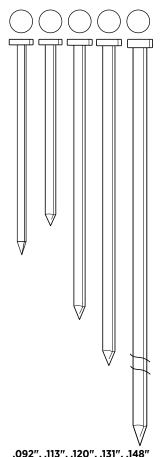


.092", .113", .120", .131", .148" 2" - 5"



RING SHANK COIL NAILS


Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
11/4"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	14,000	SE15APBH	
1½"	.082"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	11,200	SE17APBH	
11%"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20AABH	
21/4"	.092"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AABH	
13/4"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19ASBH	
11//8"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL20ASBH	
2"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21ASBH	
21/4"	.092"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23ASBH	
13/4"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL19AGBH	
2"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL21AGBH	
21/4"	.092"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	3600	EL23AGBH	
								PALLETPRO™57FXP





RING SHANK COIL NAILS


PALLET	PALLETS, FRAMING, SHEATHING, SUBFLOOR, DECKS & TRUSSES								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With	
2"	.099"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BL21APBF		
2"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL21APBF		
23/8"	.113"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	6000	GL24APBF		
21/4"	.099"	Galv	Diamond	Sencote	15° Flat Wire Welded Coil	6600	BE23AABF		
23/8"	.113"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24ASBF		
3"	.120"	Hot Dip	Diamond	Sencote	15° Flat Wire Welded Coil	2400	HL27ASBF		
23/8"	.113"	Stainless 304	Diamond	Sencote	15° Flat Wire Welded Coil	2700	GL24AGBF		
								PALLETPRO""130XP PALLETPRO""100XP	





RING SHANK NAILS

Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	.099"	Bright Basic	Diamond	Sencote	150 Flat Wire Welded Coil	6600	BT21APBF	
23/8"	.113"	Bright Basic	Diamond	Sencote	150 Flat Wire Welded Coil	4000	GT24APBF	
2½"	.131"	Bright Basic	Diamond	Sencote	150 Flat Wire Welded Coil	4000	KT25APBF	
								PALLETPRO"100XP






SCREW SHANK COIL NAILS

PALLET	PALLETS, FRAMING, SHEATHING, SUBFLOOR, DECKS & TRUSSES									
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With		
2"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK21BPBFN			
21/4"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	9000	BK23BPBFN			
2½"	.099"	Bright	Blunt Dia.	Sencote	15° Flat Wire Welded Coil	6000	BK25BPBFN			
3"	.120"	Bright	Diamond	Sencote	15° Flat Wire Welded Coil	4000	HK27APBFN			


PALLETPROT100XP PALLETPRO™130XP





1/2" CROWN FINE WIRE STAPLES

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
3/8"	Galv	Chisel	Sencote	Glued Strip	10,000	F06BAA	
3/8"	Galv	Chisel	Sencote	Glued Strip	24,000	F06BAAP	
1/2"	Galv	Chisel	Sencote	Glued Strip	10,000	F08BAAN	
1/2"	Galv	Chisel	Sencote	Glued Strip	15,000	F08BAAP	
5/16"	Galv	Chisel	Sencote	Glued Strip	24,000	F05BAAP	
3/8"	Stainless 304	Chisel	Sencote	Glued Strip	10,000	F06BGA	




Ρ̈́Ρ




7/16" CROWN FINE WIRE STAPLES

Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1/2"	Galv	Chisel	Plain	Glued Strip	5000	J08BAAN	• •
5/8"	Galv	Chisel	Plain	Glued Strip	5000	J10BAAN	• •
7/8"	Gaiv	Cnisei	Plain	Glued Strip	5000	JIUBAAN	F75SXP F75LXP





Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With		
5/8"	Liquor	Chisel	Plain	Glued Strip	2000	U10BCA			
3/4"	Liquor	Chisel	Plain	Glued Strip	2000	U11BCA			





UPHOLSTERY & FURNITURE

SENCO HAS YOU COVERED

SENCO offers a range of fine and medium wire staplers for upholstery and furniture assembly. Our upholstery staplers are the most customizable in the industry, with long nosepieces, extended magazines and a wide range of fasteners for any project.

APPLICATIONS

Upholstery, furniture assembly, cabinets, bedding, picture frames, molding, roof felt, house wrap, RV construction.

KEY FEATURES

- Lightweight
- Ergonomic
- Variety of configurations

SFT10XP

3/6", 3/8", 1/2" CROWN, 5/8" FINE WIRE STAPLERS





SFT10XP-DOUBLE LENGTH MAGAZINE

3/8", 1/6", 1/2" CROWN, 5/8" FINE WIRE STAPLERS



SFT10XP - LONG NOSE

3/8" CROWN, 5/8" FINE WIRE STAPLER





APPLICATIONS

assembly

TOOL OVERVIEW

- Standard nose & magazine
- Multiple versions see table below
- · Rear exhaust directs oil away from the work surface
- · One-handed magazine release for quick & easy reloading
- Slender design for an improved line of sight

APPLICATIONS

Upholstery, cabinets, molding, furniture assembly

- · Multiple versions -
- One-handed magazine release for quick & easy reloading
- Slender design for an

TOOL OVERVIEW

- · Standard nose, double length magazine
- see table below
- Rear exhaust directs oil away from the work surface
- improved line of sight

APPLICATIONS

Upholstery, cabinets, molding, furniture assembly

TOOL OVERVIEW

- Long nose, standard Upholstery, furniture magazine version see table below
- oil away from the work surface
- One-handed magazine release for quick & easy reloading
- Slender design for an improved line of sight

Rear exhaust directs

SFT10XP WITH LONG NOSE:

CROWN	GA	STAPLE	DESCRIPTION	ITEM #
3/8"	22	C Wire	Standard	6S0421N

SFT10XP:

CROWN	GA	STAPLE	DESCRIPTION	ITEM #
3/16"	22	A/D Wire	Standard	6S0001N
3/16"	22	A/D Wire	Auto	6S0101N
1/2"	22	B Wire	Standard	6S0011N
3/8"	22	C Wire	Standard	6S0021N
3/8"	22	C Wire	Auto	6S0121N
3/16"	20	E Wire	Standard	6S0031N
1/2"	20	F Wire	Standard	6S0041N
3/8"	20	G Wire	Standard	6S0051N

SFT10XP W/ DOUBLE LENGTH MAGAZINE:

CROWN	GA	STAPLE	DESCRIPTION	IIEM#
1/2"	22	B Wire	Auto	6S0311N
3/8"	22	C Wire	Standard	6S0221N
3/8"	22	C Wire	Auto	6S0321N
1/2"	20	F Wire	Auto	6S0341N
3/8"	20	G Wire	Standard	6S0251N
7/16"	20	H Wire	Auto	6S0361N

MODEL NAME ITEM #	SFT10XP ITEM # ABOVE	SFT10XP - DBL. LENGTH MAG. ITEM # ABOVE	SFT10XP - LONG NOSE ITEM # ABOVE
Trigger	Sequential or Auto	Sequential or Auto	Sequential
Operating Pressure	60-95 psi (4.1-6.5 bar)	60-95 psi (4.1-6.5 bar)	60-95 psi (4.1-6.5 bar)
Air Consumption (60 CPM)	.77 scfm	.77 scfm	.77 scfm
Air Inlet	1⁄4" NPT	¼" NPT	1/4" NPT
Weight	2.1 lbs (0.955 kg)	2.1 lbs (0.955 kg)	2.1 lbs (0.955 kg)
Height	6.57" (167 mm)	6.57" (167 mm)	6.57" (167 mm)
Length	8.58" (218 mm)	8.58" (218 mm)	8.58" (218 mm)
Width	1.65" (42 mm)	1.65" (42 mm)	1.65" (42 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCATED ON PAGES 61-6.	2
Gauge	22, 20	22, 20	22
Crown	3/16", 3/8", 1/2"	3/8", 7/16", 1/2"	3/8"
Range	1/4"-5/8"	1/4"-5/8"	1/4"-5/8"
Capacity	92	110	92
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip





TOOL OVERVIEW

- Drives 22 GA. 3/8" crown staples 3/16" to 5/8" in length
- Long 1" lip makes getting into tight spots easier
- Ultra-lightweight for ease of use & maneuverability
- Rear exhaust keeps oil off fabric
- Rounded steel cap that won't snag fabric

APPLICATIONS

Upholstery, cabinets, molding, furniture assembly

TOOL OVERVIEW

NS20BXP

- Drives 16 & 17 GA. 7/16" crown staples 1" to 2" in length
- 14 staple per second multidirectional stiching
- Quick clear latch to easily clear jams or misfeeds
- Drive track eliminates unwanted movement of staple, enhancing overall drive performance

APPLICATIONS

20B

Sheathing, furniture framing, crate & box assembly, subflooring, pallets, roof decking, fascia, cedar shingles

SNS45XP

16 GA. 7/16" CROWN, 2" CONSTRUCTION STAPLER



APPLICATIONS

On-site & manufactured housing, roof & floor decking, sheathing, subflooring, fascia & soffits, lathing, fencing & cedar shingles, furniture frames, boxes, crates, pallets & pallet repair

SNS50XP

16 GA. 7/6" CROWN, 2" CONSTRUCTION STAPLER



TOOL OVERVIEW

- Drives 16 GA. 7/16" crown staples 11/4" to 2" in length
- Fast-up to 15 staples per second
- Quick clear latch to easily clear jams or misfeeds
- Tool-free depth adjustment for consistent flush or countersunk

APPLICATIONS

Framing, sheathing, subflooring, crate & box assembly, pallets & pallet repair

TOOL SPECIFICATIONS

TOOL OVERVIEW

jams or misfeeds

drives

Drives 16 GA. 7/16" crown

staples 1" to 2" in length

Fast-up to 15 staples per second

Quick clear latch to easily clear

Tool-free depth adjustment for

consistent flush or countersunk

OUL SPECIFICATION	10			
MODEL NAME ITEM #	SFW09 4C0001N	NS20BXP 9Y0001N	SNS45XP 580101N	SNS50XP 750101N
Trigger	Dual	Contact	Contact	Contact
Operating Pressure	60-95 psi (4.1-6.5 bar)	70-120 psi (4.8-8.3 bar)	80-120 psi (5.5 - 8.3 bar)	80-120 psi (5.5 - 8.3 bar)
Air Consumption (60 CPM)	.77 scfm	3.98 scfm	5.52 scfm	6.54 scfm
Air Inlet	1/4" NPT	3%" NPT	3%" NPT	3/8" NPT
Weight	2.1 lbs (0.955 kg)	5.8 lbs (2.6 kg)	5.1 lbs (2.3 kg)	5.9 lbs (2.7 kg)
Height	6" (152 mm)	11" (279 mm)	11" (279 mm)	12" (305 mm)
Length	9.25" (235 mm)	15" (381 mm)	14" (356 mm)	14.38" (365 mm)
Width	1.63" (41 mm)	4" (102 mm)	3.5" (89 mm)	3.6" (92 mm)
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENERS		FASTENERS ARE LOCA	ATED ON PAGES 61, 63	
Gauge	22	16	16	16
Crown	3/8"	7/16"	⁷ / ₁₆ "	⁷ / ₁₆ "
Range	5/32"-5/8"	1"-2"	1"-2"	11/4"-2"
Capacity	110-168	160	160	160
Angle/Collation Straight Glued Strip		Straight Glued/Taped Strip	Straight Glued/Taped Strip Straight Glued/Taped Strip	



3/16" CROWN FINE WIRE STAPLES


FURNITUR	FURNITURE, UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES										
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With				
1/4"	Galv	Chisel	Sencote	Straight Glued Strip	10,000	A04BAAN					
3/8"	Galv	Chisel	Sencote	Straight Glued Strip	30,000	A06BABN					
3/8"	Galv	Chisel	Sencote	Straight Glued Strip	40,000	A06BABP					
1/2"	Galv	Chisel	Sencote	Straight Glued Strip	20,000	A08BAB					
1/2"	Galv	Chisel	Sencote	Straight Glued Strip	30,000	A08BABP					
5/8"	Galv	Chisel	Sencote	Straight Glued Strip	20,000	D10BABN					
5/8"	Galv	Chisel	Sencote	Straight Glued Strip	23,000	D10BABPN					
							SFT10XP-A/D				





1/2" CROWN FINE WIRE STAPLES


FURNITUR	URNITURE, UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES										
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With				
1/4"	Plain	Chisel	Galv	Straight Glued Strip	25,000	B04BAAPN					
3/8"	Plain	Chisel	Galv	Straight Glued Strip	40,000	B06BAAP					
1/2"	Plain	Chisel	Galv	Straight Glued Strip	25,000	B08BAAP					
							SFT10XP-B				





3/8" CROWN FINE WIRE STAPLES

FURNITUR	E, UPHOLS1	ERY, FELT,	INSULATION, C	ASEBACKS, SCREEN	IING & SHO	DES	
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/32"	Chisel	Plain	Galv	Straight Glued Strip	60,000	C02BAAPN	
³ / ₁₆ "	Chisel	Plain	Galv	Straight Glued Strip	55,000	C03BAAPN	
1/4"	Chisel	Plain	Galv	Straight Glued Strip	35,000	CO4BAAP	
1/4"	Chisel	Plain	Galv	Straight Glued Strip	5000	C04BAAR	
5/16"	Chisel	Plain	Galv	Straight Glued Strip	28,000	C05BAAPN	
3/8"	Chisel	Plain	Galv	Straight Glued Strip	50,000	C06BAAP	
3/8"	Chisel	Plain	Galv	Straight Glued Strip	5000	C06BAAR	
7/16"	Chisel	Plain	Galv	Straight Glued Strip	40,000	C07BAAPN	
1/2"	Chisel	Plain	Galv	Straight Glued Strip	35,000	C08BAAP	
1/2"	Chisel	Plain	Galv	Straight Glued Strip	5000	C08BAAR	
5/8"	Chisel	Plain	Galv	Straight Glued Strip	27,000	C10BAAP	
5/8"	Chisel	Plain	Galv	Straight Glued Strip	5000	C10BAAR	
3/16"	Chisel	Plain	Stainless 304	Straight Glued Strip	25,000	C03BGAN	
1/4"	Chisel	Plain	Stainless 304	Straight Glued Strip	25,000	C04BGAN	
3/8"	Chisel	Plain	Stainless 304*	Straight Glued Strip	10,000	СО6ВНА	• •
3/8"	Chisel	Plain	Stainless 304	Straight Glued Strip	10,000	C06BGA	• •
*High-tensile	e 304 Stainle	ss Steel					SFW09 SFT10XP-C
							хр-с





3/16" CROWN FINE WIRE STAPLES

FURNITUR	FURNITURE, UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES										
Length	Finish	Finish Point Coating Collation Count Item Code C									
5/8"	Galv	Chisel	Sencote	Straight Glued Strip	10,000	W10BAB					





3/16" CROWN FINE WIRE STAPLES


FURNITUR	FURNITURE UPHOLSTERY, FELT, INSULATION, CASEBACKS, SCREENING & SHOES										
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With				
3/8"	Galv	Chisel	Plain	Straight Glued Strip	10,000	E06BAA					
1/2"	Galv	Chisel	Plain	Straight Glued Strip	10,000	E08BAA					
5/8"	Galv	Chisel	Plain	Straight Glued Strip	5000	E10BAA					
							SFT10XP-E				





1/2" CROWN FINE WIRE STAPLES

UPHOLS	STERY, FELT, IN	SULATION	& CASEBAC	:KS			
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
1/4"	Galv	Chisel	Plain	Straight Glued Strip	10,000	F04BAAN	
1/4"	Galv	Chisel	Plain	Straight Glued Strip	17,000	F04BAAP	
5/16"	Galv	Chisel	Plain	Straight Glued Strip	24,000	F05BAAP	
3/8"	Galv	Chisel	Plain	Straight Glued Strip	10,000	F06BAA	
3/8"	Galv	Chisel	Plain	Straight Glued Strip	24,000	F06BAAP	
1/2"	Galv	Chisel	Plain	Straight Glued Strip	10,000	F08BAAN	
1/2"	Galv	Chisel	Plain	Straight Glued Strip	15,000	F08BAAP	
3/8"	Stainless 304	Chisel	Plain	Straight Glued Strip	10,000	F06BGA	
							SFT10XP-F








3/8" CROWN FINE WIRE STAPLES

UPHOLSTE	UPHOLSTERY, FELT, INSULATION & CASEBACKS											
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With					
1/4"	Galv	Chisel	Plain	Straight Glued Strip	10,000	G04BAAN						
3/8"	Galv	Chisel	Plain	Straight Glued Strip	5000	G06BABN						
1/2"	Galv	Chisel	Plain	Straight Glued Strip	5000	G08BAB						
							SFT10XP-G					





7/16" CROWN FINE WIRE STAPLES


UPHOLST	UPHOLSTERY, FELT, INSULATION & CASEBACKS										
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With				
3/8"	Galv	Chisel	Plain	Straight Glued Strip	2000	H06BAAPR					
3/8"	Galv	Chisel	Plain	Straight Glued Strip	5000	НО6ВАА					
							SFT10				
							охр-н				





7/16" CROWN HEAVY WIRE STAPLES

BINETS,	CASEBACKS, D	RAWERS, U	PHOLSTERY, S	OFFITS, UND	ERLAYMENT,	LATTICE & SH	IEATHING
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
11/8"	Bright	Chisel	Sencote	Taped	10,000	N14BRB	• •
11/4"	Bright	Chisel	Sencote	Taped	10,000	N15BRB	
13/8"	Bright	Chisel	Sencote	Taped	10,000	N16BRB	
1½"	Bright	Chisel	Sencote	Taped	10,000	N17BRB	
15/8"	Bright	Chisel	Sencote	Taped	10,000	N18BRB	
13/4"	Bright	Chisel	Sencote	Taped	10,000	N19BRB	
2"	Bright	Chisel	Sencote	Taped	10,000	N21BRB	
1/2"	Galv	Chisel	Sencote	Glued	5000	N08BABN	
3/4"	Galv	Chisel	Sencote	Glued	5000	N11BAB	
7/8	Galv	Chisel	Sencote	Glued	5000	N12BABN	
7/8	Galv	Diverg	Sencote	Glued	5000	N12FABN	
1"	Galv	Chisel	Sencote	Glued	5000	N13BAB	• •
1"	Galv	Diverg	Sencote	Glued	5000	N13FAB	• •
11/8"	Galv	Chisel	Sencote	Taped	10,000	N14BAB	
11/4"	Galv	Chisel	Sencote	Taped	10,000	N15BAB	• • •
13/8"	Galv	Chisel	Sencote	Taped	10,000	N16BAB	• • •
11/2"	Galv	Chisel	Sencote	Taped	10,000	N17BAB	
15/8"	Galv	Chisel	Sencote	Taped	10,000	N18BAB	• • •
13/4"	Galv	Chisel	Sencote	Taped	10,000	N19BAB	• • •
2"	Galv	Chisel	Sencote	Taped	10,000	N21BAB	
1/2"	Galv*	Chisel	Sencote	Glued	5000	N08BBBN	
1/2"	Galv*	Diverg	Sencote	Glued	5000	N08FBB	
5/8"	Galv*	Chisel	Sencote	Glued	5000	N10BAB	
3/4"	Galv*	Diverg	Sencote	Glued	5000	N11FBB	
1½"	Stainless 304	Chisel	Sencote	Glued	3000	N17BGB	• • •
13/4"	Stainless 304	Chisel	Sencote	Glued	3000	N19BGBN	• • •
2"	Stainless 304	Chisel	Sencote	Glued	3000	N21BGBN	• • •
Ivanized h	igh-tensile steel						SNS5 SNS4 NS20





FLOORING

HARDWOOD FLOORING DONE RIGHT

Hardwood floors aren't so hard to install with our SHF200 stand-up flooring tool. With a long, ergonomic handle and a base that easily adjusts to any floor thickness you will get your job done in no time.

APPLICATIONS

Hardwood and laminate flooring.

KEY FEATURES

- Mallet actuated pneumatic hardwood flooring nailer provides consistent driving power for a flush, professional-quality instillation
- Tongue-and-groove stapler drives 45° angle staples to eliminate tongue splitting and floor surface damage

SHF200

2" PNEUMATIC MALLET ACTUATED HARDWOOD FLOORING NAILER





TOOL OVERVIEW

- Drives 16 GA. cleat nails ½" to 2" in length
- Innovative non-marring base adjusts between ½" & ¾" flooring without the use of tools

APPLICATIONS

Hardwood Flooring

SLS20XP-HF

19 GA. ¾6" CROWN, 1" HARDWOOD & LAMINATE FLOOR STAPLER





TOOL OVERVIEW

- Drives 19 GA. 3/16" crown staples 5/8" to 1" in length
- Never-Lube® design indicates maintenance-free operation, eliminating the risk of oil
- spillover onto the work surface
- Front block easily adjusts to floor thickness

APPLICATIONS

Hardwood Flooring


TOOL SPECIFICATIONS

MODEL NAME ITEM #	SHF200 8D0001N	SLS20XP-HF 490021N		
Trigger	Sequential	Sequential		
Operating Pressure	90-110 psi (6.2-7.6 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	2.52 scfm	1.92 scfm		
Air Inlet	1⁄4" NPT	1/4" NPT		
Weight	10.1 lbs (4.58 kg)	3.2 lbs (1.5 kg)		
Height	21.5" (546 mm)	9" (228 mm)		
Length	17.8" (452 mm)	13" (332 mm)		
Width	3.1" (78 mm)	3" (76 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENERS	FASTENE	RS BELOW		
Gauge	16	19		
Crown	L-Head	3/16"		
Range	1½"-2"	5⁄8″-1″		
Capacity	107	168		
Angle/Collation	Straight Glued Strip	Straight Glued Strip		



L-HEAD FLOORING CLEAT NAILS

1/2", 5/8", 3/4	½", 5%", 3¼", 33½2" SOLID HARDWOOD FLOORING										
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With				
1½"	Bright	Blunt Diamond	N/A	Straight Glued Strip	1000	RW17BPE					
13/4"	Bright	Blunt Diamond	N/A	Straight Glued Strip	1000	RW19BPE					
2"	Bright	Blunt Diamond	N/A	Straight Glued Strip	1000	RW21BPE					
							SHF20				





3/16" CROWN FLOORING STAPLES

1/4", 5/16", 3/4" ENGINEERED & HARDWOOD FLOORS							
Length	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
5/8"	Galv	Chisel	Sencote	Straight Glued Strip	5000	R10BAB	
3/4"	Galv	Chisel	Sencote	Straight Glued Strip	5000	R11BAB	
1"	Galv	Chisel	Sencote	Straight Glued Strip	5000	R13BAB	
							SLS20XP-HP





AIR COMPRESSORS & KITS

THE INNOVATION YOU EXPECT, THE QUALITY YOU ALREADY KNOW

SENCO has you covered with industry leading compressors that provide plenty of tank storage and air flow for the job site or professional shop.

Many feature an oil-free pump design to reduce maintenance and have integrated panels that provide easy access to control knobs. There's even a compressor equipped with dual couplers so you can run two hoses simultaneously.

Count on quickly getting back to work – we offer compressors that have pump up times of less than 40 seconds. You can easily monitor output pressure with individual tank and outlet gauges. A full line of hoses and accessories is also available.

PC1131

2 HP, 4.3 GAL. TWIN TANK AIR COMPRESSOR

PC0968

1 HP, 21/2 GAL. TWIN TANK FINISH & TRIM AIR COMPRESSOR

PC1280

11/2 HP, 6 GAL. PANCAKE AIR COMPRESSOR



OVERVIEW

PC1010

- · Cast iron cylinder for Framing & sheathing, longer pump life
- Compact twin-stack tank design
- · Direct drive pump & heavy duty induction motor for efficient operation

APPLICATIONS

roofing & decking, finish & trim

> · Oil-free pump for maintenance free operation

Induction motor

for extended life

OVERVIEW

200 Max psi

operation

APPLICATIONS

Framing & sheathing, roofing & decking, finish & trim



OVERVIEW

APPLICATIONS

Finish & trim

- · Compact & balanced pancake tank design
- Lightweight at only 38 lbs
- Dual couplers allow you to run 2 hoses simultaneously
- Draws only 12 amps

PC1010N

½ HP, 1 GAL. FINISH & TRIM AIR COMPRESSOR

PC0947

2" 18 GA. BN31M1P BRAD NAILER & PC1010 COMPRESSOR KIT



1/2 HP, 1 GAL. FINISH & TRIM AIR COMPRESSOR

OVERVIEW

- Ultra-quiet motor runs at 68 dBA
- 20 lbs for optimal portability
- Oil-free pump for maintenance free operation

Connect Coupler

APPLICATIONS

Finish & trim



- Ultra-quiet motor runs at 68 dBA
- 21 lbs for optimal portability
- Oil-free pump for maintenance free operation



Finish & trim

APPLICATIONS

OVERVIEW

- BN31M1P Nailer drives 18- GA. finish nails %" to 21%" in length
- PC1010 motor runs
- fasteners & safety glasses



APPLICATIONS

Finish & trim

at 68 dBA Includes hose,


AIR COMPRESSOR SPECIFICATIONS

MODEL NAME ITEM#	PC1131	PC0968	PC1280	PC1010	PC1010N
Motor	Induction	Induction	Universal	Induction	Induction
Amps	14	8	12	4	4
Power Source	115 Volts	115 Volts	115 Volts	115 Volts	115 Volts
SCFM @ 90 PSI	4.4	2.2	2.8	0.7	0.7
Max PSI	125	135	150	135	135
Weight	60 lbs (27 kg)	38 lbs (17.24 kg)	38 lbs (17.24 kg)	20 lbs (9.07 kg)	21 lbs (9.53 kg)
Height	14.5" (368 mm)	13.5" (343 mm)	18" (457 mm)	13" (330 mm)	12.25" (311 mm)
Length	20.5" (521 mm)	16" (406 mm)	17" (432 mm)	14" (356 mm)	11.5" (292 mm)
Width	16.5" (419 mm)	15" (381 mm)	16.3" (414 mm)	10" (254 mm)	14" (356 mm)
Warranty	1 yr	1 yr	1 yr	1 yr	1 yr
FEATURES					
Thermal Overload Protector	Yes	Yes	Yes	Yes	Yes
Pump	Oil-Lube	Oil-Free	Oil-Free	Oil-Free	Oil-Free
Pump Up/ Recovery Time	67 sec./16 sec.	82 sec./17 sec.	152 sec./33 sec.	125 sec./30 sec.	125 sec./30 sec.
½" Quick	1	1	2 (Dual)	1	1

2 (Dual)

KIT SPECIFICATIONS

KII JELUIFICATIONS				
MODEL NAME ITEM#	PC0947			
Compressor	PC1010			
Tool	BN31M1P			
Trigger	Selectable			
Tool Oper. Pressure	70-120 psi			
Tool Air Inlet	1/4" NPT			
Tool Weight	3 lbs (1.4 kg)			
Tool Height	9.75" (248 mm)			
Tool Length	10.5" (267 mm)			
Kit Warranty	1 yr/5 yr			
Coil Hose	1⁄4" x 25'			
Air Fittings	Yes			
Tool Oil & Safety Glasses	Yes			
Variety Pack of Fasteners	Yes			

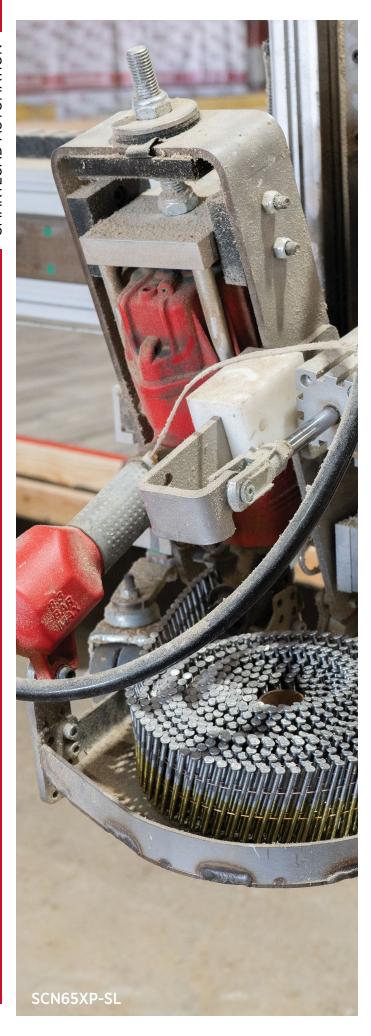

SMARTLOAD AUTOMATION

MOUNTED FRAMING MADE SIMPLE

Fastening solutions that are purpose-built for automated assembly, with extended fastener capacity, reload indicators and a range of remote fire trigger and fastener options. Introducing SENCO's SmartLoad lineup – from the leader in power fastening technology.

WHY WE'RE THE EXPERTS

Our tools, accessories and fasteners have been improving the speed and consistency of manufacturing lines for decades. Moving to automated production? We're ready to help.

APPLICATIONS

Mounted framing, subfloor, wall sheathing, pallets, crating.

KEY FEATURES

- Off-the-shelf framing nailers, coil nailers, triggers and fasteners specifically designed for automation systems
- Dependable fastening performance for machine-driven, high-volume assembly of walls, floors, roofs and other wood construction
- Mount easily to most popular bridge systems

SMARTLOAD AUTOMATION



SENCO

TOOL OVERVIEW

- Drives 30° paper taped framing nails 2" to 3½" in length
- 2X capacity magazine
- Mechanical reload indicator/lock out
- Drives up to 8 nails per second
- Three versions see table*

APPLICATIONS

Mounted framing

APPLICATIONS

Mounted framing

TOOL OVERVIEW

- Drives 15° flat wire welded coil nails 2" to 3½" in length
- High capacity stainless steel tray holds up to 1000-nail coils
- E-Z load design for quick nail loading & less downtime
- Drives up to 9 nails per second
- Includes positive remote fire trigger

APPLICATIONS

Mounted fastening of subfloor, wall sheathing, pallets, crating & framing

FRAMEPRO®752XP-SL SERIES

31/2" 21° SMARTLOAD FRAMING NAILER



TOOL OVERVIEW

- Drives 21° plastic collated framing nails 2" to 3½" in length
- 2X capacity magazine
- Mechanical reload indicator/lock out
- Drives up to 8 nails per second
- · Three versions see table**

*FRAMEPRO®751XP-SL SERIES

TRIGGER TYPE	ITEM#
Standard Safety Mechanism	2J0162N
Pneumatic Reload Indicator	2J0160N
Electronic Reload Indicator	2J0161N

**FRAMEPRO®752XP-SL SERIES

TRIGGER TYPE	ITEM #
Standard Safety Mechanism	2F0162N
Pneumatic Reload Indicator	2F0160N
Electronic Reload Indicator	2F0161N







MODEL NAME ITEM #	FRAMEPRO*751XP-SL ITEM # ABOVE	FRAMEPRO*752XP-SL ITEM # ABOVE	SCN65XP-SL 540160N		
Trigger	Sequential	Sequential	Contact		
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	11 scfm	11 scfm	9.54 scfm		
Air Inlet	³⁄8″ NPT	3⁄₀" NPT	3%" NPT		
Weight	10.3 lbs (4.7 kg)	10.5 lbs (4.7 kg)	10.3 lbs (4.7 kg)		
Height	18.9" (480 mm)	14.785" (375.5 mm)	18.9" (480 mm)		
Length	4.4" (112 mm)	36.855" (936.1 mm)	26.8" (681 mm)		
Width	11" (280 mm)	4.488" (113.9 mm)	4.4" (112 mm)		
Main Body Material	Aluminum	Aluminum	Aluminum		
FASTENERS	FASTENERS FASTENERS ARE LOCATED ON PAGES 38-41				
Range	2"-3½"	2"-3½"	2"-31/2"		
Diameter	.113"148"	.120"162"	.099"131"		
Capacity	70	60	225-275		
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip	15° Flat Wire Welded Coil		

POSITIVE REMOTE FIRE TRIGGERS

SENCO's new lineup of Positive Remote Fire Triggers are designed with simplicity & durability in mind. Suitable for all automated applications where a positive remote trigger is required.

- Routine, direct oiling is not necessary
- Include industrial grade air fittings & any required mounting hardware
- Passed grueling lab testing program of over 1 million cycles without failure
 Designed to require minimal air input ensuring reliable high speed operation

EXTERNAL TRIGGER ACTUATORS					
Tool	Description	Cat. Pg. #	Item #		
FramePro®701XP	3½" Paper Tape Framing Nailer	33			
FramePro®702XP	3½" Full Round Head Framing Nailer	34	CA0191		
FramePro®751XP	3½" Paper Taped Framing Nailer	33			
FramePro®752XP	3½" Full Round Head Framing Nailer	34			



EXTERNAL VALVE ACTUATORS				
Tool	Description	Cat. Pg. #	Item #	
SLS20XP-HF	³ / ₆ " Crown, 1" Hardwood & Laminate Floor Stapler	66		
SLS20XP-K	1/4" Crown, 11/8" Finish Stapler	22		
SLS20XP-L	¼" Crown, 1½" Finish Stapler	22		
SLS20XP-L SENCOMATIC	¼" Crown, 1½" Finish Stapler 22		HA0362	
SLS20XP-M	3%" Crown, 1½" Finish Stapler	22	11AU302	
SLS20XP-R	¾6" Crown, 1¼" Finish Stapler	22		
SLS25XP-L	¼" Crown, 1½" Finish Stapler	22		
SLS25XP-M	3%" Crown, 1½" Finish Stapler	22		
SNS50XP	7/16" Crown, 2" Construction Stapler	39	HA0363	
SQS55XP	⅓6" Crown, 2½" Construction Stapler	39	паозоз	
LS1XP	1" Headless Brad Nailer	19	HA0368	
SLP20XP	1%" Brad Nailer	20	паозоо	
SFT10XP A/D-Wire Stapler	¾6" Crown, ¾" Fine Wire Stapler	61		
SFT10XP B-Wire DL Stapler	½" Crown, ½" Fine Wire Stapler	61		
SFT10XP B-Wire Stapler	½" Crown, ½" Fine Wire Stapler	61		
SFT10XP C-Wire DL Stapler	3%" Crown, 5%" Fine Wire Stapler	61		
SFT10XP C-Wire LN Stapler	3%" Crown, 5%" Fine Wire Stapler	61	XA211	
SFT10XP C-Wire Stapler	3%" Crown, 5%" Fine Wire Stapler	61	AAZII	
SFT10XP E-Wire Stapler	¾6" Crown, ¾" Fine Wire Stapler	61		
SFT10XP F-Wire Stapler	½" Crown, %" Fine Wire Stapler	61		
SFT10XP G-Wire DL Stapler	3%" Crown, 5%" Fine Wire Stapler	61		
SFT10XP G-Wire Stapler	¾" Crown, ¾" Fine Wire Stapler	61		






HA0363



HA0368



XA211










SMOOTH SHANK HIGH LOAD COIL NAILS

MOUNTED FASTENING OF SUBFLOOR, WALL SHEATHING, PALLETS, CRATING & FRAMING								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2½"	0.131"	Bright	Diamond	Sencoat	15° Angled Wire Coil	2400	KD25APBP	
3"	0.131"	Bright	Diamond	Sencoat	15° Angled Wire Coil	2400	KD27APBP	
								S









15°


RING SHANK HIGH LOAD COIL NAILS

MOUNTED FASTENING OF SUBFLOOR, WALL SHEATHING, PALLETS, CRATING & FRAMING								
Length	Diameter	Finish	Point	Coating	Collation	Count	Item Code	Compatible With
2"	0.99"	Bright	Diamond	Sencoat	15° Angled Wire Coil	1000	BT21APBP	
23/8"	0.113"	Bright	Diamond	Sencoat	15° Angled Wire Coil	1000	GT24APBP	
								SC











ACCESSORIES

FILTERS, REGULATORS, LUBRICANTS, PLUGS, COUPLERS, HOSES, PARTS KITS & MORE

SENCO offers an assortment of accessories that are precision engineered to meet the demanding requirements of professionals. Be sure that your tools and compressors are running at peak performance by using SENCO certified replacement parts, accessories, hoses, oils and lubricants.

AIR HOSES

QUICK COUPLE RUBBER HOSE

SENCO'S PREMIUM AIR HOSES:

- Can handle up to 250 psi working pressure
- Oil-resistant nitrile tube
- Braided textile reinforcing for maximum strength & kink resistance
- \bullet Remains flexible at temperatures from -40° to 200°F
- 4-to-1 working pressure to burst safety factor
- Tough, flexible neoprene cover

Description	Hose Size	Length	Qty.	ITEM#
Gray with Industrial Interchange Plug & Coupler Fittings	1/4"	50 ft	1	PC0064
Gray with Industrial Interchange Plug & Coupler Fittings	1/4"	100 ft	1	PC1152
Gray with Industrial Interchange Plug & Coupler Fittings	3/8"	50 ft	1	PC0065



& COUPLER PC0064, PC1152, PC0065

PROFLEX™ REINFORCED POLYURETHANE RED AIR HOSE

LIGHTEST AVAILABLE NON-MARRING FLEXIBLE HOSE

- Flexible in all weather (-48° to 150°F)
- Working pressure: 250 psi

- Durable oil & fuel resistant
- MPT threaded ends

Description	Hose Size	Length	Qty.	ITEM#
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC0977
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC0978
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	3/8"	50 ft	1	PC0979



PROFLEX WITH MPT ENDS PC0977, PC0978, PC0979

PREMIUM HYBRID POLYMER AIR HOSE

- Provides the ultimate in flexibility & memory resistance, even in extreme cold
 Offers the best combination of strength & flexibility on the market

Description	Hose Size	Length	Qty.	ITEM #
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC1319
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC1320
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1/4"	50 ft	1	PC1321
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1/4"	100 ft	1	PC1322
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	3/8"	50 ft	1	PC1339



HYBRID WITH MPT ENDS PC1319, PC1320

FIELD REPAIRABLE END FITTING

· Field repairable hose ends are made with aircraft aluminum for easy on-site repair without hose clamps

Description	Hose Size	Qty.	ITEM #
Hybrid Hose Repair End Fitting	1/4"	1	PC1341
Hybrid Hose Repair End Fitting	3/8"	1	PC1337
Hybrid Hose Splicer	1/4"	1	PC1338
Hybrid Hose Splicer	3/8"	1	PC1340



HYBRID HOSE REPAIR END FITTING & HOSE **SPLICER**

PLUGS & COUPLERS

Quick connect plugs & couplers are available in the most popular Industrial Interchange styles. Couplers are also available in universal style.

UNIVERSAL COUPLERS — PUSH PLUG INTO COUPLER (NO NEED TO PULL BACK ON SLEEVE)						
Type	Body Size	NPT Size	Pack Qty.	ITEM #		
Female	1/4"	1/4" FPT	1	PC0900		

FE	MALE COUPLER PC0900

PLUGS — INDUSTRIAL INTERCHANGE					
Туре	Body Size	Size	Pack Qty.	ITEM#	
Male	1/4"	1/4" MPT	2	PC0479	
Male	1/4"	¾" MPT	2	PC0480	
Female	1/4"	1/4" FPT	2	PC0477	
Female	1/4"	3/8" FPT	2	PC0478	
Push-on Barb	1/4"	1/4" LHB	1	PC0576	
Push-on Barb	1/4"	3%" LHB	1	PC0577	





MALE PLUG PC0479, PC0480

FEMALE PLUG PC0477, PC0478

COUPLERS — INDUSTRIAL INTERCHANGE						
Туре	Body Size	Size	Pack Qty.	ITEM #		
Male	1/4"	1/4" MPT	1	PC0503		
Male	1/4"	3/8" MPT	1	PC0504		
Female	1/4"	1⁄4" FPT	1	PC0501		
Female	1/4"	3/8" FPT	1	PC0502		
Push-on Barb	1/4"	1/4" LHB	1	PC0505		
Push-on Barb	1/4"	¾" LHB	1	PC0506		



PLUG (PUSH-ON LOCKING BARB) PC0576, PC0577



MALE COUPLER PC0503, PC504



FEMALE COUPLER PC0501, PC0502



(PUSH-ON LOCKING BARB) PC0505, PC0506

SWIVEL PLUGS & SWIVEL COUPLERS

• Allow easier access when working in corners & tight spaces • Help prevent kinks & reduce stress on hose

1/4"

- Reduce fatigue

2

• Provide strong & simple connection for pneumatic tools

PC1325

PC1328

SWIVEL PLUGS — INDUSTRIAL INTERCHANGE						
Туре	Body Size	NPT Size	Pack Qty.	ITEM#		
Male	1/4"	1/4" MPT	2	PC1323		

3/8" MPT

MALE SWI\ PLUG	/EI

SWIVEL PLUGS — IN	DUSTRIAL INTERCHAN	GE		
Type	Body Size	NPT Size	Pack Qtv.	ITEM#

1/4" FPT



FEMALE SWIVEL
COUPLER
PC1328

SWIVEL COUPLERS — UNIVERSAL					
Type	Body Size	NPT Size	Pack Qty.	ITEM #	
Female	1/4"	1/4" FPT	1	PC1330	



Male

Female

AIR HOSE ACCESSORIES

SPLICER						
Description	Size	Pack Qty.	ITEM #			
Push-On Barbed Hose Splicer	1/4" LHB	2	PC0643			

PROFLEX™ HOSE FITTINGS						
Description	Size	Pack Qty.	ITEM #			
Brass Hose End	1/4" MPT	1	PC0983			
Brass Hose End & Splicer	1/4" MPT	1	PC0987			









BRASS HOSE END & SPLICER PC0987

AIR HOSE & COMPRESSOR ACCESSORIES

TRIPOD MANIFOLD				
Description	Inlet Thread	Outlet Thread	Pack Qty.	ITEM #
3-Way Flat Manifold Industrial Interchange	1/4" Plug	¼" Coupler	1	PC1138

BLOW GUN			
Description	Inlet Thread	Pack Qty.	ITEM #
Air Blow Gun	1/4" FPT	1	PC0489

TEFLON® THREAD SEALING TAPE					
Description	Pack Qty.	ITEM #			
½" x 260' Sealing Tape	1	PC0349			





AIR BLOW GUN PC0489



REGULATORS & GAUGES

SENCO's assortment of filters & gauges are precision engineered to meet the demanding requirements of professional contractors. Be sure that your compressor is running at peak performance by using SENCO-certified replacement parts & accessories.

AIR REGULATION ACCESSORIES: REGULATOR WITH GAUGE					
Description	Max PSI	Max Airflow	FPT Size	NPT Gauge	ITEM #
Mini Regulator with Gauge	250	14 SCFM	1/4"	1/8"	PC0656
Regulator with Gauge	300	80 SCFM	3/8"	1/8"	PC0657
Back-Mount Pressure Gauge	160	_	_	1/8"	PC0057
Back-Mount Pressure Gauge	160	_	_	1/4"	PC0051



MINI REGULATOR WITH GAUGE PC0656



REGULATOR WITH GAUGE PC0657



BACK-MOUNT PRESSURE GAUGE PC0057



PC0051

(FPT) - Female Pipe Thread

⁽MPT) - Male Pipe Thread

⁽LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose

OILS & LUBRICANTS

OILS & LUBRICANTS				
Description	Overview	Size	Case Qty.	ITEM#
Pneumatic Tool Oil (½ pt)	Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust & oxidation inhibitor with an effective anti-foaming additive	8 oz	12	PC0101
Pneumatic Tool Oil (1 qt)	Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust & oxidation inhibitor with an effective anti-foaming additive	32 oz	12	PC0102
Pneumatic Tool Oil (1 gal)	Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust & oxidation inhibitor with an effective anti-foaming additive	128 oz	4	PC0103
Compressor Pump Oil (1 qt)	Premium-grade oil with high-quality naphthenic distillate stock Recommended for all oil-splash compressors Protects against corrosion Lubricates to extend part life	32 oz	12	PC0344
Moisture Shield Tool Lubricant (1 qt)	For use in cold weather &/or high-moisture areas Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog	32 oz	12	PC1295
Tool Lubricant	Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog	4 oz	12	YB0123



½ PT. PC0101



1 QT. PC0102



COMPRESSOR PUMP OIL 1 GAL. PC0103 PC0344





MOISTURE SHIELD TOOL LUBRICANT PC1295

TOOL LUBRICANT YB0123

SAFETY GLASSES

SAFETY GLASSES			
Description	Overview	Qty.	ITEM #
Wrap-Around Safety Glasses	Filters 99% of UVA & UVB rays Meets or exceeds ANSI Z87.1 & CE EN 166 safety standards For indoor & outdoor use	10-Case	PC1166



TOOL BELT HOOKS

TOOL BELT HOOKS						
Description	Size	Qty.	ITEM #			
Attaches to ¼" Air Fitting on Tool	Standard	1	PC0350			
Attaches to ¼" Air Fitting on Tool	X-Wide	1	PC0629			
Attaches to 3%" Air Fitting on Tool	Standard	1	PC0351			
Attaches to 3/8" Air Fitting on Tool	X-Wide	1	PC0630			



PC0630

EXTENDED LENGTH MAGAZINES

EXTENDED LENGTH MAGAZINES FOR CORDLESS PNEUMATIC FRAMERS		
Tool	ITEM #	
F-35XP	GA0767	
F-35FRHXP	GA0778	





LI-ION BATTERIES

FOR USE WITH 18V LI-ION CORDLESS SCREWDRIVERS & CORDLESS PNEUMATIC TOOLS			
Description	Overview	ITEM #	Compatible With
18V Li-Ion Battery 2.0 amp hour	High-quality reliable cells Charges to 50% in less than 20 minutes & 100% in less than 60 minutes	VB0212	•••••
18V Li-Ion Battery 4.0 amp hour	State of the art 21700 cells Charges to 50% in less than 20 minutes & 100% in less than 60 minutes	VB0210*	•••••

^{*}For optimal performance only use the VB210 battery with the F-35XP & F-35FRHXP

DS222-18V	DS225-18V	DS322-18V	F-15XP	F-16XP	F-18XP	F-LXP	F-35XP*	F-35FRHXP*
-----------	-----------	-----------	--------	--------	--------	-------	---------	------------



2 AMP HOUR VB0212



4 AMP HOUR VB0210

BATTERY CHARGER

R USE WITH SENC	D BATTERIES		
Description	Overview	ITEM #	Compatible With
attery Charger	• 5 amp quick charger • Upright design for wall mounting	VB0189	• •
	'		VB0210 VB0212
			/B0210 /B0212



REPLACEMENT NO-MAR PADS

One pad per pack

REPLACEMENT NO-MAR PADS	
For	ITEM#
AF25, CF25	HF0064
AF41, CF41	HF0079
FIP11	HC0463
FIP15, FIP18	HC0506
FIP15Mg, BN31M1P	HC0571
FIP23SXP, 23LXP, 21LXP	HC0729
FIP25XP	HF0064
FIP32**	HC0401
FIP41XP, FIP42XP	HF0079
FN55AX	HF0113
FN65DA	HF0110
FP600-650 SERIES	HF0046, HC0253
FP601, FP602, FP651, FP652	HA0170

^{**}Refer to parts chart to identify desired safety element design

REPLACEMENT NO-MAR PADS

One pad per pack

REPLACEMENT NO-MAR PADS	
For	ITEM #
FP700 SERIES	HF0046, HC0253
GT65DA	HF0064
GT65RHA	HF0079
GT90CH	HC0463
GT90FRH	HC0506
SCN49	HC0571
SFN30, SFN40, SFNI	HC0729
SLS15, SLS18	HF0064
SLS15Mg, LS61H1P	HC0396
SLS20, SLS20XP (K, L & R CROWNS)	HC0401
SLS20, SLS20XP (M CROWN)	HF0079
SLS25-L, SLS25XP-L	HF0113



TOOL MAINTENANCE

SENCO repair kits are designed to provide the parts normally needed to properly maintain & service your tools. Be sure to visit www.senco.com/parts-service/ to see a complete list of tool manuals, parts charts & much more.





TOOL MODEL	DESCRIPTION	ITEM CODE
BN31M1P	Repair Kit	YK0908
BN31M1P	Repair Kit	YK0780
FinishPro™18Mg	Repair Kit	YK0393
FinishPro™18BMg	Repair Kit	YK0868
FinishPro™21LXP	Repair Kit	YK0855
FinishPro™23LXP	Repair Kit	YK0855
FinishPro™23SXP	Repair Kit	YK0854
FinishPro™25XP	Firing System Kit	YK0281
FinishPro™25XP	Piston Stop Kit	YK0282
FinishPro™42XP	Firing System Kit	YK0361
FinishPro™42XP	Piston Stop Kit	YK0362
FN81T1	Repair Kit	YK0894
FN81T1	Repair Kit	YK0893
FN91T1	Repair Kit	YK0894
FN91T1	Repair Kit	YK0893
FramePro™325FRHXP	Firing System Kit	YK0444
FramePro™325FRHXP	Piston Stop Kit	YK0444
FramePro™325XP	Firing System Kit	YK0444
FramePro™325XP		YK0444
	Piston Stop Kit	
FramePro™701XP	Firing System Kit	YK0243
FramePro™701XP	Piston Stop Kit	YK0244
FramePro™702XP	Firing System Kit	YK0243
FramePro™702XP	Piston Stop Kit	YK0244
FramePro™751XP, FramePro™751XP-SL	Firing System Kit	YK0243
FramePro™751XP, FramePro™751XP-SL	Piston Stop Kit	YK0244
FramePro™752XP, FramePro™752XP-SL	Firing System Kit	YK0243
FramePro™752XP, FramePro™752XP-SL	Piston Stop Kit	YK0244
JN91H1	Repair Kit	YK0895
JN91H1	Repair Kit	YK0896
JN91H2	Repair Kit	YK0895
JN91H2	Repair Kit	YK0896
JN91P1	Repair Kit	YK0898
JN91P1	Repair Kit	YK0899
JN91P2	Repair Kit	YK0898
JN91P2	Repair Kit	YK0899
JoistPro™150XP	Firing System Kit	YK0823
JoistPro™150XP	Piston Stop Kit	YK0824
JoistPro™250XP	Firing System Kit	YK0825
JoistPro™250XP	Piston Stop Kit	YK0826
JoistPro™150XP	Safety Upgrade Kit	YK0869
LS1XP	Repair Kit	YK0858
LS61H1P	Repair Kit	YK0908
LS61H1P	Repair Kit	YK0780
NS20BXP	Firing System Kit	YK0838
NS20BXP	Piston Stop Kit	YK0839
NS20XP	Firing System Kit	YK0840
NS20XP	Piston Stop Kit	YK0841
NS20XP	Siding Safety Kit	HC0788
PAL57FXP	Repair Kit	YK0446
	Retrofit Kit - Solid Safety	YJ0049
PS15RXP		

PARTS KITS

PARISKIIS		
TOOL MODEL	DESCRIPTION	ITEM CODE
PS15RXP	Repair Kit	YK0818
PS15RXP	Block Out Kit	YK886
PS15RXP	Repair Kit	YK0783
PS15XP	Repair Kit	YK0784
PS15XP	Repair Kit	YK0818
PS15XP	Block Out Kit	YK886
PS15XP	Repair Kit	YK0783
PS20XP	Repair Kit	YK0783
RoofPro™ 445XP*	Wear Guard Kit	YK0870
RoofPro™ 445XP*	Gate Repair Kit	YK0871
RoofPro™445XP*	Repair Kit	YK0903
SC 1	Repair Kit	YK0370
SC 2	Repair Kit	YK0371
SCN49XP	Repair Kit	YK0771
SCN60XP	Seal Kit	YK0366
SCN65XP, SCN65XP-SL	Seal Kit	YK0366
SCP40XP	Firing System Kit	YK0444
SCP40XP	Piston Stop Kit	YK0445
SFT10XP	Piston Stop Kit	YK0802
SFT10XP	Firing System Kit	YK0803
SFT10XP (AUTO D/L)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Piston Stop Kit	YK0802
SFT10XP (AUTO)	Firing System Kit	YK0804
SFT10XP D/L	Piston Stop Kit	YK0802
SFT10XP D/L LN	Firing System Kit	YK0803
SFT10XP LN	Piston Stop Kit	YK0802
SFTIOXP LN	Firing System Kit	YK0803
SFW09	Repair Kit	YK0775
SKS	Repair Kit	YK0376
SKS	Retrofit Kit	YJ0035
SKSXP		YK0804
SLP20XP	Firing System Kit Repair Kit	YK0373
SLS150Mg	Repair Kit	YK0852
SLS150frig SLS15Mg	Repair Kit	YK0780
SLS20XP	Repair Kit	YK0372
SLS25XP	Piston Stop Kit	YK0291
SLS25XP	Firing System Kit	YK0359
SN71P1	Repair Kit Repair Kit	YK0897
SNS41		YK0423 YK0794
SNS41	Driver/Back Plate Upgrade	
SNS41 (Retrofit Kit)	Cap/Firing Valve Piston Stop Kit	YJ0034
SNS45XP		YK0231
SNS50XP	Seal Kit	YK0375
SQS55XP	Seal Kit	YK0375
TN 21L1	Repair Kit	YK0889
TNIIGI	Repair Kit	YK0888
TN11G1P	Repair Kit	YK0910
TN11L1	Repair Kit	YK0889
TN41P1P	Repair Kit A	YK0906
TN41P1P	Repair Kit B	YK0907
TN51P1P	Repair Kit	YK0905

DURASPIN COLLATED SCREWDRIVERS

MODEL	ITEM#	PAGE
DS222-18V - 2" 2500 RPM Cordless Collated Screwdriver	10B0002N	3
DS225-18V - 2" 5000 RPM Cordless Collated Screwdriver	10A0002N	3
DS242-AC - 2" 120V 2500 RPM Collated Screwdriver	10E0001N	4
DS245-AC - 2" 120V 5000 RPM Collated Screwdriver	10D0001N	4
DS322-18V - 3" 2500 RPM Cordless Collated Screwdriver	10C0002N	3
DS342-AC - 3" 120V 2500 RPM Collated Screwdriver	10F0001N	4

DURASPIN ATTACHMENTS & KITS

MODEL	ITEM#	PAGE
DS230-D1 - 2" Collated Screwdriver Attachment	9Z0011N	6
DS230-D2 - 2" Collated Screwdriver Attachment	9Z0012N	6
DS230-M1 - 2" Collated Screwdriver Attachment	9Z0021N	6
DS230-S1 - 2" Collated Screwdriver Attachment	9Z0001N	6
DS530-D1 - 3" Collated Screwdriver Attachment	10X0012N	7
DS530-M1 - 3" Collated Screwdriver Attachment	10X0022N	7
DS530-S1 - 3" Collated Screwdriver Attachment	10X0002N	7
DS532-AC - 3" 2500 RPM Screwdriver & Attachment Kit	10X0003N	5
DS534-AC - 3" 4000 RPM Screwdriver & Attachment Kit	10X0013N	5
SG2510 - High Performance 2500 RPM Screwdriver	6X0002N	5
SG4100 - High Performance 4000 RPM Screwdriver	6X0004N	5

PNEUMATIC TOOLS

MODEL	ITEM#	PAGE
A11 - 20 GA. 7/6" Crown, 3/8" Hammer Stapler	PC0700	48
A20 - 7" Bulk Nailer	PC0781	33
BC58 - ½" Crown 5/4" Staple & 1" Cap Stapler	4A0001N	48
BN31M1P - 21/8" 18 GA. Brad Nailer	BN31M1P	17
DFPXP - 20 GA. ½" Crown, ½" Staple Clinch Tool	8H0001N	54
F-15XP - 2½" 15 GA. Cordless Finish Nailer	10L0001N	15
F-16XP - 2½" 16 GA. Cordless Finish Nailer	10N0001N	15
F-18XP - 21/8" 18 GA. Cordless Brad Nailer	10M0001N	15
F-35FRHXP - 31/2" 21° Cordless Plastic Collated Framing Nailer	10H0002N	29
F-35XP - 3½" 30° Cordless Paper Tape Framing Nailer	10G0002N	29
F75LXP - 18 GA. 7/16" Crown, 5/8" Staple Clinch Tool	8J0002N	54
F75SXP - 18 GA. 7/16" Crown, 5/8" Staple Sisal Anvil	8J0001N	54
FinishPro®25XP - 21/8" 18 GA. Brad Nailer	760102N	18
FinishPro®30XP - 2" 15 GA. Angled Finish Nailer	9P0002N	19
FinishPro®42XP - 2½" 15 GA. Angled Finish Nailer	4G0001N	19
F-LXP - 18 GA. ¼" Crown, 1½" Cordless Finish Stapler	10Y0001N	15
FN81T1 - 3½" 21° Full Round Head Framing Nailer	FN81T1	30
FN91T1 - 3½" 30° Paper Tape Framing Nailer	FN91T1	30
FramePro*325FRHXP - 3¼" 21° Full Round Head Framing Nailer	4H0101N	32
FramePro®325XP - 3¼" 30° Paper Tape Framing Nailer	4Z0101N	31
FramePro*701XP - 3½" 30° Paper Tape Framing Nailer	2H0133N	31
FramePro*702XP - 3½" 21° Full Round Head Framing Nailer	2K0103N	32
FramePro*751XP - 3½" 30° Paper Tape Framing Nailer	2J0103N	31
FramePro*751XP-SL - 3½" 30° Smartload Framing Nailer	2J0160N	69
FramePro®751XP-SL - 3½" 30° SmartLoad Framing Nailer	2J0161N	69
FramePro*751XP-SL - 3½" 30° SmartLoad Framing Nailer	2J0162N	69
FramePro*752XP - 3½" 21° Full Round Head Framing Nailer	2F0103N	32
FramePro*752XP-SL - 3½" 21° SmartLoad Framing Nailer	2F0160N	69
FramePro*752XP-SL - 3½" 21° SmartLoad Framing Nailer	2F0161N	69
FramePro*752XP-SL - 3½" 21° SmartLoad Framing Nailer	2F0162N	69
JN91H1 - 1½" Metal Connector Nailer	JN91H1	34
JN91H2 - 1½" Metal Connector Nailer with Extended Magazine	JN91H2	34
JN91P1 - 2½" Metal Connector Nailer	JN91P1	34
JN91P2 - 21/2" Metal Connector Nailer with Extended Magazine	JN91P2	34
LS1XP - 1" 18 GA. Headless Brad Nailer	8N0001N	17
LS61H1P - 18 GA. ¼" Crown, 1½" Finish Stapler	LS61H1P	21
NS20BXP - 16 GA. 7/16" Crown, 2" Construction Stapler	9Y0001N	36, 60
NS20XP - 16 GA. 7/16" Crown, 2" Construction Stapler	NS20XP	36
PalletPro™57FXP - 2¼" 15° Coil Nailer	4L0001N	53
PalletPro™100XP - 4" 15° Coil Nailer (Special Order Tool)	5L0001N	53
PalletPro™130XP - 5½" 15° Coil Nailer (Special Order Tool)	5M0001N	53
PC1195 - 3½" Bulk Nailer	PC1195	33
PS15RXP - 16 GA. 1" Wide Crown, 1½" Roofing Stapler	9U0001N	48
PS15XP - 16 GA. 1" Wide Crown, 1½" Construction Stapler	9T0001N	35
PS20XP - 16 GA. 1" Wide Crown, 2" Construction Stapler	9W0001N	35
RoofPro™445XP - 1¾" Coil Nailer	8V0001N	47
SC1XP Senclamp* - 7/16" Crown, 9/6" 25 GA. Senclamp* Fastener	220101N	21
SC2 Sencor® - 1" Crown, ½" 25 GA. Corrugated Fastener	470001N	21
SCN60XP - 2¾" 15° Coil Nailer	520101N	33
SCN65XP - 31/2" 15° Coil Nailer, Flat Safety	540101N	33
SCN65XP - 3½" 15° Coil Nailer, Toenail Safety	540104N	33

PNEUMATIC TOOLS (CONTINUED)

MODEL	ITEM#	PAGE
SCN65XP-SL - 31/2" 15° Smartload Coil Nailer	540160N	69
SCP40XP - 1½" Pneumatic Concrete & Steel Pinner	7J0009N	35
SFT10XP - 22 GA. 3/16" Crown, 5/8" Fine Wire Stapler-Standard	6S0001N	59
SFT10XP - 22 GA. ½" Crown, %" Fine Wire Stapler-Standard	6S0011N	59
SFT10XP - 22 GA. 3/8" Crown, 5/8" Fine Wire Stapler-Standard	6S0021N	59
SFT10XP - 20 GA. 3/6" Crown, 5/6" Fine Wire Stapler-Standard	6S0031N	59
SFT10XP - 20 GA ½" Crown, 5%" Fine Wire Stapler-Standard	6S0041N	59
SFT10XP - 20 GA. 3/6" Crown, 5/6" Fine Wire Stapler-Standard	6S0051N	59
SFT10XP - 22 GA. 3/16" Crown, 5/1" Fine Wire Stapler-Auto	6S0101N	59
SFT10XP - 22 GA. 3/8" Crown, 5/8" Fine Wire Stapler-Auto	6S0121N	59
SFT10XP - 22 GA. 3/4"Crown, 5/4" Fine Wire Dbl. Length Mag. Stapler-Standard	6S0221N	59
SFT10XP - 20 GA. 3/6" Crown, 5/6" Fine Wire Dbl. Length Mag. Stapler-Standard	6S0251N	59
SFT10XP - 22 GA. ½" Crown, %" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0311N	59
SFT10XP - 22 GA. 3/8" Crown, 5/8" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0321N	59
SFT10XP - 20 GA. 1/2" Crown, 5%" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0341N	59
SFT10XP - 20 GA. 7/6" Crown, 5/8" Fine Wire Dbl. Length Mag. Stapler-Auto	6S0361N	59
SFT10XP - 22 GA. 3/8" Crown, 5/8" Fine Wire Long Nose Stapler-Standard	6S0421N	59
SFW09 - 22 GA. 3/8" Crown, 5/8" Upholstery Stapler	4C0001N	60
SHF200 - 2" Pneu. Mallet Actuated Hardwood Flooring Cleat Nailer	8D0001N	64
SKSXP-L - 18 GA. ¼" Crown, 1½" Finish Stapler	300120N	20
SKSXP-M - 18 GA. 3/8" Crown, 11/2" Finish Stapler	300152N	20
SKSXP-N - 16 GA. 7/16" Crown, 11/2" Finish Stapler	300184N	20
SLP20XP - 1%" 18 GA. Brad Nailer	430101N	18
SLS20XP-HF - 19 GA. 3/16" Crown, 1" Hardwood & Laminate Floor Stapler	490021N	64
SLS20XP-K - 19 GA. ¼" Crown, 1½" Finish Stapler	490101N	20
SLS20XP-L - 18 GA. ¼" Crown, 1½" Finish Stapler	490103N	20
SLS20XP-L SENCOMATIC - 18 GA. ¼" Crown, 1½" Finish Stapler	490015N	20
SLS20XP-L w/Case - 18 GA. ¼" Crown, 1½" Finish Stapler	490105N	20
SLS20XP-M - 18 GA. 3/4" Crown, 11/2" Finish Stapler	490107N	20
SLS20XP-R - 19 GA. 3/6" Crown, 11/2" Finish Stapler	490111N	20
SLS25XP-L - 18 GA. ¼" Crown, 1½" Finish Stapler	820103N	20
SLS25XP-M - 18 GA. 3/8" Crown, 11/2" Finish Stapler	820107N	20
SN71P1 - 2½" 15° Coil Siding Nailer	SN71P1	47
SNS41 - 16 GA. 7/16" Crown, 2" Construction Stapler	3L0003N	36
SNS45XP - 16 GA. 7/16" Crown, 2" Construction Stapler	580101N	37, 60
SNS50XP - 16 GA. 7/16" Crown, 2" Construction Stapler	750101N	37, 60
SQS55XP - 15 GA. 7/16" Crown, 21/2" Construction Stapler	660101N	37
TN11G1 - 1%" 23 GA. Pinner	TN11G1	16
TN11G1P - 13/8" 23 GA. Pinner	TN11G1P	16
TN11L1 - 2" 23 GA. Pinner	TN11L1	16
TN21L1 - 2" 21 GA. Pinner	TN21L1	17
TN41P1P - 2½" 16 GA. Finish Nailer	TN41P1P	18
TN51P1P - 2½" 15 GA. Finish Nailer	TN51P1P	19

AIR COMPRESSORS & KIT

MODEL	ITEM#	PAGE
PC0947 - 2" FinishPro*18 Brad Nailer & PC1010 Compressor Kit	PC0947	67
PC0968 - 1 HP, 21/2 Gal. Twin Tank Finish & Trim Air Compressor	PC0968	67
PC1010 - ½ HP, 1 Gal. Finish & Trim Air Compressor	PC1010	67
PC1010N - ½ HP, 1 Gal. Finish & Trim Air Compressor	PC1010N	67
PC1131 - 2 HP, 4.3 Gal. Twin Tank Air Compressor	PC1131	67
PC1280 - 1½ HP, 6 Gal. Pancake Air Compressor	PC1280	67



AU C (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
A109809R	24	1080	22
1209809R 1209909R	32	1152	23
	24	768	23
AX10EAA	16	480	23
AXIIEAA	16 32	480 1152	23
AX11EAAR			23
AX13EAA	10	300	23
AX13EAAR	32	1152	23
AX15EAA	10	300	23
AX15EAAR	32	1152	23
AX17EAA	8	240	23
AX17EAAR	24	768	23
AX18EAA	8	240	23
AX19EAA	6	180	23
AX21EAAN	6	180	23
AX21EAAR	24	768	23
AX22EAAN	6	180	23
X22EAAR	24	768	23
Y10EAA	16	480	23
Y11EAA	16	480	23
AY13EAA	10	300	23
AZ07EAA	32	960	23
AZ08EAA	32	960	23
AZ11EAA	24	720	23
AZ13EAA	16	480	23
BD17APBC	N/A*	30	49
BE23AABF	N/A*	45	42, 56
G17AAAQ	N/A*	40	43
BG18AAAQ	N/A*	40	43
BK21BPBFN	N/A*	35	43, 57
	-		
3K23BPBFN	N/A*	35	43, 57
K25BPBFN	N/A*	35	43, 57
L21APBF	N/A*	45	42, 56
T21APBF	N/A*	45	42, 56
T21APBP	N/A*	24	71
ZO8EAAN	N/A*	140	22
Z08EAAR	24	1080	22
Z10EAA	24	1440	22
Z10EAAN	N/A*	140	22
Z10EAAR	24	1080	22
Z11EAA	24	1152	22
Z11EAAN	N/A*	140	22
Z11EAAR	24	1080	22
Z13EAA	12	720	22
Z13EAAR	24	1080	22
Z15EAA	12	720	22
Z15EAAR	24	1080	22
Z16EAA	12	720	22
	24		
Z16EAAR		1080	22
Z17EAA	12	720	22
Z17EAAR	24	960	22
CZ21EAA	12	576	22
Z21EAAR	24	960	22
A13EABR	18	504	24
A13EPBN	5	200	24
A13EPBR	18	504	24
DA15AIA	5	200	24
A15EABN	5	200	24
A15EABR	18	504	24
A15EPBN	5	200	24
A15EPBR	18	504	24
A17AIA	5	200	24
A17EABN	5	200	24
A17EABR	18	504	24
A17EABR A17EPBN		200	24
	5		
A17EPBR	18	504	24
A19AIA	4	160	24
A19EABN	4	160	24
A19EABR	15	420	24
A19EPBN	4	160	24
A19EPBR	15	420	24
A21EABN	4	160	24
A21EABR	15	420	24
DA21EGBR	15	420	24
DA21EOBN	4	160	24
DAZIEPBN DA21EPBR	15		24
		420	
A23EPBN	3	120	24
A25EAB	3	120	24

	CONTIN	OLD)	
ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
DA25EGBR	12	336	24
DA25EPB	3	120	24
DA25EPBR	12	336	24
ED23AABH	N/A*	60	49, 55
EJ23ASBC	N/A*	24	49
EL19AGBH	N/A*	60	50, 55
EL19ASBH	N/A*	60	50, 55
EL20AABH	N/A*	60	50, 55
EL20ASBH	N/A*	60	50, 55
EL21AGBH	N/A*	60	50, 55
EL21ASBH	N/A*	60	50, 55
EL23AABH	N/A*	60	50, 55
EL23AGBH	N/A*	60	50, 55
EL23ASBC	N/A*	24	50
EL23ASBH	N/A*	60	50, 55
G624ASBXNR	4	192	39
GC21APBX	N/A*	80	38
GC23AHAK	N/A*	80	40
GC24APBX	N/A*	72	38
GC24ASBX	N/A*	72	38
GC25APBX	N/A*	72	38
GD21AABF	N/A*	40	42, 55
GD21APBF	N/A*	40	42, 55
GD24APBSN	N/A*	48	41
GD24ASBS	N/A*	45	41
GD25AABF	N/A*	40	42, 55
GD25AABSN	N/A*	48	41
GD25APBF	N/A*	40	42, 55
GD25APBSN	N/A*	48	41
GE21APAX	N/A*	80	39
GE21ASBX	N/A*	80	39
GE24AGBK	N/A*	80	40
GE24APBX	N/A*	72	39
GE24ASBX	N/A*	72	39
GL21APBF	N/A*	40	
GL21APBSN	-	48	42, 56 41
	N/A*		
GL21ASBS	N/A*	45	41
GL24AABSN	N/A*	48	41
GL24AGBF	N/A*	24	42, 56
GL24AGBS	N/A*	72	41
GL24APBF	N/A*	40	42, 56
GL24APBSN	N/A*	48	41
GL24ASBF	N/A*	40	42, 56
GL24ASBS	N/A*	45	41
GL24ASBSNR	4	192	41
GT24APBF	N/A*	40	42, 56
GT24APBP	N/A*	48	71
H527APBXNR	3	120	38
H627ASBXNR	3	120	39
HC27APBX	N/A*	48	38
HC27ASBX	N/A*	48	38
HC28APBX	N/A*	48	38
HD27APBF	N/A*	40	42, 55
HD27APBSN	N/A*	48	41
HE27APBXN	N/A*	48	39
HE27ASBX	N/A*	48	39
HF27EDB	N/A*	80	40
HF27EPAK	N/A*	40	40
HK27APBFN	N/A*	35	43, 57
HL27AGBS	N/A*	54	41
HL27ASBF	N/A*	40	42, 56
HL27ASBS	N/A*	40	41
HR22APAF	N/A*	40	43
HR74APAF	N/A*	40	43
JOSBAAN JORAAN	9	288	57 57
J10BAAN	8	160	57
K11BAB	6	240	25
K12BAB	10	400	25
K13BABN	12	384	25
K527APBXNR	3	120	38
K527ASBXNR	3	120	38
K528APBXNR	3	120	38
K528ASBXNR	3	120	38
KC25APBXN	N/A*	72	38
KC27AGBK	N/A*	80	40
KC27APBX	N/A*	48	38
KC27ASBX	N/A*	48	38
KC28AGBK	N/A*	80	40

NAILS (CONTINUED)					
ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE		
KC28ASBX	N/A*	48	38		
KC29APBX	N/A*	48	38		
KC29ASBX	N/A*	48	38		
KC31APBX	N/A*	40	38		
KD25AABS	N/A*	45	41		
KD25APBF	N/A* N/A*	40 45	42, 55		
KD25APBP KD25APBSN	N/A*	48	71		
KD27APBF	N/A*	40	42, 55		
KD27APBP	N/A*	45	71		
KD27APBSN	N/A*	48	41		
KD27APBSNR	3	96	41		
KD27ASBF	N/A*	24	42, 55		
KD27ASBS	N/A*	40	41		
KD27ASBSNR	3	96	41		
KD28APBF	N/A*	40	42, 55		
KD28APBSN	N/A*	48	41		
KD28APBSNR	3	96	41		
KD28ASBF	N/A*	24	42, 55		
KD28ASBS	N/A*	40	41		
KD28ASBSNR	3	96	41		
KD29APBF	N/A*	40	42, 55		
KD29APBSN	N/A*	48	41		
KD29ASBS	N/A*	40	41		
KE27ASBXN	N/A*	48	39		
KE28APBXN	N/A*	48	39		
KE28ASBXN	N/A*	48	39		
KT25APBF LC29APBX	N/A* N/A*	40 48	42, 56 38		
	20	960	24		
M001000 M001000R	20	840	24		
M001000R	16	768	24		
M001001R	20	840	24		
M00100110	6	480	24		
M001002R	20	840	24		
M001003	6	480	24		
M001003R	20	840	24		
M001004	6	384	24		
M001004R	16	640	24		
M001005	6	384	24		
M001005R	16	640	24		
M001006R	12	480	24		
M001007	6	288	24		
M001007R	12	480	24		
M002261	N/A*	100	44		
M002262	N/A*	100	44		
M002263	N/A*	100	44		
M002264	N/A*	100	44		
M002265	N/A*	100	44		
M002266 M003011	N/A* N/A*	24	43		
M003101	N/A*	56	49		
M003101	N/A*	56	49		
M003104	N/A*	48	49		
M003105	N/A*	40	49		
M003106	N/A*	40	49		
MD17AJBDN	N/A*	96	44		
MD17AQBD	N/A*	96	44		
MD25AJBDN	N/A*	96	44		
MD25AQBDN	N/A*	96	44		
MD27APBSN	N/A*	36	41		
MD28APBSN	N/A*	36	41		
MD34APBF	N/A*	36	42, 55		
ND25AJBDN	N/A*	96	44		
ND25AQBDN	N/A*	96	44		
R10BAB	12	480	25, 65		
R11BAB	12	480	25		
R13BAB	12	480	25		
RW17BPE	10	510	65		
RW19BPE	10	510	65		
RW21BPE	10	510	65		
SE15APB	N/A*	40	50		
SE15APBH	N/A*	40	50, 55		
SE17APBH	N/A*	40	50, 55		
SE19APB W3050VYS	N/A*	40 250	50 43		
W3050YXS W3075YXC	5	250 250	43		
W3100YXC	5	250	43		
W3125YXC	5	250	43		
	1	1 230	1 70		

NAILS (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
W3150YXC	5	250	43
ZX10EAA	6	576	22
ZX13EAA	6	576	22
ZX13EAAR	48	1728	22
ZX16EAA	6	576	22
ZX16EAAR	48	1728	22
ZX18EAA	4	432	22
ZX18EAAR	24	768	22
ZX21EAA	4	432	22
ZX21EAAR	24	768	22



STAPLES

STAPLES				
ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE	
A04BAAN	48	1152	61	
A06BABN	6	216	61	
A06BABP	8	192	61	
A08BAB A08BABP	12 8	288 192	61	
A809909R	20	560	25	
B04BAAPN	8	192	61	
B06BAAP	4	96	61	
B08BAAP	4	96	61	
CO2BAAPN CO3BAAPN	8	192 192	61	
C03BGAN	8	272	61	
C04BAAP	8	192	61	
C04BAAR	24	480	61	
C04BGAN C05BAAPN	8	272 192	61	
C06BAAP	4	96	61	
C06BAAR	24	480	61	
C06BGA	20	480	61	
CO6BHA	20	640	61	
C07BAAPN C08BAAP	4	96 96	61	
CO8BAAR	24	480	61	
C10BAAP	4	96	61	
C10BAAR	12	384	61	
D10BABN D10BABPN	6 8	216 192	61	
E06BAA	20	640	62	
E08BAA	16	512	62	
E10BAA	25	800	62	
F04BAAN	12	384	62	
F04BAAP F05BAAP	8	192 96	62 57, 62	
F06BAA	10	300	57, 62	
F06BAAP	4	96	57, 62	
F06BGA	10	300	57, 62	
FOSBAAN	8	240	57, 62	
G08BAB	20	96 640	57, 62 62	
H06BAA	20	480	51, 62	
H06BAAPR	15	600	62	
L06BAB	10	360	25	
L07BABP L08BAB	N/A* 8	112 288	25 25	
L10BABN	12	432	25	
L10BABR	24	672	25	
L10HABN	12	360	25	
L11BAB	10	360	25	
L11BABR L11BGA	24 10	672 360	25 25	
L11BGBR	24	672	25	
L11BRB	10	360	25	
L11HAB	10	288	25	
L11HBB L12BAB	10	180 360	25 25	
L13BABN	8	288	25	
L13BABR	24	672	25	
L13BRBN	8	288	25	
L14BAB L14BGA	6	216 216	25 25	
L14BGA L14BGBR	20	560	25	
L14BRB	6	216	25	
L15BAB	6	216	25	
L15BABR	20	560	25	
L15BRB L17BAB	6	216 216	25 25	
L17BABR	20	560	25	
M06BABN	7	224	26	
M08BAB	6	192	26	
M10BABN	9	288	26	
M10BRBN M11BABN	9 8	288 256	26 26	
M11BRBN	8	256	26	
M12BAB	6	192	26	
M13BAB	6	192	26	
M13BRB M15BAB	6 N/A*	192 60	26 26	
M17BAB	N/A*	48	26	
M004002	N/A*	180	51	

STAPLES (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
N08BABN	6	192	26, 45, 63
N08BBBN	6	192	26, 45, 63
N08FBB	6	192	26, 45, 63
N10BAB	6	192	26, 45, 63
N11BAB	6	192	26, 45, 63
N11FBB	6	192	26, 45, 63
N12BABN N12FABN	5	192 160	26, 45, 63 26, 45, 63
N13BAB	4	128	26, 45, 63
N13FAB	4	128	26, 45, 63
N14BAB	N/A*	56	26, 45, 63
N14BRB	N/A*	56	26, 45, 63
N15BAB	N/A*	56	26, 45, 63
N15BRB	N/A*	56	26, 45, 63
N16BAB	N/A*	56	26, 45, 63
N16BRB	N/A*	56	26, 45, 63
N17BAB N17BGB	N/A* N/A*	48 165	26, 45, 63 26, 45, 63
N17BRB	N/A*	48	26, 45, 63
N18BAB	N/A*	48	26, 45, 63
N18BRB	N/A*	48	26, 45, 63
N19BAB	N/A*	40	26, 45, 63
N19BGBN	N/A*	130	26, 45, 63
N19BRB	N/A*	40	26, 45, 63
N21BAB	N/A*	40	26, 45, 63
N21BGBN	N/A*	120	26, 45, 63
N21BRB	N/A*	40	26, 45, 63
PO6BAA	N/A*	60	44, 50
P08BABT P10BAB	N/A* N/A*	60 60	44, 50 44, 50
P10BPE	N/A*	60	44, 50
P10FAB	N/A*	60	44, 50
P11BAB	N/A*	50	44, 50
P11BPE	N/A*	50	44, 50
P12BAB	N/A*	40	44, 50
P13BAB	N/A*	40	44, 50
P13BABR	8	192	44
P13BGBN P13BPE	N/A*	60 40	44, 50
P15BAB	N/A* N/A*	30	44, 50 44, 50
P15BABR	8	192	44
P15BPE	N/A*	30	44, 50
P17BAB	N/A*	30	44, 50
P19BAB	N/A*	40	44
P21BAB	N/A*	40	44
Q15BAB	N/A*	64	45
Q17BAB	N/A*	64	45
Q17BRB Q19BAB	N/A* N/A*	64	45 45
Q19BAB Q19BRB	N/A*	64 64	45
Q21BAB	N/A*	56	45
Q21BRB	N/A*	56	45
Q23BRB	N/A*	48	45
Q25BAB	N/A*	48	45
Q25BGBN	N/A*	100	45
Q25BRB	N/A*	48	45
R11BAB	12	480	65
R13BAB U10BCA	12	480 320	65 57
U11BCA	10	240	57 57
W10BAB	10	400	61
X04NRA	N/A*	224	27
X06NRA	N/A*	224	27
X08NRA	N/A*	224	27
Y05BFA	10	320	27
			07
Y07BFA Y09BFAN	8	256 180	27 27

M004092


N/A*

180

SCREWS			
ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
06A125P	6	144	8
06A125PB	N/A*	72	8
06A162P	6	144	8
06A162PB 06A162W	N/A* 6	72 144	8
06A162W 06B125P	6	144	8
06B125PB	N/A*	72	8
06B162P	6	144	8
06B162PB	N/A*	72	8
06B200PB	N/A*	48	8
06C125CB	N/A*	72	8
06C125PB	N/A*	72	8
06C125WK	6 N/A*	240 72	8
06C162CB 06C162PB	N/A*	72	8
06C162WK	6	240	8
06C200CB	N/A*	48	8
06C200PB	N/A*	48	8
07A200P	6	144	8
07Q100PB	N/A*	72	8
07Q125PBQ	N/A*	72	8
08A250PK	6	192	8
08C300WK	6	144	8
08D175W	6	144	9
08D200W 08D250S	6	144	9
08D250S 08D250W	6	144	9
08D250WK	6	192	9
08D300W	6	144	9
08D300WK	6	144	9
08F150Y	6	144	8
08F150YTK	6	240	8
08F175Y	6	144	8
08F175YTK	6	240	8
08F200Y	6	144	8
08F200YBTHSS	N/A*	48	8
08F200YTK	6	192	8
08F250Y	6	144	8
08F250YK 08F300Y	6	192 144	8
08F3001 08G100CBWFDS	N/A*	72	8 9
08G150CTLDSS	6	144	9
08G162CTWFWS	6	144	9
08G200CKLFPS	6	192	9
08G200WTWFWS	6	144	9
08G250WWK	6	192	9
08L125CBLCTS	N/A*	72	8
08L175YB	N/A*	72	8
08M050CTRFDP	6	144	10
08M050CTRFSP	6	144	10
08M100CBPDSS	N/A*	72 144	11 9
08R250W 08R300W	6	144	9
08S250W003	6	144	9
08S250W497	6	144	9
08S250W592	6	144	9
08T125W	6	144	11
08T150WBWFDS	N/A*	72	11
08T200W	6	144	11
08X125CBACTS	N/A*	72	11
08X125CKADDS	6	240	11
08X200CKADDS	6	192	11
09D300S	6 N/A*	144	9
10G125CBWFDS 10G162CTWFWS	N/A* 6	72 144	9
10M075CDK	6	240	10
10M075CSK	6	240	10
10M075CTMFDS	6	144	10
10M075E0004B	N/A*	72	10
10M075E0014B	N/A*	72	10
10M075E0024B	N/A*	72	10
10M075E1114B	N/A*	72	10
10M075EBFT4X	N/A*	72	10
10M075YKFT4X	6	240	10
10M075YLFT4X	N/A*	48	10
10M075YTFFDX	6	144	10
10M100CKMFDS	6	240	10
12G175YKLFAX 12G200YKLFCX	6	240 192	9

SCREWS (CONTINUED)

ITEM CODE	BOXES/ CARTON	BOXES/ SKID	PAGE
12G250YKLFCX	6	192	9
12M087E000LFF4X	24	768	11
12M087E111LFF4X	24	768	11
12M087ELFF4X	24	768	11
12M087YKFF4X	6	240	10
12M100YKFF3X	6	240	10

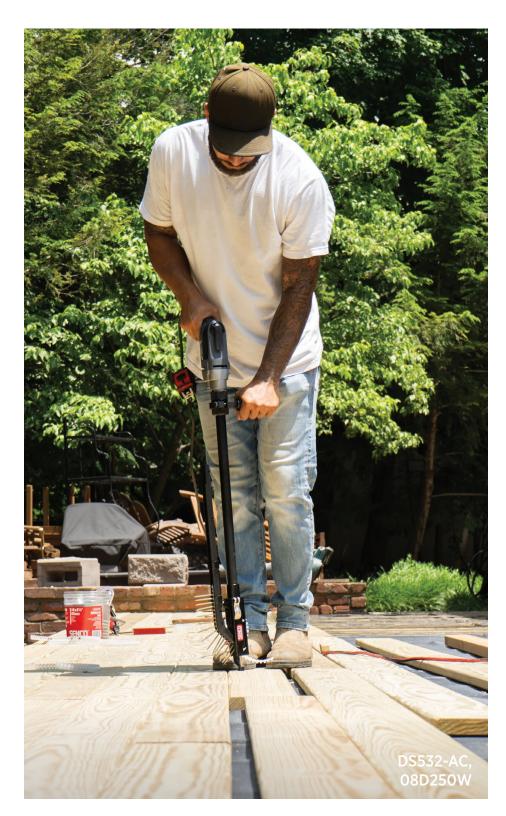

DURASPIN® ACCESSORIES		
ITEM CODE	PAGE	
EA0297	12	
EA0297N	12	
EA0298	12	
EA0298N	12	
EA0299	12	
EA0299N	12	
EA0300	12	
EA0301	12	
EA0301N	12	
EA0302	12	
EA0308	12	
EA0314	12	
EA0315	12	
EA0315N	12	
EA0316	12	
EA0316N	12	
EA0396P	12	
EA0397P	12	
EA0400	12	
EA0401	12	
EA0402	12	
FA0334	13	
FB0155	13	
FB0157	13	
FB0159	13	
FB0178	13	
FB0181	13	
FB0185	13	
FB0187	13	
FC0983	13	
FC1022	13	
FC1023	13	
HA0332	13	
MB0183	12	
MB0184	12	
MB0185	12	
MB0186	12	
MB0187	12	

PNEUM. ACC. (CONTINUED)

PNEUM. ACC. (CONTINUED)			
ITEM CODE	PAGE		
PC0489	75		
PC0501	74		
PC0502	74		
PC0503	74		
PC0504	74		
PC0505	74		
PC0506	74		
PC0576	74		
PC0577	74		
PC0629	76		
PC0630	76		
PC0643	75		
PC0656	75		
PC0657	75		
PC0900	74		
PC0977	73		
PC0978	73		
PC0979	73		
PC0983	75		
PC0987	75		
PC1138	75		
PC1152	73		
PC1166	76		
PC1295	76		
PC1319	73		
PC1320	73		
PC1321	73		
PC1322	73		
PC1323	74		
PC1325	74		
PC1328	74		
PC1330	74		
PC1337	73		
PC1338	73		
PC1339	73		
PC1340	73		
PC1341	73		
SWM125B	35		
XA211	70		
YB0123	76		

JN91H1, PC0064 & PC0505

PNEUMATIC ACCESSORIES		
ITEM CODE	PAGE	
CA0191	70	
CA0192	70	
CA0193	70	
HA0362	70	
HA0363	70	
HA0368	70	
HC0253	77	
HC0396	77	
HC0401	77	
HC0463	77	
HC0506	77	
HC0571	77	
HC0729	77	
HF0046	77	
HF0064	77	
HF0079	77	
HF0110	77	
HF0113	77	
NPC035	35	
PC0051	75	
PC0057	75	
PC0064	73	
PC0065	73	
PC0101	76	
PC0102	76	
PC0103	76	
PC0344	76	
PC0349	75	
PC0350	76	
PC0351	76	
PC0477	74	
PC0478	74	
PC0479	74	
PC0480	74	

BATTERIES/CHARGERS

ITEM CODE	PAGE
VB0189	77
VB0210	77
VB0212	77

EXTENDED MAGAZINES

ITEM CODE	PAGE
GA0767	76
GA0778	76

DURASPIN® AUTO-FEED SCREW SYSTEMS

COLLATED SCREWS	DRYWALL	WOOD/WOOD	DECKING	WOOD/STEEL	METAL/METAL	CEMENT BOARD	SPECIALTY
CS COLLATED SCREWS							Will State of the
PGS. 8-11	PG. 8	PG. 8	PG. 9	PG. 9	PG. 10	PG.11	PG. 11

. 66.6		. 5.5	. 5. 5
CORDLESS INTEGRATED	DS225-18V	DS222-18V	DS322-18V
CS COLLATED SCREWS	THE SAME OF THE SA		
PG. 3	PG. 3	PG. 3	PG. 3
	l	I	I
CORDED INTEGRATED	DS245-AC	DS242-AC	DS342-AC
CORDED INTEGRATED CS COLLATED SCREWS	DS245-AC	DS242-AC	DS342-AC

SCREWDRIVERS & SCREWDRIVER ATTACHMENT KITS	DS532-AC KIT	DS534-AC KIT	SG2510	SG4100
CS COLLATED SCREWS			200)	
PG. 5	PG. 5	PG. 5	PG. 5	PG. 5

2" AUTO-FEED SCREWDRIVER ATTACHMENTS	DS230-S1	DS230-M1	DS230-D1	DS230-D2
CSCREWS				
PG. 6	PG. 6	PG. 6	PG. 6	PG. 6

3" AUTO-FEED SCREWDRIVER ATTACHMENTS	DS530-S1	DS530-M1	DS530-D1
CS COLLATED SCREWS			00
PG. 7	PG. 7	PG. 7	PG. 7

FINISH & WOODWO	ORKING				
FINISH NAILS	F-15XP	FINISHPRO30®XP	TN51P1P	FINISHPRO®42XP	
15 _{GA}		DNAS	DNAS		
PG. 24	PG. 15	PG. 19	PG. 19	PG. 19	
FINISH NAILS	F-16XP	TN41P1P			
16 _{GA} STRAIGHT		BRID			
PG. 24	PG. 15	PG. 18	_		
BRAD NAILS	F-18XP	BN31M1P	LS1XP	SLP20XP	FINISHPRO®25XP
18 _{GA} BRAD		DA45	SENCO	THE CANADA	Parties 25 Trade
PG. 23	PG. 15	PG. 17	PG. 17	PG. 18	PG.18
FINISH STAPLES	F-LXP	SLS20XP-L	SLS25XP-L	SKSXP-L	LS61H1P
18 _{GA}		SENCO	SENCO		DNS O
PG. 25	PG. 15	PG. 20	PG. 20	PG. 20	PG. 21
FINISH STAPLES	SLS20XP-M	SLS25XP-M	SKSXP-M	FINISH STAPLES	SLS20XP-K

PG. 20

PG. 25

PG. 20

PG. 20

PG. 26

FINISH & WOODWORKING



FRAMING, SHEATHING & SUBFLOORS

COIL NAILS	SCN60XP	SCN65XP	HEAVY WIRE STAPLES	SQS55XP	
15° COIL	SEND	SENCO	15 _{GA}	SENCO	
PGS. 42-43	PG. 33	PG. 33	PG. 45	PG. 37	
HEAVY WIRE STAPLES	NS20XP	NS20BXP	SNS41	SNS45XP	SNS50XP
HEAVY WIRE STAPLES 16 N	NS20XP	NS20BXP	SNS41	SNS45XP	SNS50XP

FRAMEPRO®752XP

FRAMING, SHEATHING & SUBFLOORS

PLASTIC COLLATED NAILS

HEAVY WIRE STAPLES	PS15XP	PS20XP
16 _{GA}	S C C C C C C C C C C C C C C C C C C C	1 2 doi:
PG. 44	PG. 35	PG. 35

F-35FRHXP

21 °		SENCO	CUAS	DASS	DRS
PG. 41	PG. 29	PG. 30	PG. 32	PG. 32	PG. 32
PAPER TAPE NAILS	F-35XP	FN91T1	FRAMEPRO®325XP	FRAMEPRO°701XP	FRAMEPRO*751XP
30°		DINES		DNAS	DTHS.
PGS. 38-40	PG. 29	PG. 30	PG. 31	PG. 31	PG. 31

FRAMEPRO®325FRHXP

FRAMEPRO®702XP

FN81T1

MINI HAND NAILER	A20 HAND NAILER	CONCRETE PINS	SCP40XP
		CONCRETE PIN	SENIO
PG. 33	PG. 33	PG. 43	PG. 35

METAL CONNECTOR NAILS	JN91H1	JN91H1 JN91H2		JN91P2
METAL CONNECTOR	D)N95	DNAS	DANS	ONES
PG. 44	PG. 34	PG. 34	PG. 34	PG. 34


ROOFING, SIDING & FENCING

ROOFING, SIDING & FENCING				
ROOFING NAILS	ROOFPRO®445XP	COIL NAILS	SN71P1	
RF ROOFING	DINE	15° coil	ON93	
PG. 49	PG. 47	PGS. 49-50	PG. 47	
HEAVY WIRE STAPLES	PS15RXP	CAP & STAPLES	BC58	
16 _{GA}	SENIO CONTRACTOR OF THE PROPERTY OF THE PROPER	CAP		
PG. 50	PG. 48	PG. 51	PG. 48	
FINE WIRE STAPLES	A11 HAMMER STAPLER			
20 _{GA}				
PG. 51	PG. 48			

PALLETS & CRATING



UPHOLSTERY & FURNITURE

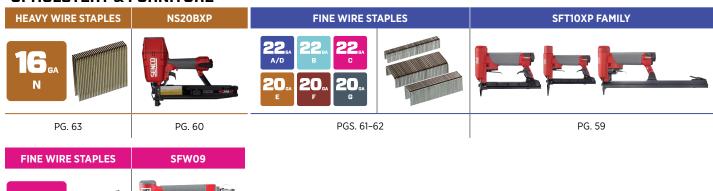

FLOORING

PG. 61

FLOORING CLEATS	SHF200	FLOORING STAPLES	SLS20XP-HF
FC FLOORING CLEATS		19 _{GA} R	SENCO
PG. 65	PG. 64	PG. 65	PG. 64

PG. 60

AIR COMPRESSORS & KIT


PC1131	PC0968	PC1280	PC1010	PC1010N	PC0947 KIT
SENCO E STATE OF THE PROPERTY	SENCO				
PG. 67	PG. 67	PG. 67	PG. 67	PG. 67	PG. 67

SMARTLOAD AUTOMATION



PGS. 38-40	PG. 69		PG. 41	PG. 69
PLASTIC COLLATED N	NAILS SC	N65XP-SL		
15° coil	SEN			
PG. 42-43, 71		PG. 69		

TURNYOUR SHOWROOM INTO A SENCO SHOWROOM

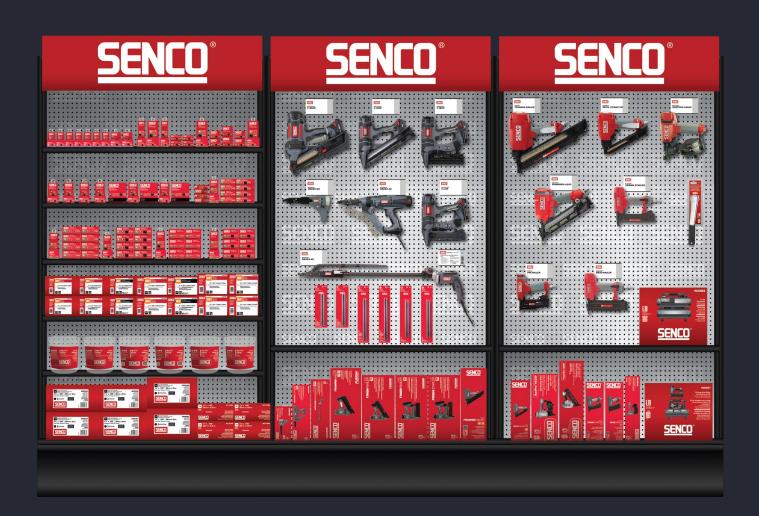



SENCO OFFERS A WIDE VARIETY OF RETAIL ASSORTMENTS DESIGNED TO FIT ANY STORE AND END USER.





VISIT US: SENCO.com

FOLLOW US:

youtube.com/sencobrands instagram.com/sencobrands facebook.com/sencobrands x.com/senco

CONTACT US:

KYOCERA SENCO Industrial Tools, Inc. 8450 Broadwell Road Cincinnati, Ohio 45244

Phone: 800.543.4596

